


3614

BOUNDARY LINE SURVEY



for LEONARD KELLEY
IN NE 1/4, SEC. 28
T5N R4W, W.M.
COLUMBIA COUNTY, ORE.
SCALE 1"=400' SEPT. 21, 1988

FOUND 1/4 CORNER 21 & 28
A 1" I.P. WITH LEAD CAP FROM
1958 CROWN ZELLEBACH 'PROPORTION'
40 FT. SOUTH OF RD. 4 & 4x4 POST AT PIPE.

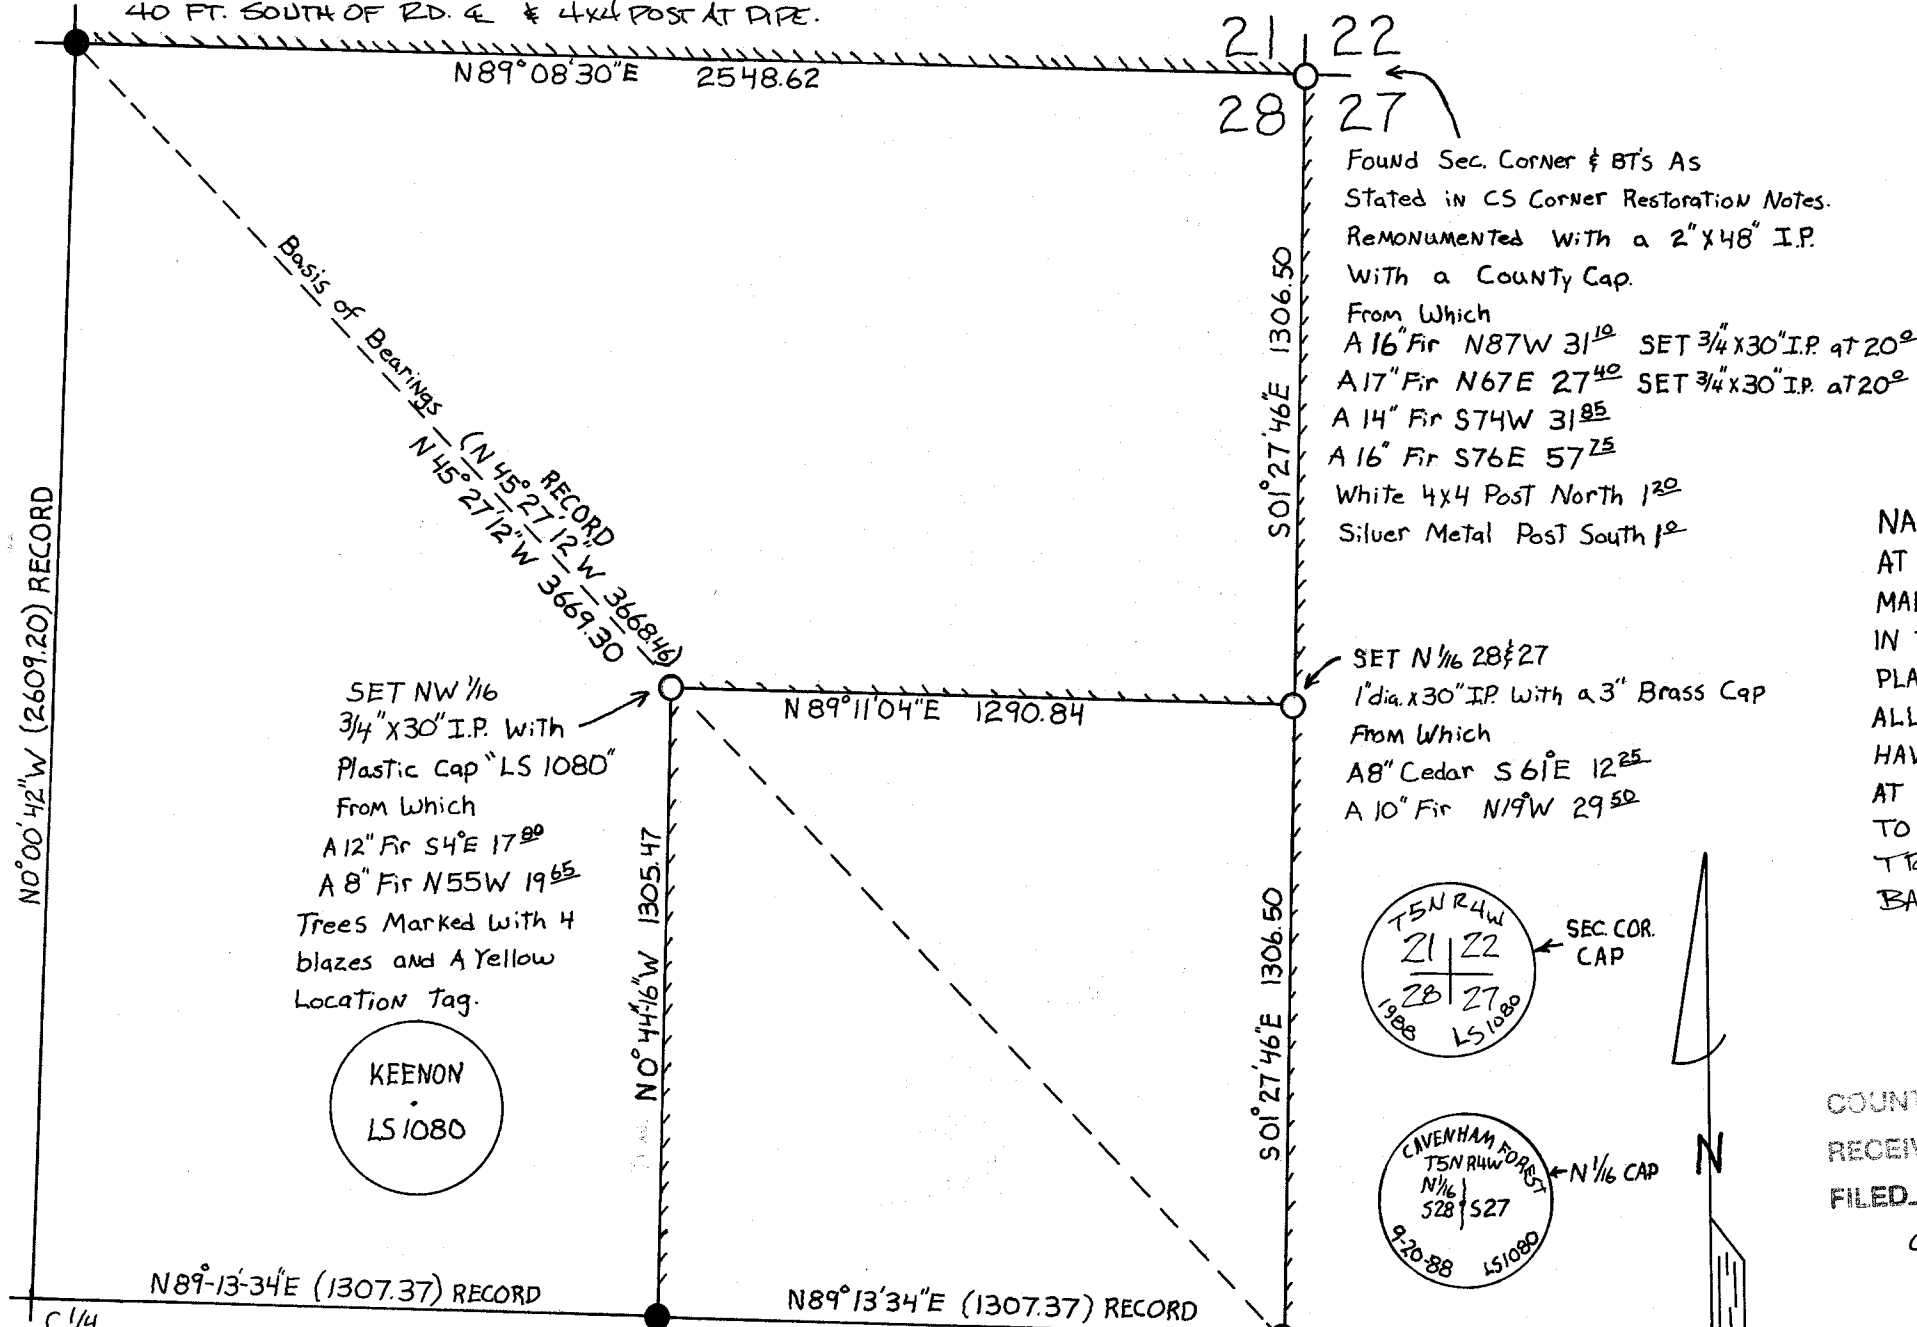

Found Sec. Corner & BT's As
Stated in CS Corner Restoration Notes.
Remonumented with a 2" x 48" I.P.
With a County Cap.
From Which
A 16" Fir N87W 31¹⁰ SET 3/4" x 30" I.P. at 20°
A 17" Fir N67E 27⁴⁰ SET 3/4" x 30" I.P. at 20°
A 14" Fir S74W 31⁰⁵
A 16" Fir S76E 57²⁵
White 4x4 Post North 1²⁰
Silver Metal Post South 1²⁰

SET N 1/6 28 & 27
1" dia. x 30" I.P. with a 3" Brass Cap
From Which
A 8" Cedar S 61°E 12²⁵
A 10" Fir N 19°W 29⁵⁰



NARRATIVE: THIS SURVEY WAS ACCOMPLISHED
AT THE REQUEST OF LEONARD KELLEY TO
MARK AND MONUMENT THE LINES SHOWN.
IN THE NE 1/4. BASIS FOR BEARINGS IS THE
PLAT OF RECORD CS 3534 DATED JULY 31, 1986
ALL NEW B.T.s FOR THE N 1/6 AND SEC CORNER
HAVE 4 BLAZES SPACED AT 6" WITH A BOAT SPIKE
AT THE BASE AND A YELLOW LOCATION TAG NAILED
TO EACH. THESE RP/B.T.s COATED WITH RED & BLUE
TREE MARKING PAINT.
BASIS OF BEARINGS FROM CS # 3534.

COUNTY SURVEYOR

RECEIVED 10-20-88
FILED 10-21-88 9:10
CS # 3614

FIELD CREW:

DON WALLACE
LES PHILLIPS
COREY COLBURN
L. JERRY KEENON
1311 ALDER ST.
VERNONIA, ORE. 97604
PH 429-6115

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
JULY 30, 1976
LESLIE G. KEENON
P.L.S. 1080

POINT CALCULATED FROM
CS 3534 DISTANCE-DISTANCE
INTERSECT

CE 1/16
Found Mon. as set in CS 3534
From Which
A 11" Fir S 43°W 6⁴
A 8" Fir N 68°E 2²
True CE 1/6 is N 42°21'50" W, 88
Found Mon. True CE 1/6 was NOT Set.

FOUND 1/4 CORNER 28 & 27
A 1" I.P. WITH LEAD CAP
From Which
A 24" Cedar N 12°W 41² Scribe Visible
A 25" Alder N 65°E 16⁵ Scribe Visible

3614

3614