


Configuring Cisecco radio units

This configuration guide applies to all Cisecco radio units: SRF, XRF and related and derived products.

Please note: our radio units come ready configured and work out-of-the-box. Only make changes if you know what you are doing!

Cisecco radio units have three configuration stores, that each play a different role:

1. Factory Configuration can only be changed by re-programming by the manufacturer.
2. Config Flash Memory holds the configuration settings that are adopted at power up.
3. Config Settings holds the settings that are in force during current operational mode.

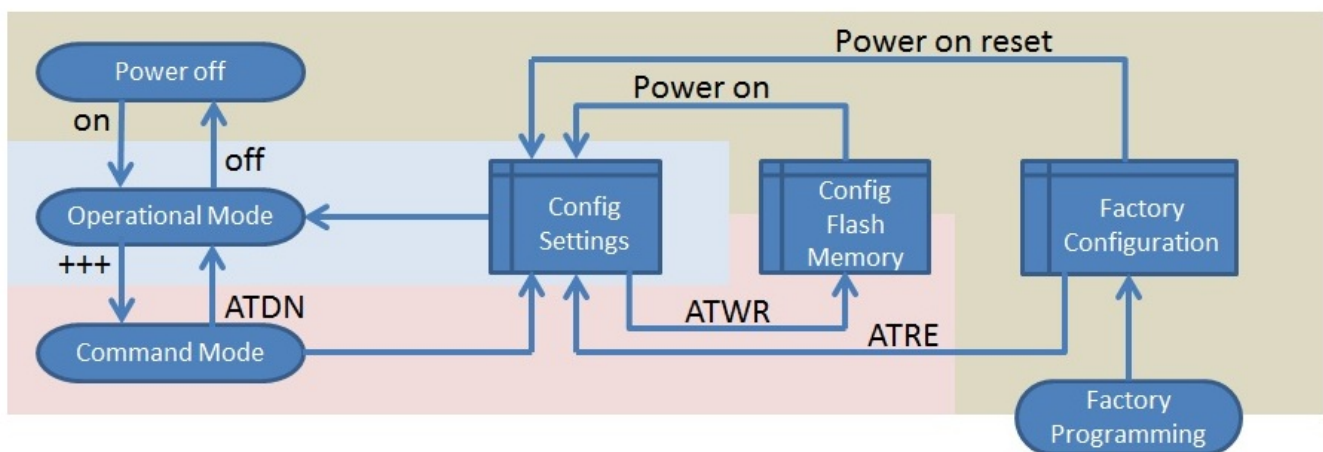

The diagram shows the three configuration stores with arrows showing how the contents of one store can be replaced by another.

When the Cisecco radio unit ships Config Flash Memory is identical to Factory Configuration.

When the RF unit powers up, the settings from Config Flash Memory are transferred to Config Settings.

All radio units have a Command Mode that allows Config Settings to be queried and modified. All changes are made to Config settings only and will be lost after the next power cycle. To make changes permanent across power cycles, the command ATWR must be issued. This will copy the content of Config Settings to Config Flash Memory so they will be loaded upon the next power up. Note that Config Flash Memory has a flash write cycle limit of 8000 over its life time.

Some of the changes to Config Settings (e.g. baud rate) affect communications with the device.

Such changes will only take effect after an explicit commit command (ATAC).

Entering and exiting Command Mode

You can enter Command Mode from Operational Mode by

1. Waiting at least one second since the last character was sent
2. Sending a string of exactly three Guard Characters and nothing else. The default Guard Character is +, so you would send +++ to a device with factory settings.
3. Awaiting the response from the radio unit: OK

You can exit Command Mode by

- Issuing the ATDN command (AT Done)
- Not sending any characters for a period of 5 seconds, after which the radio unit will exit Command Mode.

Reset to factory default

At times it may be useful to place a device in its default settings for testing or for recovery when an unknown configuration issue is encountered. There are two ways to get back to Factory default settings, without removing the settings in Config Flash Memory:

1. By shorting pins 12 and 13 during power up, the SRF will power up and copy Factory Configuration to Config Settings before entering Operational Mode.
2. When in Command Mode, issuing the ATRE command will load the content of Factory Configuration to Config Settings.

If you wish to retain Factory default configuration then you need to use the ATWR command to apply these settings to Config Flash Memory, otherwise at next power up the previously saved configuration will be used.

AT Commands

The table below sets out the commands available in AT mode.

AT Commands are followed by a <CR>

Command	Description	Notes												
AT	Null command	Does nothing. Can be used to keep the SRF from leaving Command Mode.												
ATAC	Apply Changes	Returns OK and then applies changes to baud rate, flow control, radio data rate and radio freq. where supported.												
ATBD	Baud rate	NOTE: If you have changed the baud rate then after the OK message you will need to change the baud rate at the other end. Requests / sets the Baud rate on the Serial data input. N												
		Not changed until applied (ATAC).												
		This command takes a hexadecimal parameter, as follows:												
		<table><tr><th>Baud rate</th><th>Parameter</th></tr><tr><td>1200</td><td>4B0</td></tr><tr><td>2400</td><td>960</td></tr><tr><td>4800</td><td>12C0</td></tr><tr><td>9600</td><td>2580 (Factory default)</td></tr><tr><td>31250</td><td>7A12 (MIDI)</td></tr></table>	Baud rate	Parameter	1200	4B0	2400	960	4800	12C0	9600	2580 (Factory default)	31250	7A12 (MIDI)
		Baud rate	Parameter											
1200	4B0													
2400	960													
4800	12C0													
9600	2580 (Factory default)													
31250	7A12 (MIDI)													

Last Updated on Sunday, 13 October 2013 11:41

3 / 5

ATRI	Set ID of node to remote program	Note that baud rate, radio data rate and radio frequency changes (the latter two for non-certified models) will only take effect when changes are applied (ATAC). To save the configuration (ATWR).
ATRO	Serial packet timeout	Requests / sets the ID of the node to be remotely programmed, using 2 characters. The Factory Default is "-" Requests / sets the serial packet time-out in milliseconds via a hexadecimal number in the range 1 – FFFF (1 – 65535 decimal). Factory Default is 10 (16ms)
ATRP	Enable remote programming	For more details regarding the choice of packet length and time out, please refer to http://openmicos.org/index.php/articles/84-xrf-basics/151-packet-length-and-time-out Used at the host SRF to enable remote programming: 0 – disable remote programming 1 – enable remote programming
ATRT	Set Rx to Tx transition delay	Factory Default – 0 Requests / sets the delay (in mS) used when switching the radio from receive to transmit. This should not normally be changed.
ATRW	Set remote programming timeout	Default – 3 Requests / sets the wait (in seconds) used in remote programming. If no communication is received for this time then remote programming mode is exited and any data is discarded. Range: 1 to 10(hex). Only alter this if you are using ATRC and have problems with it timing out.
ATSM	Sleep mode	Default – 5 seconds Sleep mode – controlled by the SLEEP pin. The SRF module will not sleep in AT command mode. 0 – no sleep, the SLEEP pin has no effect 1 – normal sleep: when the SLEEP pin is set high or un-connected the SRF will run; when the sleep pin is set low the SRF will sleep (power consumption when sleep is enabled is very low) 2 – deep sleep: when the SLEEP pin is set low the SRF will run, when the sleep pin is un-connected or set high the SRF will sleep. This is the sleep mode with the lowest power consumption.
ATTR	Set Tx to Rx transition delay	Requests / sets the delay (in mS) used when switching the radio from transmit to receive. This should not normally be changed.
ATVR	Firmware version number	Default – 0 Returns firmware revision number
ATWR	Write changes to flash memory	Saves config changes to flash memory. The config changes will be preserved for the next startup.
ATZZ	Support function - dump configuration	Note that Config Flash Memory has a limited number of write cycles (around 16000), this is based upon 16 configuration slots and the CC1110 data sheet which gives a maximum of 10000. Dump out configuration data in hexadecimal format to aid diagnosis for support.

The following are additional commands, not supported in certified modules:

ATCH	Frequency band	NOT SUPPORTED IN FCC/IC/EU CERTIFIED MODELS 1 – 915MHz (Factory default US & Canada) 2 – 903MHz 3 – 868MHz 4 – 433.5MHz 5 – 868.3MHz (Factory default Europe) 6 – 315MHz
ATCN	Channel number	Not changed until explicitly applied (ATAC) NOT SUPPORTED IN FCC/IC/EU CERTIFIED MODELS Requests / sets the Channel Number in the range 0-FF hexadecimal (0-255 decimal); the Factory Default is??
ATCS	Channel spacing	Not changed until explicitly applied (ATAC) NOT SUPPORTED IN FCC/IC/EU CERTIFIED MODELS Requests / sets the Channel Spacing in kHz in the range 1-FF hexadecimal (1-255 decimal); the Factory Default is C8 (200 decimal)

ATDR	Data rate	<p>Not changed until explicitly applied (ATAC) NOT SUPPORTED IN FCC/IC/EU CERTIFIED MODELS</p> <p>Requests / sets the radio data rate.</p> <p>1 – 250Kbaud (Factory Default)</p> <p>2 – 38.4Kbaud</p> <p>3 – 1.2KBaud</p> <p>4 – 100KBaud</p> <p>5 – 50KBaud</p>
ATRC	Set channel offset - used in remote programming	<p>Not changed until explicitly applied (ATAC) NOT SUPPORTED IN FCC/IC/EU CERTIFIED MODELS</p> <p>When remotely programming this command alters the radio channel used by the number specified. This is so that the remote programming traffic can be moved to an unused channel and other radio traffic will not interfere. E.g. if the radio is set to use channel 3 (ATCN 3) and channel 5 has been set (ATRC 5) then during remote programming channel 5 will be used.</p> <p>Factory Default - 0</p>