
How to achieve 32-bit timer resolution using the link system in STM32F10x and STM32L15x microcontrollers

Introduction

In many applications, 32-bit resolution is required to measure external signal periods of up to several hundreds of seconds or, to generate delays or periodic signals with large periods.

The STM32F10x and STM32L15x microcontrollers offer the possibility of chaining two 16-bit timers to obtain a 32-bit resolution based on a specific configuration of the timers and on the use of the timer link system.

This application note gives general guidelines to emulate a 32-bit timer. The two basic operating modes are presented: the input capture mode and the output compare mode. Each mode is treated independently and, each time, examples of applications are provided.

[Table 1](#) lists the microcontrollers concerned by this application note.

Table 1. Applicable products

Type	Part numbers / Product categories
Microcontrollers	STM32F10x and STM32L15x

Contents

1	STM32F10x and STM32L15x timer synchronization	4
1.1	Timer link system presentation	4
1.2	How to synchronize two timers using the link system	4
2	32-bit input capture timer resolution	6
2.1	Principle	6
2.2	Timer configuration	6
2.2.1	TIM3 master configuration	7
2.2.2	TIM2 slave configuration	8
2.2.3	Master and slave synchronization	8
3	32-bit output compare timer resolution	10
3.1	Principle and timer configuration	10
3.2	Output compare mode configuration	12
3.2.1	Output compare active mode example	12
3.2.2	Output compare toggle mode example	14
4	Revision history	16

List of figures

Figure 1.	Simplified TIM2 trigger controller block.	4
Figure 2.	Timer synchronization in input capture mode.	7
Figure 3.	Timer synchronization in output compare mode.	11
Figure 4.	TIM2 output signals in output compare active mode	13
Figure 5.	TIM2 output signals in output compare toggle mode	15
Figure 6.	TIM2 Channel1 output signal in output compare toggle mode	15

1 STM32F10x and STM32L15x timer synchronization

1.1 Timer link system presentation

In the STM32F10x and STM32L15x microcontrollers, the embedded timers can be linked together for timer synchronization or chaining purposes.

Using the timer link system, a timer configured in Master mode can:


- reset the counter of the slave timer
- start and/or stop the slave timer counter
- clock the slave timer counter.

1.2 How to synchronize two timers using the link system

In addition to the TIMx_CHx pins, timers have several internal triggers that are indispensable for linking and chaining operation.

Figure 1 shows a simplified representation of the timer block, that highlights the internal triggers. TIM2 is used as an example.

Figure 1. Simplified TIM2 trigger controller block

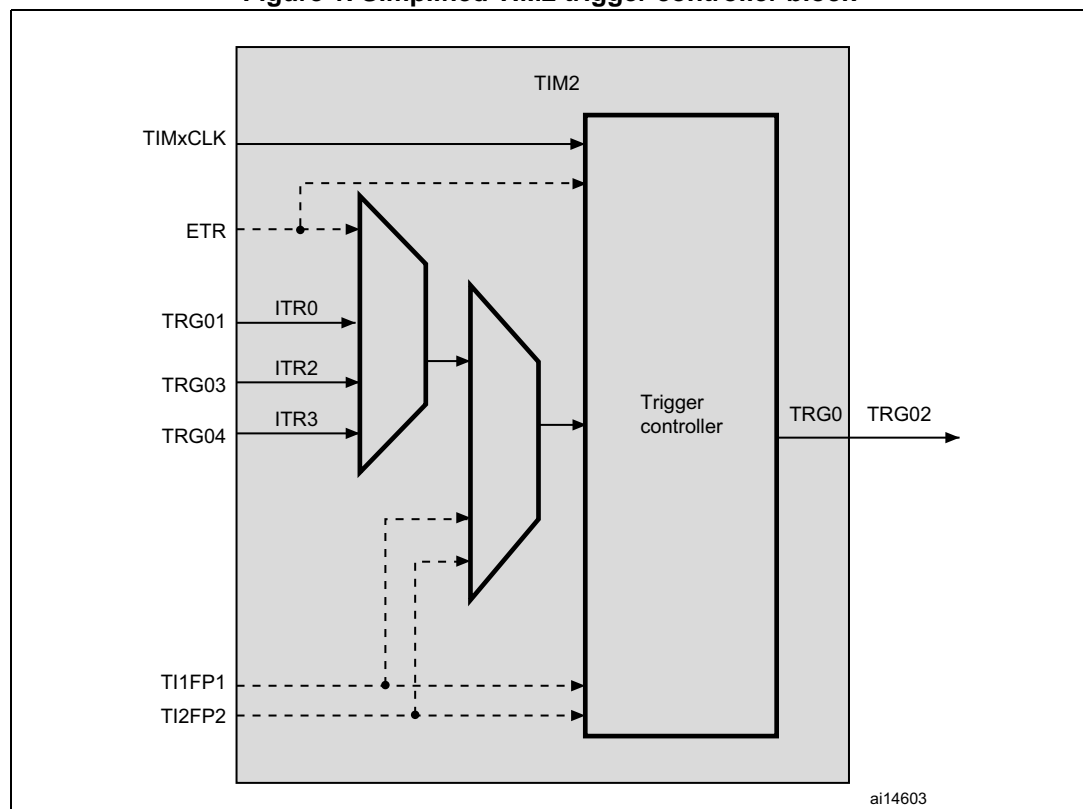

The internal triggers (ITR0, ITR2 and ITR3) are used when TIM2 is configured in the Slave mode. They then determine which master controls TIM2.

For example, if TIM2 uses ITR2 as an internal trigger, this means that TIM2 is synchronized with TIM3.

These triggers can be easily redirected to the master by setting the right combination of TS bits in the SMCR register.

The trigger output, TRGO, is used when TIM2 is configured in the Master mode. It then determines which events or signals are sent to the slave timers for synchronization.

Different events or signals can be transmitted to the slave, as listed below. They are selected using the MMS bits in the CR2 register.

- reset event
- enable event
- update event
- compare pulse
- OCxREF where x is 1, 2, 3 or 4.

Once the master trigger output, TRGO, and the slave's internal triggers, ITRx, are configured, the two timers are chained.

Four different slave modes can be selected using the SMS bits in the SMCR register:

- Reset mode: the rising edge of the trigger signal reinitializes the counter and generates an update of the registers.
- Gated mode: the slave counter start and stop are both controlled by the high level on the trigger input.
- Trigger mode: the start of the slave counter is controlled by the rising edge of the trigger input signal.
- External clock mode1: the slave counter is clocked by the rising edges of the selected trigger input signal.

2 32-bit input capture timer resolution

2.1 Principle

To measure the period of an external signal, the timer can be used in input capture mode. The frequency range that can be measured with the 16-bit timer depends on the TIMxCLK signal.

For example, if the timer of an STM32F10x is clocked by 72 MHz (TIMxCLK = 72 MHz), the minimum frequency F that can be measured is:

$$F = \frac{\text{TIMxCLK}}{\text{ARR}} = \frac{72 \times 10^6}{0xFFFF} = 1098 \text{ Hz}$$

Note: The maximum clock frequency of STM32L1 is 32 MHz. Therefore, the lowest measurable frequency is 488 Hz.


In some applications, the user needs to measure large periods. The idea is to increase the timer resolution from 16-bit to 32-bit using a specific configuration based on the timer link system.

2.2 Timer configuration

The measure is performed by two timers synchronized in a specific mode. The master measures the LSB part of the external signal period/frequency and the slave measures the MSB part. The two timers are used in input capture mode.

Figure 2 further explains the typical internal connection of the master and slave timers. TIM3 is used as the master for the TIM2 timer.

Figure 2. Timer synchronization in input capture mode

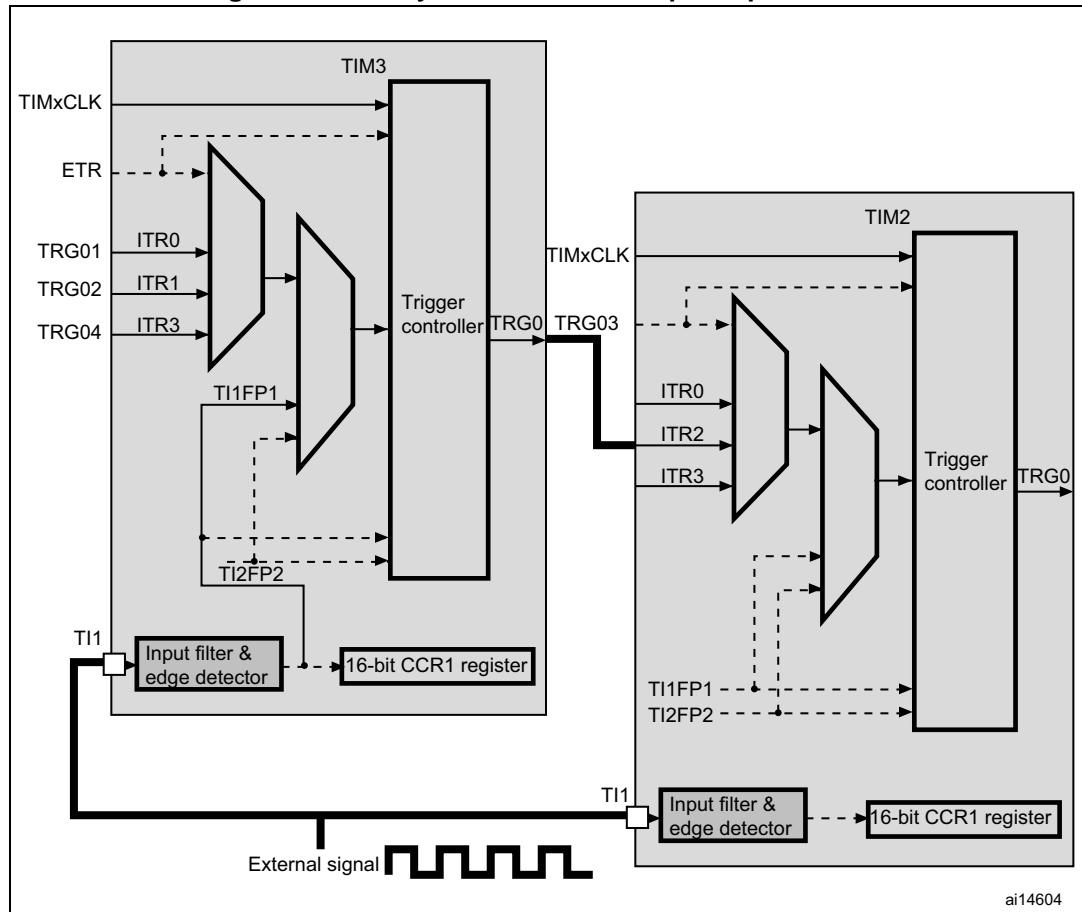

2.2.1 TIM3 master configuration

The master timer is used to measure the LSB part of the external period or frequency. To do so, it is configured as follows:

- no prescaler is used
- the external signal is connected to channel 1 and the rising edge is configured as the active edge.

The input capture module is used to latch the value of the counter after a transition detected by the corresponding input channel. To get the external signal period, two consecutive captures are needed and the period is calculated by subtracting these two values.

To avoid this method and facilitate the input capture measurement, the master counter is reset after each rising edge detected on the timer input channel by:

- selecting TI1FP1 as the input trigger by setting the TS bits in the SMCR register
- selecting the reset mode as the slave mode by configuring the SMS bits in the SMCR register.

Using this configuration, when an edge is detected, the counter is reset and the period of the external signal is automatically given by the value on the CCR1 register.

2.2.2 TIM2 slave configuration

The slave timer is used to measure the MSB part of the external frequency. To do so, it is configured as follows:

- prescaler is fixed to 0xFFFF
- the external signal is connected to channel 1 and the rising edge is configured as the active edge.

2.2.3 Master and slave synchronization

Master configuration

- Use the master update event as the master trigger output (TRGO).
- Enable the Master/Slave mode.

Slave configuration

- Select the slave input trigger: the master trigger output (TRGO) used as the input trigger for the slave.
- Enable the Master/Slave mode.
- Use the external clock mode 1 as the Slave mode: the slave is clocked by the update event of the master timer. That is, when the master counter is overflow, the slave counter is incremented.

Using this configuration, each time the period to be measured exceeds the 16-bit master timer Auto-reload register, an update event is generated to clock the slave timer.

When the active edge is detected on the master and slave timer inputs, the two counter values are copied into the master CCR1 register and the slave CCR1 register, respectively.

Since the slave is clocked by the master update event, the number of master overflow is recorded by the slave as the MSB part of the 32-bit input capture register; the LSB is read on the Master CCR1.

The external signal frequency is calculated on each master input capture interrupt as follows:

$$\text{ExtSignalFreq} = \frac{72 \times 10^6}{\text{MSB} \times 65535 + \text{LSB}}$$

LSB is the master capture compare register value (LSB = TIM3->CCR1 register value).

To get the MSB value, two consecutive captures are needed and the MSB variable is calculated by subtracting these two values as shown below:

If MSB1 > MSB2 then MSB = 0xFFFF – ((MSB1 – MSB2)) – 1

If MSB1 < MSB2 then MSB = (MSB2 – MSB1) – 1

MSB1 and MSB2 are given by the slave capture compare value (TIM2->CCR2 register value).

Since the master timer is used in Reset mode, when the active edge is detected on the master timer, the counter is reinitialized and an update is generated. To avoid this additional update event, 1 is subtracted from the MSB value.

Using this method, the lowest frequency that can be measured on STM32F10x, with TIMxCLK equal to 72 MHz, is 17 MHz instead of 1098 Hz when a 16-bit timer is used.

For STM32L1xx, the lowest measurable frequency is equal to 7.56 MHz instead of 488 Hz with a 16-bit timer only.

3 32-bit output compare timer resolution

3.1 Principle and timer configuration

The idea is to use two timers to generate a 32-bit resolution output compare signal; one timer that gives the MSB, and the other that provides the LSB of the 32-bit output compare signal.

Compare pulse is one of the master modes offered by the STM32 timers. With the Compare pulse mode selected, each time the CC1IF flag is to be set, that is, as soon as there is a compare match, the master trigger output (TRGO) sends a positive pulse.

In addition, if the timer master is being used in output compare mode, the LSB or MSB part of the 32-bit output compare signal is loaded into the master CCRx register. When the counter of the master reaches the loaded value, it triggers the other timer, causing it to generate the missing MSB or LSB.

To generate the MSB or the LSB part of the output compare signal, the slave timer must wait for the master trigger output signal and then start counting in order to introduce the missing 16-bit (LSB or MSB) part. For this, the slave timer has to be configured in the one-pulse mode (OPM).


The one-pulse mode is a particular case of the input capture and output compare modes. It allows the counter to be started in response to a stimulus, and to generate a pulse with a programmable length after a programmable delay.

The counter start can be controlled through the slave mode controller and the waveform can be generated in output compare mode. If the one-pulse mode (OPM) is selected by setting the OPM bit in the CR1 register, the counter stops automatically at the next update event.

The STM32 timers offer the possibility of redirecting the internal trigger (ITR) and of using it as the input signal for the capture/compare array. In this case, the internal trigger can be used as a stimulus for a slave timer initially configured in one-pulse mode (OPM). This is done by configuring the CCxS bits in the CCMRx register to be mapped on TRC.

This configuration allows the cascading of two timers to obtain a 32-bit time base resolution. [Figure 3](#) explains how the two timers are cascaded.

Figure 3. Timer synchronization in output compare mode

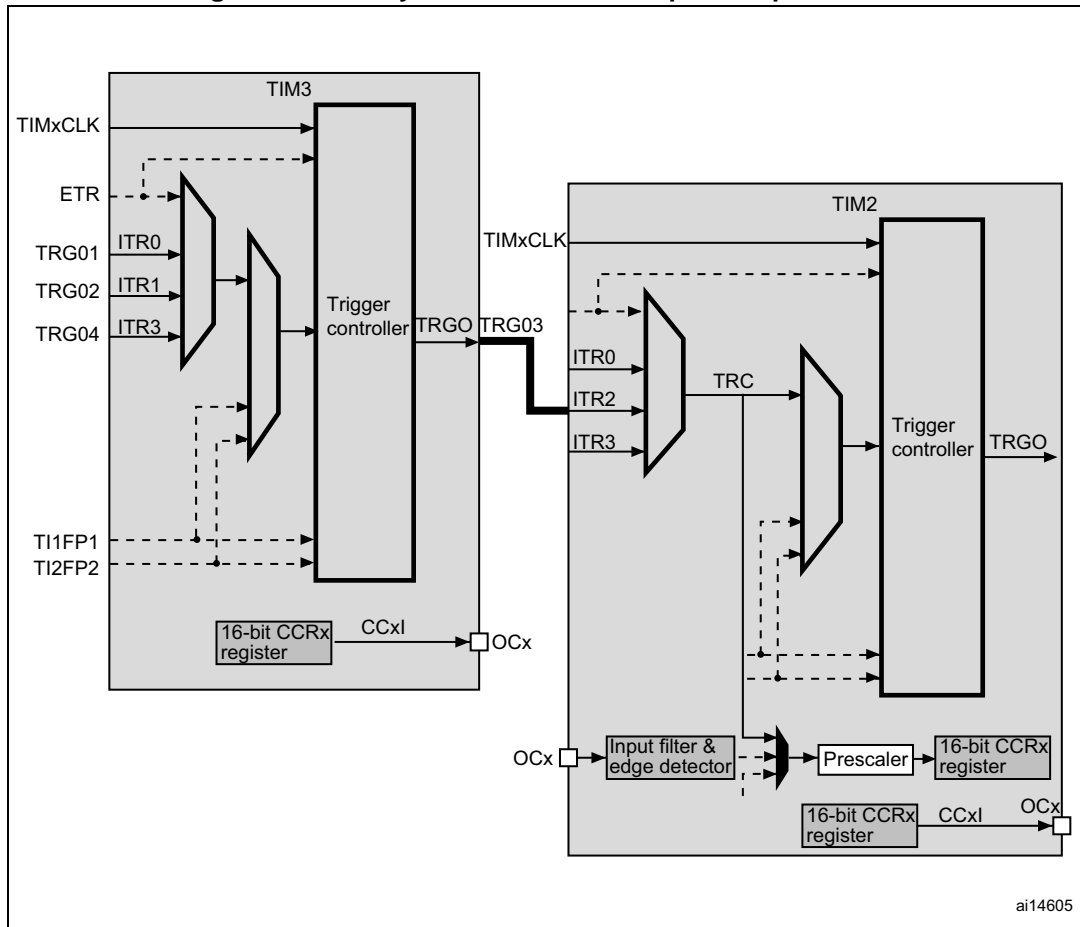

TIM3 is the master timer used in output compare mode; the trigger output (TRGO3) sends a positive pulse when the CC1IF flag is to be set as soon as a compare match occurs.

To connect the TRGO3 output of TIM3 to TIM2, TIM2 must be configured in slave mode using ITR2 as the internal trigger.

Then the slave mode controller is configured in trigger mode. This causes the TIM2 counter to be started at a rising edge of the TIM3 trigger signal (that corresponds to the TIM3 compare match).

The two timers are configured as described below.

TIM3 master configuration

- configure TIM3 in output compare mode, the CCRx register must be loaded with the LSB or the MSB part of the signal
- use the timer master compare pulse event as the trigger output (TRGO)
- set the prescaler value
- enable the master/slave mode.

TIM2 slave configuration

- TIM2 is used in one-pulse mode, so there are three steps of configuration:
 - the input capture module
 - the output compare module and the trigger controller
 - and the synchronization part.
- to configure the TIM2 timer, the user has to:
 - map TRC onto T1x by writing CCxS = '11' into the TIMx_CCMRx register
 - configure ITR2 as the trigger for the slave mode controller (TRGI) by writing TS = '010' in the TIMx_SMCR register
 - use the trigger mode as the slave mode by writing SMS to '110' in the TIMx_SMCR register: the counter start is controlled by the master
 - configure the output compare mode by setting the right combination of the OCxM bits in the TIMx_CCMRx register (OCxM can be set to '000', '001', '010' or '011'). The CCRx register must be loaded with the MSB or the LSB part
 - set the prescaler value
 - select the output pin by configuring the CCxS bits in the TIMx_CCMRx register
 - enable the one-pulse mode by setting the OPM bit in the TIMx_CR1 register. This causes the counter to stop at the next update event. So the counter start is controlled by the master but the stop is controlled by the counter itself.

3.2 Output compare mode configuration

3.2.1 Output compare active mode example

The following example is calculated for STM32F10x. Therefore, the maximum clock frequency is considered as 72 MHz. For STM32L1xx, 32 MHz has to be used instead.

Master configuration

TIM3 is used as the master timer in output compare active mode. For STM32F10x, TIM3CLK is equal to 72 MHz, no prescaler is used, so the TIM3 counter clock is equal to:

$$\text{TIM3 counter clock} = \text{TIM3CLK}/(\text{prescaler} + 1) = 72 \text{ MHz}$$

TIM3 generates the LSB part of the 32-bit output compare delay, and this delay value is loaded into the CCR1 register.

Slave configuration

TIM2 is used as the slave timer in one-pulse mode as described below:

- channel1, channel2 and channel3 are used in output compare active mode. The corresponding CCRx registers are loaded with the MSB part
- channel4 is used in input capture mode: CC4S is connected to TRC
- the prescaler is set to 0xFFFF
- the trigger mode is used as the slave mode

TIM2 is a slave for TIM3 so ITR2 is used as the internal trigger (TS = '010' in TIM2_SMCR register).

In one-pulse mode, the edge detection on TIM2 IC4 (TRC) sets the TIM2 counter enable (CEN) bit, which enables the counter.

When a match is found between the capture/compare register and the counter, the output compare function assigns the corresponding output pin with a programmable value determined by the output compare mode and the output polarity. In this example, after the programmed delays, the TIM2 pins are set to their active mode.

In this example, the three capture compare register values are TIM2_CCR1 = MSB1 = 0xC000, TIM2_CCR2 = MSB2 = 0xA000 and TIM2_CCR3 = MSB3 = 0x8000, respectively. TIM3_CCR1 = LSB = 0x8534.

The equations of the TIM2 output compare delays are given below and shown in [Figure 4](#).


$$\text{CC1 delay} = \frac{\text{MSB1} \times 65536 + \text{LSB}}{72 \times 10^6}, \text{ which gives CC1 delay} = 44,74 \text{ s.}$$

$$\text{CC2 delay} = \frac{\text{MSB2} \times 65536 + \text{LSB}}{72 \times 10^6}, \text{ which gives CC2 delay} = 37,28 \text{ s.}$$

$$\text{CC3 delay} = \frac{\text{MSB3} \times 65536 + \text{LSB}}{72 \times 10^6}, \text{ which gives CC3 delay} = 29,82 \text{ s.}$$

Note: The same configuration steps are used for the output compare inactive mode. The user only needs to place TIM2 in output compare inactive mode instead of output compare active mode, and then to go through the same steps.

[Figure 4](#) shows the three signals.

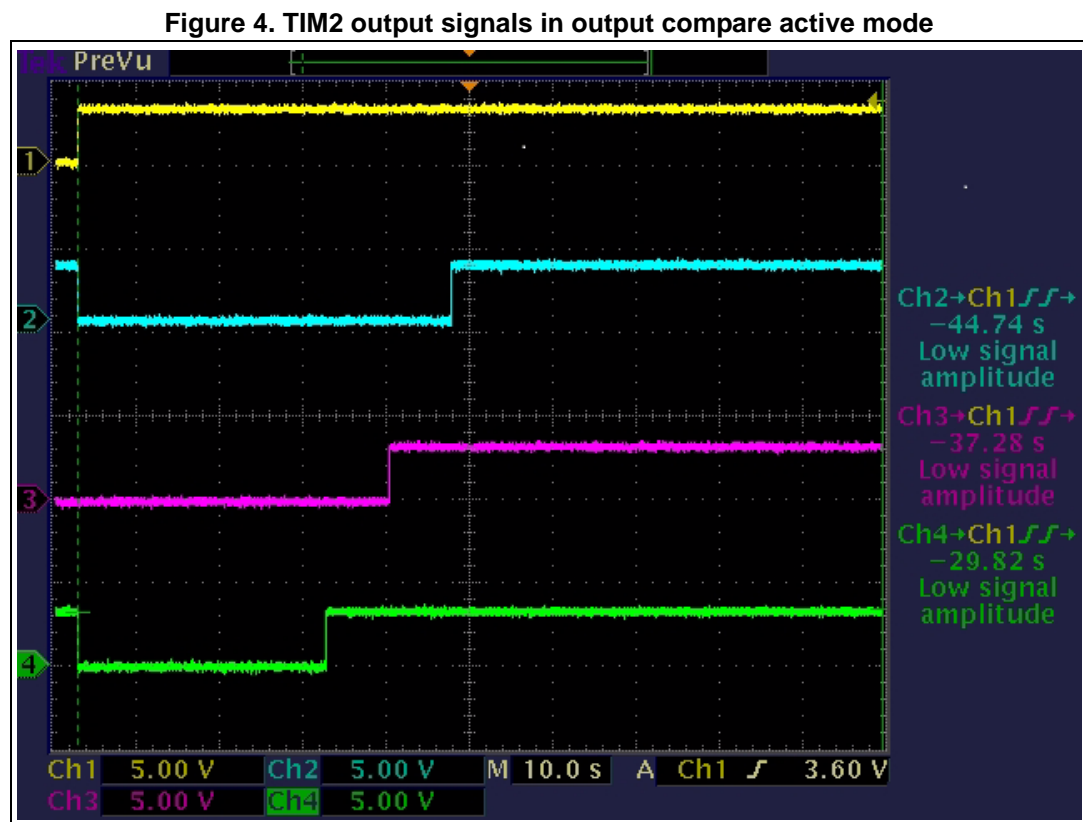

3.2.2 Output compare toggle mode example

The following example is calculated for STM32F10x. Therefore, the maximum clock frequency is considered as 72 MHz. For STM32L1xx, 32 MHz has to be used instead.

Master configuration

TIM3 is used as the master timer in output compare toggle mode. TIM3CLK is equal to 72 MHz. The prescaler is set to 0xFFFF.

TIM3 generates the MSB part of the 32-bit output compare delay, and this delay value is loaded into the CCR1 register.

Slave configuration

TIM2 is used as the slave timer in one-pulse mode as described below:

- channel 1, channel2 and channel3 are used in output compare toggle mode. The corresponding CCRx registers are loaded with the LSB part
- channel4 is used in input capture mode: CC4S is connected to TRC
- the prescaler is set to 0x0
- the trigger mode is used as the slave mode.

TIM2 is a slave for TIM3 so ITR2 is used as the internal trigger (TS = '010' in TIM2_SMCR register).

In one-pulse mode, the edge detection on TIM2 IC4 (TRC) sets the TIM2 counter enable (CEN) bit, which enables the counter.

When a match is found between the capture/compare register and the counter, the output compare function assigns the corresponding output pin with a programmable value determined by the output compare mode and the output polarity. In this example, when the match is found between the counter and the TIM2_CCRx registers, the TIM2 pins toggle and capture compare interrupts are generated. In the corresponding routine, the TIM2_CCRx registers are updated in order to have three periodic signals with three different frequencies.

In this example, the three capture compare register values are TIM2_CCR1 = LSB1 = 0x5FFF, TIM2_CCR2 = LSB2 = 0x9FFF and TIM2_CCR3 = LSB3 = 0xEFFF, respectively. TIM3_CCR1 = MSB = 0x1.

$$CC1 \text{ delay} = \frac{MSB \times 65536 + LSB1}{72 \times 10^6}, \text{ which gives: } CC1 \text{ delay} = 1,25 \text{ ms}.$$

$$CC2 \text{ delay} = \frac{MSB \times 65536 + LSB2}{72 \times 10^6}, \text{ which gives: } CC2 \text{ delay} = 1,48 \text{ ms}.$$

$$CC3 \text{ delay} = \frac{MSB \times 65536 + LSB3}{72 \times 10^6}, \text{ which gives: } CC3 \text{ delay} = 1,76 \text{ ms}.$$

Note: The same configuration steps are used for the output compare timing mode. The user only needs to place TIM2 in output compare timing mode instead of output compare toggle mode, and then to go through the same steps.

Figure 5 shows the three signals.

Figure 5. TIM2 output signals in output compare toggle mode


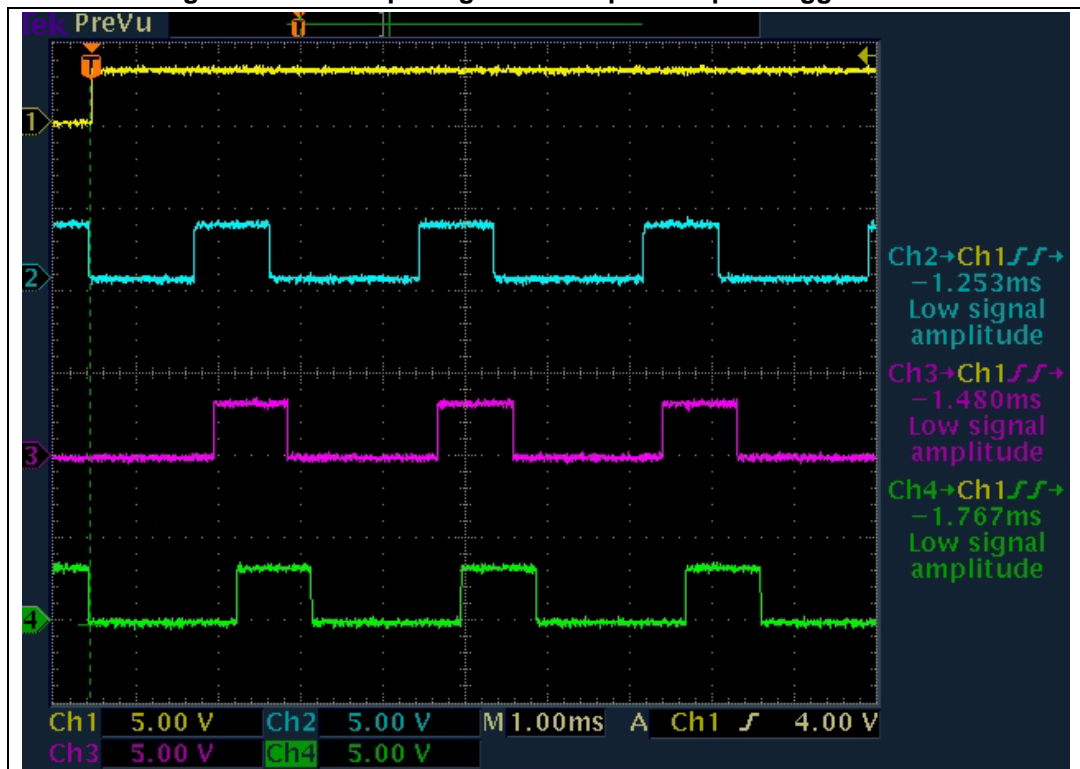


Figure 6 shows the maximum delay with the following configuration: MSB = LSB1 = 0xFFFF.

Figure 6. TIM2 Channel1 output signal in output compare toggle mode

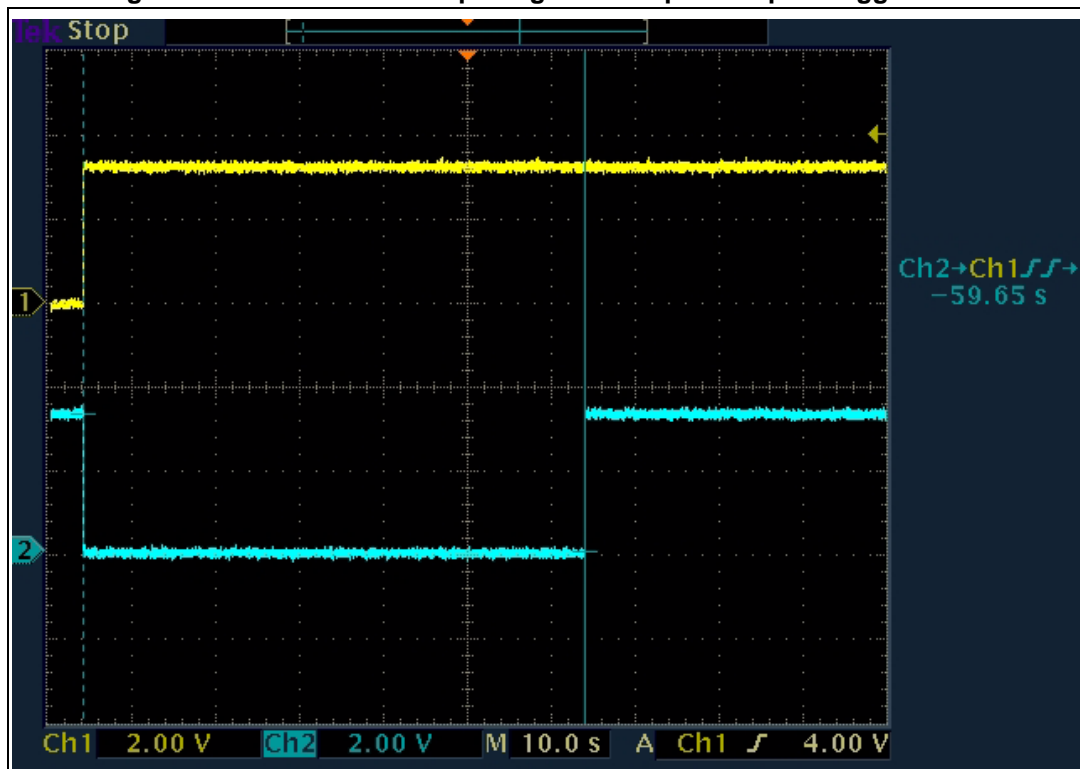

4 Revision history

Table 2. Document revision history

Date	Revision	Changes
31-Aug-2007	1	Initial release.
11-Jan-2011	2	Changed part number references to STM32F10x.
25-Jun-2013	3	Added STM32L15x part number. Changed "The maximum frequency" to "The frequency range" in Section 2.1: Principle and added a note. Changed "the maximum frequency" to "the lowest frequency" in Section 2.2.3: Master and slave synchronization and added a note. Added an introduction to Section 3.2.1: Output compare active mode example and to Section 3.2.2: Output compare toggle mode example . Updated Figure 4 and Figure 5 titles. Updated the disclaimer.

Please Read Carefully:

Information in this document is provided solely in connection with ST products. STMicroelectronics NV and its subsidiaries ("ST") reserve the right to make changes, corrections, modifications or improvements, to this document, and the products and services described herein at any time, without notice.

All ST products are sold pursuant to ST's terms and conditions of sale.

Purchasers are solely responsible for the choice, selection and use of the ST products and services described herein, and ST assumes no liability whatsoever relating to the choice, selection or use of the ST products and services described herein.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted under this document. If any part of this document refers to any third party products or services it shall not be deemed a license grant by ST for the use of such third party products or services, or any intellectual property contained therein or considered as a warranty covering the use in any manner whatsoever of such third party products or services or any intellectual property contained therein.

UNLESS OTHERWISE SET FORTH IN ST'S TERMS AND CONDITIONS OF SALE ST DISCLAIMS ANY EXPRESS OR IMPLIED WARRANTY WITH RESPECT TO THE USE AND/OR SALE OF ST PRODUCTS INCLUDING WITHOUT LIMITATION IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION), OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT.

ST PRODUCTS ARE NOT AUTHORIZED FOR USE IN WEAPONS. NOR ARE ST PRODUCTS DESIGNED OR AUTHORIZED FOR USE IN: (A) SAFETY CRITICAL APPLICATIONS SUCH AS LIFE SUPPORTING, ACTIVE IMPLANTED DEVICES OR SYSTEMS WITH PRODUCT FUNCTIONAL SAFETY REQUIREMENTS; (B) AERONAUTIC APPLICATIONS; (C) AUTOMOTIVE APPLICATIONS OR ENVIRONMENTS, AND/OR (D) AEROSPACE APPLICATIONS OR ENVIRONMENTS. WHERE ST PRODUCTS ARE NOT DESIGNED FOR SUCH USE, THE PURCHASER SHALL USE PRODUCTS AT PURCHASER'S SOLE RISK, EVEN IF ST HAS BEEN INFORMED IN WRITING OF SUCH USAGE, UNLESS A PRODUCT IS EXPRESSLY DESIGNATED BY ST AS BEING INTENDED FOR "AUTOMOTIVE, AUTOMOTIVE SAFETY OR MEDICAL" INDUSTRY DOMAINS ACCORDING TO ST PRODUCT DESIGN SPECIFICATIONS. PRODUCTS FORMALLY ESCC, QML OR JAN QUALIFIED ARE DEEMED SUITABLE FOR USE IN AEROSPACE BY THE CORRESPONDING GOVERNMENTAL AGENCY.

Resale of ST products with provisions different from the statements and/or technical features set forth in this document shall immediately void any warranty granted by ST for the ST product or service described herein and shall not create or extend in any manner whatsoever, any liability of ST.

ST and the ST logo are trademarks or registered trademarks of ST in various countries.

Information in this document supersedes and replaces all information previously supplied.

The ST logo is a registered trademark of STMicroelectronics. All other names are the property of their respective owners.

© 2013 STMicroelectronics - All rights reserved

STMicroelectronics group of companies

Australia - Belgium - Brazil - Canada - China - Czech Republic - Finland - France - Germany - Hong Kong - India - Israel - Italy - Japan - Malaysia - Malta - Morocco - Philippines - Singapore - Spain - Sweden - Switzerland - United Kingdom - United States of America

www.st.com

