
MILITARY SPECIFICATION SHEET

ENCLOSURE-PLASTIC, SUBMERSIBLE, (15-FOOT)

4-INCHES ROUND, GROUNDED

This specification sheet is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the enclosure described herein shall consist of this document and the latest issue of MIL-E-24142.

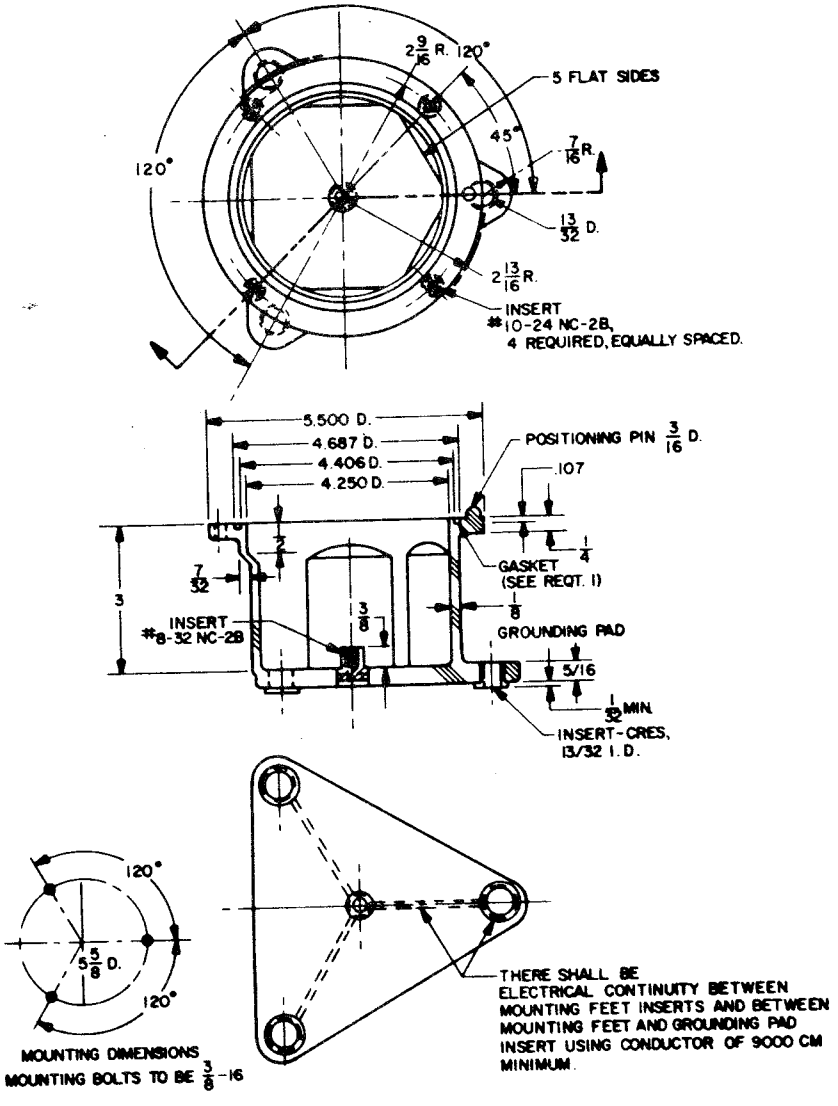

SH 10828


Figure 1 - Part no. M24142/13-001

FSC 5975

Source: https://assist.dla.mil -- Downloaded: 20261O-19T19:35Z
Check the source to verify that this is the current version before use.

NOTES:
1. All dimensions are in inches.
2. Unless otherwise specified, tolerances are ±1/64 inch for fractions and ±0.005 for decimals.
3. Angular tolerance ± 1/2 degrees.

REQUIREMENTS:
1. "O" ring gasket: In accordance with MIL-P-5516, class B, Durometer 65 ± 5, size ARP568-245.
2. Optional square gaskets may be substituted for "O" ring gaskets for plastic boxes.
3. Cover: Part no. M24142/11-002.
4. Material for M24142/13-001 and -002 shall be molded plastic type MA1-60 in accordance with MIL-M-14.
5. After the shock and vibration tests, the resistance of the ground path from the ground pad insert to each mounting foot insert, measured as shown in figure 2, shall not exceed 0.05 ohm.
6. This box (without cover) is for use with plastic integral cover and receptacles of MIL-R-2726/8,/9,/11, and /12.
7. Complete enclosure, box and cover, is alternate to 4-inch enclosure of MIL-E-24142.

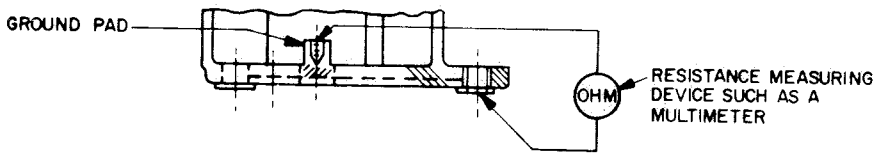

SH 10829

Figure 2

Preparing activity:
Navy - SH
(Project 5975-N478)

Source: https://assist.dla.mil -- Downloaded: 20261O-19T19:35Z
Check the source to verify that this is the current version before use.