FED. SUP. CLASS
5330

User activities:
USAF - 69
Navy - MC
Army - MO

Review activities:
USAF - 11, 69
Navy - WP
Army - WC, MI, MO

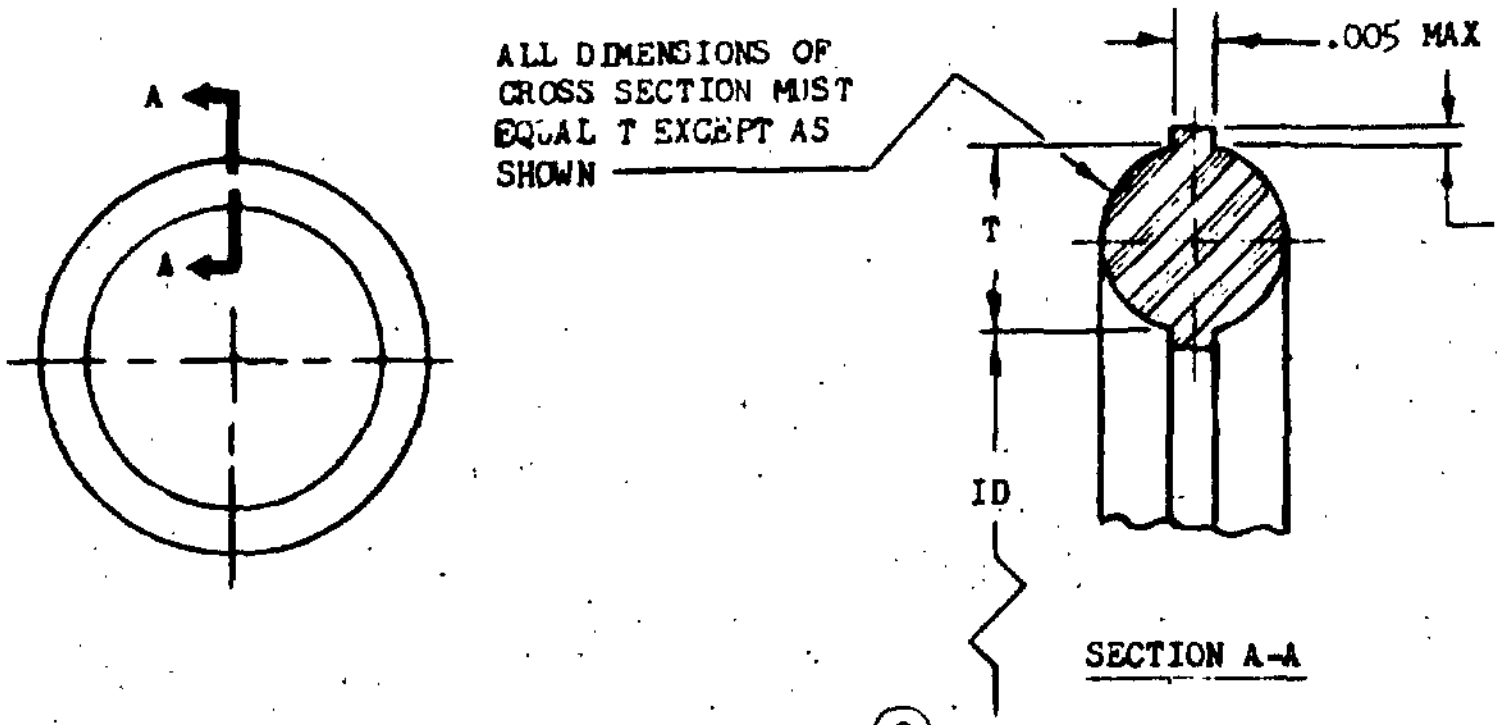
A
A
ALL DIMENSIONS OF CROSS SECTION MUST EQUAL T EXCEPT AS SHOWN
.005 MAX
.003 MAX
T
ID
SECTION A-A

② ②

RING SIZE	ID		T		(a) BASIC VOLUME CU IN	APPROX WEIGHT LBS/100	PART NO.
	MIN	MAX	MIN	MAX			
006	.109	.119	.067	.073	.0022	.010	*AN123956
007	.140	.150	.067	.073	.0026	.012	*AN123957
008	.171	.181	.067	.073	.0030	.014	*AN123958
009	.203	.213	.067	.073	.0034	.016	*AN123959
010	.234	.244	.067	.073	.0037	.017	*AN123960
011	.296	.306	.067	.073	.0045	.021	*AN123961
012	.359	.369	.067	.073	.0052	.024	*AN123962
110	.357	.367	.100	.106	.0122	.056	*AN123963
111	.419	.429	.100	.106	.0138	.063	*AN123964
112	.482	.492	.100	.106	.0154	.071	*AN123965
113	.544	.554	.100	.106	.0171	.079	*AN123966
114	.607	.617	.100	.106	.0187	.086	*AN123967
115	.669	.679	.100	.106	.0203	.093	*AN123968
116	.732	.742	.100	.106	.0220	.101	*AN123969
210	.728	.740	.135	.143	.0416	.191	*AN123970
211	.790	.802	.135	.143	.0446	.205	AN123971
212	.853	.865	.135	.143	.0476	.219	*AN123972
213	.915	.927	.135	.143	.0505	.232	AN123973
214	.978	.990	.135	.143	.0535	.246	*AN123974
215	1.040	1.052	.135	.143	.0565	.260	AN123975
216	1.103	1.115	.135	.143	.0595	.274	*AN123976
217	1.165	1.177	.135	.143	.0624	.287	AN123977
218	1.228	1.240	.135	.143	.0656	.302	*AN123978
219	1.290	1.302	.135	.143	.0684	.315	AN123979
220	1.353	1.365	.135	.143	.0714	.328	*AN123980
221	1.415	1.427	.135	.143	.0744	.342	AN123981
222	1.478	1.490	.135	.143	.0774	.356	*AN123982
223	1.599	1.619	.135	.143	.0833	.383	AN123983
224	1.724	1.744	.135	.143	.0893	.411	*AN123984
225	1.849	1.869	.135	.143	.0952	.438	AN123985
226	1.974	1.994	.135	.143	.1012	.466	*AN123986
227	2.099	2.119	.135	.143	.1072	.493	AN123987
228	2.224	2.244	.135	.143	.1131	.529	*AN123988
229	2.349	2.369	.135	.143	.1191	.548	AN123989
230	2.474	2.494	.135	.143	.1250	.575	*AN123990
231	2.599	2.619	.135	.143	.1310	.603	AN123991
232	2.719	2.749	.135	.143	.1370	.630	*AN123992
233	2.844	2.874	.135	.143	.1429	.657	AN123993
234	2.969	2.999	.135	.143	.1489	.685	*AN123994
235	3.094	3.124	.135	.143	.1548	.712	AN123995
236	3.219	3.249	.135	.143	.1608	.740	AN123996
237	3.344	3.374	.135	.143	.1668	.767	AN123997
238	3.469	3.499	.135	.143	.1727	.794	*AN123998
239	3.594	3.624	.135	.143	.1787	.822	AN123999
240	3.719	3.749	.135	.143	.1846	.849	AN124000
241	3.844	3.874	.135	.143	.1906	.877	AN124001
242	3.969	3.999	.135	.143	.1966	.904	*AN124002
243	4.094	4.124	.135	.143	.2025	.932	AN124003
244	4.219	4.249	.135	.143	.2085	.959	AN124004
245	4.344	4.374	.135	.143	.2144	.986	AN124005
246	4.469	4.499	.135	.143	.2204	1.014	*AN124006
247	4.594	4.624	.135	.143	.2264	1.041	AN124007
248	4.719	4.749	.135	.143	.2323	1.068	AN124008
249	4.844	4.874	.135	.143	.2383	1.096	AN124009
250	4.969	4.999	.135	.143	.2442	1.123	*AN124010
251	5.086	5.132	.135	.143	.2502	1.151	AN124011
252	5.211	5.257	.135	.143	.2561	1.178	AN124012
253	5.336	5.382	.135	.143	.2621	1.206	AN124013
254	5.461	5.507	.135	.143	.2681	1.233	*AN124014
255	5.586	5.632	.135	.143	.2740	1.260	AN124015
256	5.711	5.757	.135	.143	.2800	1.288	AN124016
257	5.836	5.882	.135	.143	.2859	1.315	AN124017
258	5.961	6.007	.135	.143	.2919	1.343	*AN124018
259	6.211	6.257	.135	.143	.3038	1.397	AN124019
260	6.461	6.507	.135	.143	.3157	1.452	AN124020
261	6.711	6.757	.135	.143	.3276	1.507	AN124021
262	6.961	7.007	.135	.143	.3396	1.562	*AN124022
263	7.204	7.264	.135	.143	.3515	1.617	AN124023
264	7.454	7.514	.135	.143	.3634	1.672	AN124024
265	7.704	7.764	.135	.143	.3753	1.726	AN124025
266	7.954	8.014	.135	.143	.3872	1.781	*AN124026
267	8.204	8.264	.135	.143	.3992	1.836	AN124027
268	8.454	8.514	.135	.143	.4111	1.891	AN124028
269	8.704	8.764	.135	.143	.4230	1.946	AN124029
270	8.954	9.014	.135	.143	.4349	2.000	*AN124030
271	9.204	9.264	.135	.143	.4468	2.055	AN124031
272	9.454	9.514	.135	.143	.4588	2.110	AN124032
273	9.704	9.764	.135	.143	.4707	2.165	AN124033
274	9.954	10.014	.135	.143	.4826	2.220	*AN124034

* PREFERRED SIZES

(a) FOR REFERENCE PURPOSES ONLY

MATERIAL: RUBBER AMS 7270.
DIMENSIONS IN INCHES.
DO NOT USE UNASSIGNED PART NUMBERS.
PARTS MUST BE NOT OLDER THAN 4 QUARTERS OF CURE DATE WHEN DELIVERED FROM THE MANUFACTURER OR HIS AGENT.

② IDENTIFICATION AND PACKAGING PER AMS 2817.

② CERTAIN PROVISIONS (RING SIZE AND DIMENSIONS) ARE THE SUBJECT OF INTERNATIONAL AGREEMENTS ABC AIR STD 17/27 AND STANAG 3444. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, THE DEPARTMENTAL CUSTODIANS WILL INFORM THEIR RESPECTIVE DEPARTMENTAL STANDARDIZATION OFFICES SO THAT APPROPRIATE ACTION MAY BE TAKEN RESPECTING THE INTERNATIONAL AGREEMENTS CONCERNED.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 8 June 49 REVISED ① 25 Apr 57 ② 24 Dec 64

P.A. USAF-11 Other Cust ② Navy-WP Army-MO	INTERNATIONAL INTEREST	**AIR FORCE-NAVY AERONAUTICAL STANDARD**	**AN123951** **THRU** **AN124050**
PROCUREMENT SPECIFICATION NONE		PACKING, PREFORMED - AMS 7270, 'O' RING	

U. S. GOVERNMENT PRINTING OFFICE

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:26Z
Check the source to verify that this is the current version before use.