
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN159801 THRU AN160100

FSC 5307

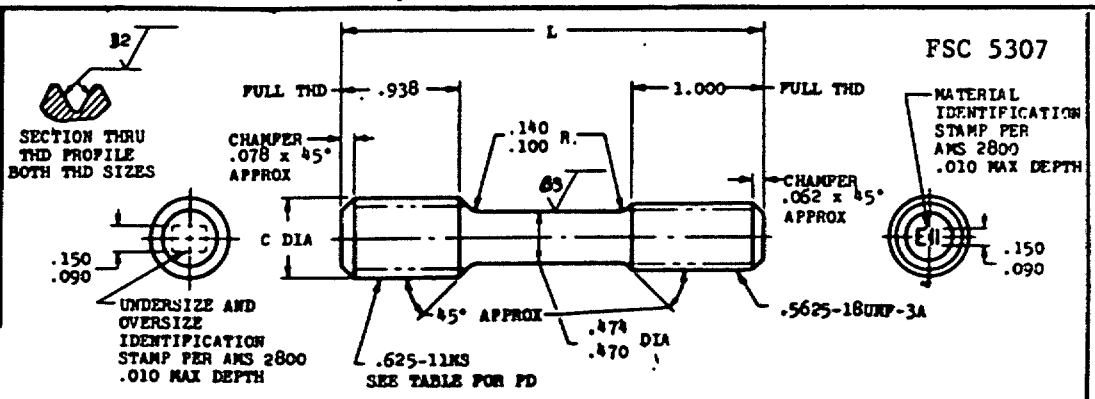

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (2)	+.012 (12)
C	.620- .625	.620- .625	.620- .625	.620- .625	.629- .634	.629- .634
FD BEFORE PLATING	.5682-.5692	.5712-.5722	.5742-.5752	.5772-.5782	.5802-.5812	.5832-.5842
FD AFTER PLATING	.5687-.5702	.5717-.5732	.5747-.5762	.5777-.5792	.5807-.5822	.5837-.5852
FD LEAD THREAD	.5610-.5630	.5640-.5660	.5670-.5690	.5700-.5720	.5730-.5750	.5760-.5780
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.188	AN159813	AN159814	AN159815	AN159816	AN159817	AN159818
2.250	AN159819	AN159820	AN159821	AN159822	AN159823	AN159824
2.312	AN159825	AN159826	AN159827	AN159828	AN159829	AN159830
2.375	AN159831	AN159832	AN159833	AN159834	AN159835	AN159836
2.438	AN159837	AN159838	AN159839	AN159840	AN159841	AN159842
2.500	AN159843	AN159844	AN159845	AN159846	AN159847	AN159848
2.562	AN159849	AN159850	AN159851	AN159852	AN159853	AN159854
2.625	AN159855	AN159856	AN159857	AN159858	AN159859	AN159860
2.688	AN159861	AN159862	AN159863	AN159864	AN159865	AN159866
2.812	AN159867	AN159868	AN159869	AN159870	AN159871	AN159872
2.938	AN159873	AN159874	AN159875	AN159876	AN159877	AN159878
3.062	AN159879	AN159880	AN159881	AN159882	AN159883	AN159884
3.188	AN159885	AN159886	AN159887	AN159888	AN159889	AN159890
3.312	AN159891	AN159892	AN159893	AN159894	AN159895	AN159896
3.438	AN159897	AN159898	AN159899	AN159900	AN159901	AN159902
3.562	AN159903	AN159904	AN159905	AN159906	AN159907	AN159908
3.688	AN159909	AN159910	AN159911	AN159912	AN159913	AN159914
3.812	AN159915	AN159916	AN159917	AN159918	AN159919	AN159920
3.938	AN159921	AN159922	AN159923	AN159924	AN159925	AN159926
4.062	AN159927	AN159928	AN159929	AN159930	AN159931	AN159932
4.188	AN159933	AN159934	AN159935	AN159936	AN159937	AN159938
4.312	AN159939	AN159940	AN159941	AN159942	AN159943	AN159944
4.438	AN159945	AN159946	AN159947	AN159948	AN159949	AN159950
4.562	AN159951	AN159952	AN159953	AN159954	AN159955	AN159956
4.688	AN159957	AN159958	AN159959	AN159960	AN159961	AN159962
4.812	AN159963	AN159964	AN159965	AN159966	AN159967	AN159968
4.938	AN159969	AN159970	AN159971	AN159972	AN159973	AN159974
5.062	AN159975	AN159976	AN159977	AN159978	AN159979	AN159980
5.188	AN159981	AN159982	AN159983	AN159984	AN159985	AN159986
5.312	AN159987	AN159988	AN159989	AN159990	AN159991	AN159992
5.438	AN159993	AN159994	AN159995	AN159996	AN159997	AN159998
5.562	AN159999	AN160000	AN160001	AN160002	AN160003	AN160004
5.688	AN160005	AN160006	AN160007	AN160008	AN160009	AN160010
5.812	AN160011	AN160012	AN160013	AN160014	AN160015	AN160016
5.938	AN160017	AN160018	AN160019	AN160020	AN160021	AN160022

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: [redacted] (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED . REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN159801 THRU AN160100
NONE	STUD-STEPPED, NECKED, 1.5 DIA ENGAGEMENT, .625-11 x .5625-18	

E-25-121

Project 5307-0396

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.