
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN162801 THRU AN163100

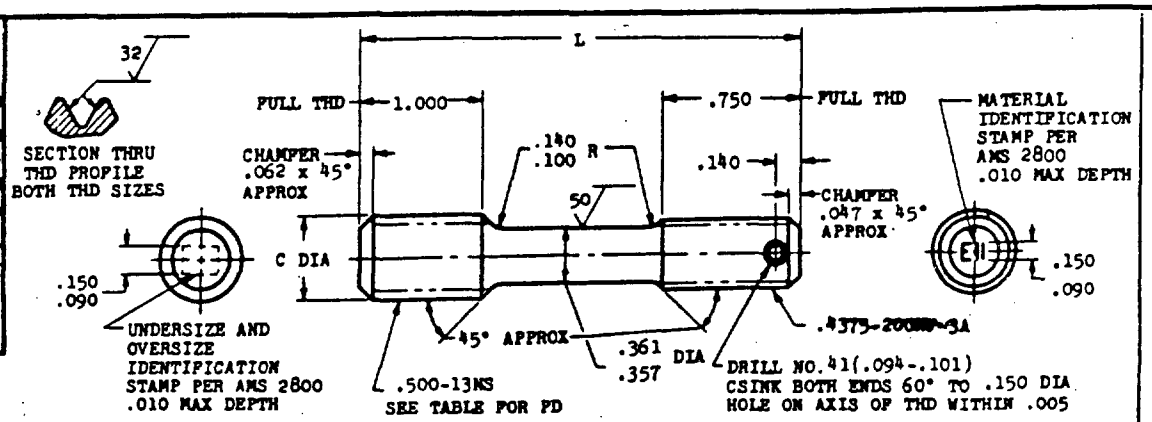

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.495- .500	.495- .500	.495- .500	.495- .500	.504- .509	.504- .509
PD BEFORE PLATING	.4518-.4528	.4548-.4558	.4578-.4588	.4608-.4618	.4638-.4648	.4668-.4678
PD AFTER PLATING	.4523-.4538	.4553-.4568	.4583-.4598	.4613-.4628	.4643-.4658	.4673-.4688
PD LEAD THREAD	.4450-.4470	.4480-.4500	.4510-.4530	.4540-.4560	.4570-.4590	.4600-.4620
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.000	AN162813	AN162814	AN162815	AN162816	AN162817	AN162818
2.062	AN162819	AN162820	AN162821	AN162822	AN162823	AN162824
2.125	AN162825	AN162826	AN162827	AN162828	AN162829	AN162830
2.188	AN162831	AN162832	AN162833	AN162834	AN162835	AN162836
2.250	AN162837	AN162838	AN162839	AN162840	AN162841	AN162842
2.312	AN162843	AN162844	AN162845	AN162846	AN162847	AN162848
2.375	AN162849	AN162850	AN162851	AN162852	AN162853	AN162854
2.438	AN162855	AN162856	AN162857	AN162858	AN162859	AN162860
2.500	AN162861	AN162862	AN162863	AN162864	AN162865	AN162866
2.562	AN162867	AN162868	AN162869	AN162870	AN162871	AN162872
2.625	AN162873	AN162874	AN162875	AN162876	AN162877	AN162878
2.688	AN162879	AN162880	AN162881	AN162882	AN162883	AN162884
2.750	AN162885	AN162886	AN162887	AN162888	AN162889	AN162890
2.875	AN162891	AN162892	AN162893	AN162894	AN162895	AN162896
3.000	AN162897	AN162898	AN162899	AN162900	AN162901	AN162902
3.125	AN162903	AN162904	AN162905	AN162906	AN162907	AN162908
3.250	AN162909	AN162910	AN162911	AN162912	AN162913	AN162914
3.375	AN162915	AN162916	AN162917	AN162918	AN162919	AN162920
3.500	AN162921	AN162922	AN162923	AN162924	AN162925	AN162926
3.625	AN162927	AN162928	AN162929	AN162930	AN162931	AN162932
3.750	AN162933	AN162934	AN162935	AN162936	AN162937	AN162938
3.875	AN162939	AN162940	AN162941	AN162942	AN162943	AN162944
4.000	AN162945	AN162946	AN162947	AN162948	AN162949	AN162950
4.125	AN162951	AN162952	AN162953	AN162954	AN162955	AN162956
4.250	AN162957	AN162958	AN162959	AN162960	AN162961	AN162962
4.375	AN162963	AN162964	AN162965	AN162966	AN162967	AN162968
4.500	AN162969	AN162970	AN162971	AN162972	AN162973	AN162974
4.625	AN162975	AN162976	AN162977	AN162978	AN162979	AN162980
4.750	AN162981	AN162982	AN162983	AN162984	AN162985	AN162986
4.875	AN162987	AN162988	AN162989	AN162990	AN162991	AN162992
5.000	AN162993	AN162994	AN162995	AN162996	AN162997	AN162998
5.125	AN162999	AN163000	AN163001	AN163002	AN163003	AN163004
5.250	AN163005	AN163006	AN163007	AN163008	AN163009	AN163010
5.375	AN163011	AN163012	AN163013	AN163014	AN163015	AN163016
5.500	AN163017	AN163018	AN163019	AN163020	AN163021	AN163022

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN162801 THRU AN163100
NONE	STUD-STEPPED, DRILLED, RECESSED, 2 DIA ENGAGEMENT, .500-13 x .4375-20	

E-25-121

Project 5307-0406

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.