
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN163401 THRU AN163700

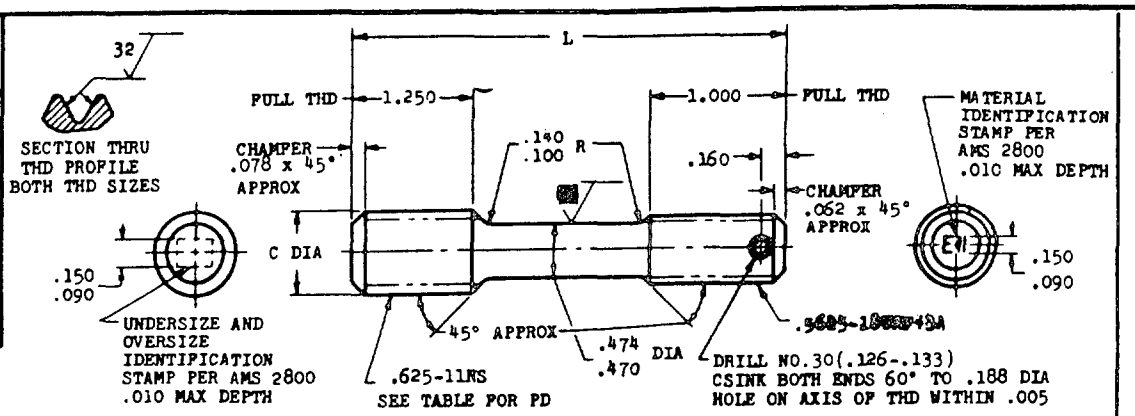

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD	.620- .625 .5682-.5692 .5687-.5702 .5610-.5630	.620- .625 .5712-.5722 .5717-.5732 .5640-.5660	.620- .625 .5742-.5752 .5747-.5762 .5670-.5690	.620- .625 .5772-.5782 .5777-.5792 .5700-.5720	.629- .634 .5802-.5812 .5807-.5822 .5730-.5750	.629- .634 .5832-.5842 .5837-.5852 .5760-.5780
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.500	AN163413	AN163414	AN163415	AN163416	AN163417	AN163418
2.562	AN163419	AN163420	AN163421	AN163422	AN163423	AN162424
2.625	AN163425	AN163426	AN163427	AN163428	AN163429	AN163430
2.688	AN163431	AN163432	AN163433	AN163434	AN163435	AN163436
2.750	AN163437	AN163438	AN163439	AN163440	AN163441	AN163442
2.812	AN163443	AN163444	AN163445	AN163446	AN163447	AN163448
2.875	AN163449	AN163450	AN163451	AN163452	AN163453	AN163454
2.938	AN163455	AN163456	AN163457	AN163458	AN163459	AN163460
3.000	AN163461	AN163462	AN163463	AN163464	AN163465	AN163466
3.125	AN163467	AN163468	AN163469	AN163470	AN163471	AN163472
3.250	AN163473	AN163474	AN163475	AN163476	AN163477	AN163478
3.375	AN163479	AN163480	AN163481	AN163482	AN163483	AN163484
3.500	AN163485	AN163486	AN163487	AN163488	AN163489	AN163490
3.625	AN163491	AN163492	AN163493	AN163494	AN163495	AN163496
3.750	AN163497	AN163498	AN163499	AN163500	AN163501	AN163502
3.875	AN163503	AN163504	AN163505	AN163506	AN163507	AN163508
4.000	AN163509	AN163510	AN163511	AN163512	AN163513	AN163514
4.125	AN163515	AN163516	AN163517	AN163518	AN163519	AN163520
4.250	AN163521	AN163522	AN163523	AN163524	AN163525	AN163526
4.375	AN163527	AN163528	AN163529	AN163530	AN163531	AN163532
4.500	AN163533	AN163534	AN163535	AN163536	AN163537	AN163538
4.625	AN163539	AN163540	AN163541	AN163542	AN163543	AN163544
4.750	AN163545	AN163546	AN163547	AN163548	AN163549	AN163550
4.875	AN163551	AN163552	AN163553	AN163554	AN163555	AN163556
5.000	AN163557	AN163558	AN163559	AN163560	AN163561	AN163562
5.125	AN163563	AN163564	AN163565	AN163566	AN163567	AN163568
5.250	AN163569	AN163570	AN163571	AN163572	AN163573	AN163574
5.375	AN163575	AN163576	AN163577	AN163578	AN163579	AN163580
5.500	AN163581	AN163582	AN163583	AN163584	AN163585	AN163586
5.625	AN163587	AN163588	AN163589	AN163590	AN163591	AN163592
5.750	AN163593	AN163594	AN163595	AN163596	AN163597	AN163598
5.875	AN163599	AN163600	AN163601	AN163602	AN163603	AN163604
6.000	AN163605	AN163606	AN163607	AN163608	AN163609	AN163610
6.125	AN163611	AN163612	AN163613	AN163614	AN163615	AN163616
6.250	AN163617	AN163618	AN163619	AN163620	AN163621	AN163622

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6329 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD
DO NOT USE UNASSIGNED PART NUMBERS. (3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN163401 THRU AN163700
NONE	STUD-STEPPED, DRILLED, RECESSED, 2 DIA ENGAGEMENT, .625-11 x .5625-18	

E-25-121

Project 5307-0408

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.