
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN166101 THRU AN166400

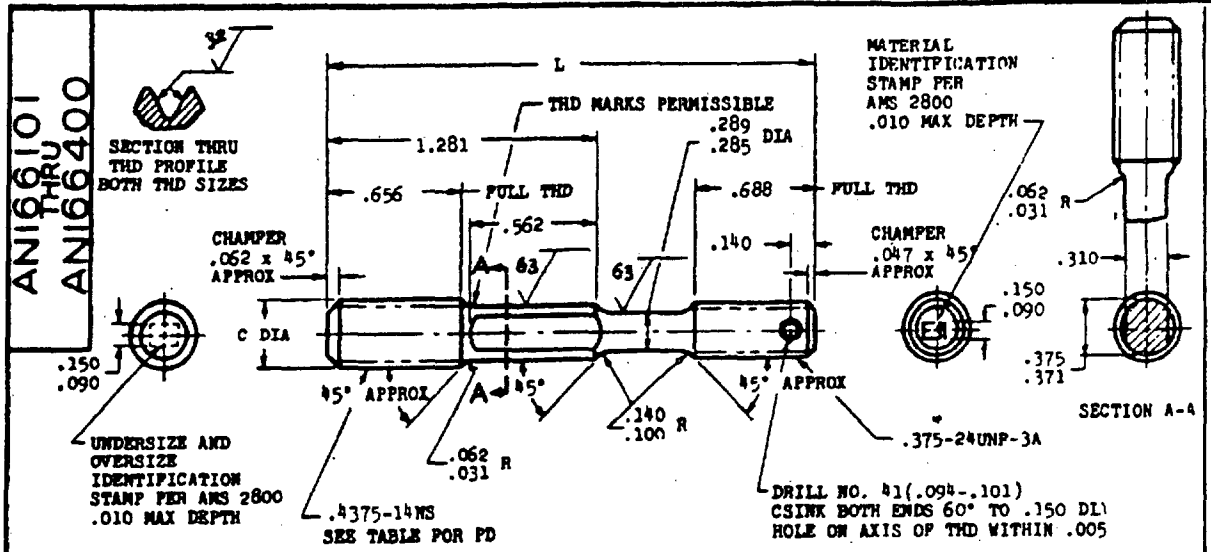

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING	.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING	.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD	.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.219	AN166113	AN166114	AN166115	AN166116	AN166117	AN166118
2.281	AN166119	AN166120	AN166121	AN166122	AN166123	AN166124
2.344	AN166125	AN166126	AN166127	AN166128	AN166129	AN166130
2.406	AN166131	AN166132	AN166133	AN166134	AN166135	AN166136
2.531	AN166137	AN166138	AN166139	AN166140	AN166141	AN166142
2.656	AN166143	AN166144	AN166145	AN166146	AN166147	AN166148
2.781	AN166149	AN166150	AN166151	AN166152	AN166153	AN166154
2.906	AN166155	AN166156	AN166157	AN166158	AN166159	AN166160
3.031	AN166161	AN166162	AN166163	AN166164	AN166165	AN166166
3.156	AN166167	AN166168	AN166169	AN166170	AN166171	AN166172
3.281	AN166173	AN166174	AN166175	AN166176	AN166177	AN166178
3.406	AN166179	AN166180	AN166181	AN166182	AN166183	AN166184
3.531	AN166185	AN166186	AN166187	AN166188	AN166189	AN166190
3.656	AN166191	AN166192	AN166193	AN166194	AN166195	AN166196
3.781	AN166197	AN166198	AN166199	AN166200	AN166201	AN166202
3.906	AN166203	AN166204	AN166205	AN166206	AN166207	AN166208
4.031	AN166209	AN166210	AN166211	AN166212	AN166213	AN166214
4.156	AN166215	AN166216	AN166217	AN166218	AN166219	AN166220
4.281	AN166221	AN166222	AN166223	AN166224	AN166225	AN166226
4.406	AN166227	AN166228	AN166229	AN166230	AN166231	AN166232
4.531	AN166233	AN166234	AN166235	AN166236	AN166237	AN166238
4.656	AN166239	AN166240	AN166241	AN166242	AN166243	AN166244
4.781	AN166245	AN166246	AN166247	AN166248	AN166249	AN166250
4.906	AN166251	AN166252	AN166253	AN166254	AN166255	AN166256
5.031	AN166257	AN166258	AN166259	AN166260	AN166261	AN166262
5.156	AN166263	AN166264	AN166265	AN166266	AN166267	AN166268
5.281	AN166269	AN166270	AN166271	AN166272	AN166273	AN166274
5.406	AN166275	AN166276	AN166277	AN166278	AN166279	AN166280
5.531	AN166281	AN166282	AN166283	AN166284	AN166285	AN166286
5.656	AN166287	AN166288	AN166289	AN166290	AN166291	AN166292
5.781	AN166293	AN166294	AN166295	AN166296	AN166297	AN166298
5.906	AN166299	AN166300	AN166301	AN166302	AN166303	AN166304

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

(3) CANCELED AS OF 9 OCT 87

(2) DO NOT USE UNASSIGNED PART NUMBERS.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 Mar 51 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN166101 THRU AN166400
	SLD-STEPPED, DRILLED, NECKED, WRENCH PAD, .5 DIA ENGAGEMENT, .4375-14 x .375-24	

E-25-121

Project 5307-0417

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.