
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

AN169701 THRU AN170000

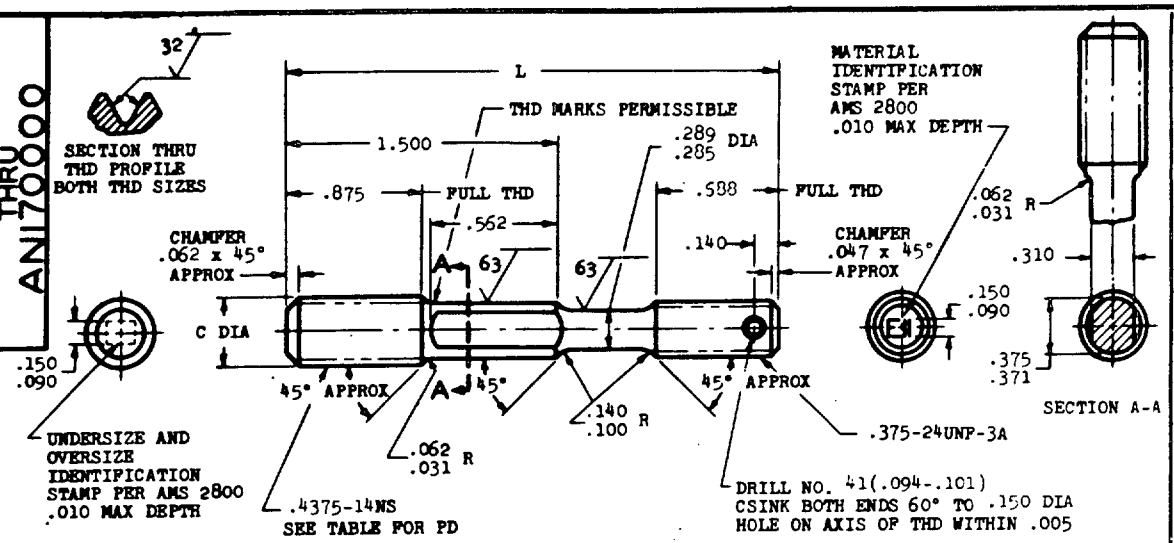

UNDERSIZE AND OVERSIZE IDENTIFICATION	-.003 (-3)	STANDARD	+.003 (3)	+.006 (6)	+.009 (9)	+.012 (12)
C	.433- .438	.433- .438	.433- .438	.433- .438	.442- .447	.442- .447
PD BEFORE PLATING	.3927-.3937	.3957-.3967	.3987-.3997	.4017-.4027	.4047-.4057	.4077-.4087
PD AFTER PLATING	.3932-.3947	.3962-.3977	.3992-.4007	.4022-.4037	.4052-.4067	.4082-.4097
PD LEAD THREAD	.3861-.3881	.3891-.3911	.3921-.3941	.3951-.3971	.3981-.4001	.4011-.4031
L	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
2.438	AN169713	AN169714	AN169715	AN169716	AN169717	AN169718
2.500	AN169719	AN169720	AN169721	AN169722	AN169723	AN169724
2.562	AN169725	AN169726	AN169727	AN169728	AN169729	AN169730
2.625	AN169731	AN169732	AN169733	AN169734	AN169735	AN169736
2.750	AN169737	AN169738	AN169739	AN169740	AN169741	AN169742
2.875	AN169743	AN169744	AN169745	AN169746	AN169747	AN169748
3.000	AN169749	AN169750	AN169751	AN169752	AN169753	AN169754
3.125	AN169755	AN169756	AN169757	AN169758	AN169759	AN169760
3.250	AN169761	AN169762	AN169763	AN169764	AN169765	AN169766
3.375	AN169767	AN169768	AN169769	AN169770	AN169771	AN169772
3.500	AN169773	AN169774	AN169775	AN169776	AN169777	AN169778
3.625	AN169779	AN169780	AN169781	AN169782	AN169783	AN169784
3.750	AN169785	AN169786	AN169787	AN169788	AN169789	AN169790
3.875	AN169791	AN169792	AN169793	AN169794	AN169795	AN169796
4.000	AN169797	AN169798	AN169799	AN169800	AN169801	AN169802
4.125	AN169803	AN169804	AN169805	AN169806	AN169807	AN169808
4.250	AN169809	AN169810	AN169811	AN169812	AN169813	AN169814
4.375	AN169815	AN169816	AN169817	AN169818	AN169819	AN169820
4.500	AN169821	AN169822	AN169823	AN169824	AN169825	AN169826
4.625	AN169827	AN169828	AN169829	AN169830	AN169831	AN169832
4.750	AN169833	AN169834	AN169835	AN169836	AN169837	AN169838
4.875	AN169839	AN169840	AN169841	AN169842	AN169843	AN169844
5.000	AN169845	AN169846	AN169847	AN169848	AN169849	AN169850
5.125	AN169851	AN169852	AN169853	AN169854	AN169855	AN169856
5.250	AN169857	AN169858	AN169859	AN169860	AN169861	AN169862
5.375	AN169863	AN169864	AN169865	AN169866	AN169867	AN169868
5.500	AN169869	AN169870	AN169871	AN169872	AN169873	AN169874
5.625	AN169875	AN169876	AN169877	AN169878	AN169879	AN169880
5.750	AN169881	AN169882	AN169883	AN169884	AN169885	AN169886
5.875	AN169887	AN169888	AN169389	AN169890	AN169891	AN169892
6.000	AN169893	AN169894	AN169895	AN159896	AN169897	AN169898
6.125	AN169899	AN169900	AN169901	AN169902	AN169903	AN169904

NOTE: PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.
MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
HARDNESS: ROCKWELL C26-32.
FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
SURFACE ROUGHNESS: AS 107.
MANUFACTURING SPECIFICATION: AMS 7456. PARTS SUBJECT TO MAGNETIC INSPECTION PER AMS 2640.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010,
ANGULAR DIMENSIONS ±2°.
DO NOT USE UNASSIGNED PART NUMBERS.

(2) INACTIVE FOR DESIGN AFTER 26 OCTOBER 1972. NO SUPERSEDING STANDARD.

(3) CANCELED AS OF 9 OCT 87

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 May 50 REVISED (1) 25 Mar 55 (2) 26 Oct 72 (3) 9 OCT 87

PROCUREMENT SPECIFICATION	AIR FORCE-NAVY AERONAUTICAL STANDARD	AN169701 THRU AN170000
NONE	[redacted] STUD-STEPPED, DRILLED, NECKED, WRENCH PAD, 2 DIA ENGAGEMENT, .4375-14 x .375-24	

E-25-121 PROJECT 5307-0429

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:28Z
Check the source to verify that this is the current version before use.