MILITARY SPECIFICATION SHEET

CABLE ASSEMBLY, (TYPE I), ELECTRONIC TEST EQUIPMENT, (2 POLES, 3 WIRES, 125 VOLTS, 13 AMPERES, 50 or 60 HERTZ), GROUNDING PLUG CONNECTOR

Ⓑ

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the cable assembly described herein shall consist of this specification and the latest issue of MIL-C-28777.

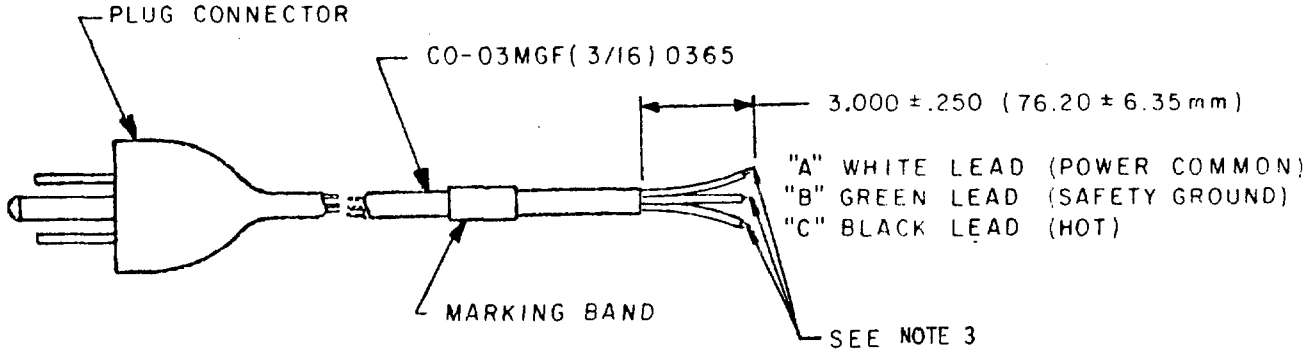

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. The equipment end of cable wires shall be stripped of insulation 1/2 inch and solder tinned.

FIGURE 1. Cable assembly.

Ⓑ denotes change

FSC 6150

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:13Z
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Cable-plug connector interface: The green lead (with or without a yellow stripe) shall be connected to the safety ground terminal, the black lead shall be connected to the line terminal, and the white for neutral shall be connected to the remaining terminal of the plug connector.

Type I cable assembly marking: Marking band shall be marked, with the cable assembly part number and the federal stock number (if assigned).

Part number: M28777/5-1.

Custodians:
Army - CR
Navy - EC
Air Force - 99

Review activities:
Navy - AS, MC
Air Force - 11, 85
DLA - GS, ES

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 6150-0170-05)

Source: https://assist.dla.mil -- Downloaded: 2026-10-20T15:13Z
Check the source to verify that this is the current version before use.