NN–H–106

JANUARY 9, 1934

FEDERAL STANDARD STOCK CATALOG

Section IV

(Part 5)

FEDERAL SPECIFICATION

FOR

HANDLES; WOOD, MISCELLANEOUS (FOR) TOOLS

This specification was officially promulgated by the Federal Specifications Board, January 9, 1934, for the use of the departments and independent establishments of the Government in the purchase of miscellaneous wood handles. The technical requirements of this specification shall become mandatory for all departments and independent establishments of the Government not later than July 15, 1934. They may be put into effect, however, at any earlier date after promulgation.

A. APPLICABLE FEDERAL SPECIFICATIONS

A–1. There are no other Federal specifications applicable to this specification.

B. TYPES AND GRADES

B–1. Miscellaneous tool handles shall be of the following types as specified.

- B–1a. Ship auger handles.
- B–1b. Bung borer handles.
- B–1c. Chisel handles, socket firmer.
- B–1d. File handles.
- B–1e. Saw handles.
- B–1f. Soldering iron handles.

B–2. Handles covered by this specification shall be of one grade only.

C. MATERIAL AND WORKMANSHIP

C–1. All handles shall be made of high quality, straight grained, sound, thoroughly seasoned wood (not over 12 percent moisture) of the species indicated in section E for the respective types.

D. GENERAL REQUIREMENTS

D–1. All handles shall show a smooth finish due to the usual sand and waxing belt operations or the application of shellac or varnish, and shall be free from manufacturing defects.

D–2. All handles shall be true to type and in size shall conform to the dimensions shown in the accompanying drawings. Where drawings are not shown, handles shall conform to commercial dimensions or to dimensions specified in the proposal with an allowable plus or minus tolerance of 1/16 inch.

E. DETAIL REQUIREMENTS

E–1. All handles must be free from defects.[1]

[1] Defects include knots, bird pecks, checks, splits, worm holes, sap stain, decay of any kind, and cross grain. (The term cross grain as here used means that the grain of the wood must not cross from one side of the handle to the other in the length of the handle.)

E–2. Ship auger handles shall have maple or hickory grips fitted snugly into malleable iron or drop-forged eyes (center part). Hickory grips shall have not more than 20 rings of annual growth per inch of radius. The metal eyes shall have a square hole suitable for straight square shanks 5/8 inch square. When specified each eye shall be capable of adjustment so as to hold straight square shanks varying from 5/8 to 3/4 inch. The handles shall be of the shape shown in the sketch below. The length and greatest diameter will be specified in each order and will depend on the size of the bit to be used.



SHIP AUGER HANDLE

E–3. Bung borer handles shall be of maple or hickory. Hickory handles shall have not more than 20 rings of annual growth per inch of radius.

E–4. Chisel handles shall be of hickory, with not more than 20 rings of annual growth per inch, of radius, hard (sugar) maple, or applewood. The top end of all handles shall be capped or tipped with at least three layers of high-grade leather, totaling at least 3/4 inch, securely fastened to the handle. The top end shall be so shaped and designed as to afford a maximum of resistance when subjected to blows with mallets, etc., as delivered under service conditions. These handles shall be similar to sketch below and shall be furnished in three sizes conforming to dimensions in table following.




CHISEL HANDLE

Size	Largest diameter of handle (grip)	Over-all length of handle	Tapered portion		
			Largest diameter	Smallest diameter	Length
	Inches	Inches	Inch	Inch	Inches
Small	1	5 1/4	1 1/16	3/4	1 1/16
Medium	1 1/16	6 3/4	7/8	1 1/32	1 1/4
Large	1 1/16	8 1/2	1	7/8	1 1/4

NOTE.—A plus or minus tolerance of 1/16 inch will be allowed in diameter of handles. A plus or minus tolerance of 1/4 inch will be allowed in over-all length. A plus tolerance of 1/16 inch will be allowed in the diameters of tapered portion. A plus or minus tolerance of 1/8 inch will be allowed in lengths of tapered portion.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

E–5. File handles shall be of any species of wood used commercially for the purpose. The front or small end of file handles shall be equipped with a substantial metal ferrule at least ¼ the length of the handle and not less than 22 gage (1/32 inch) or equally effective device designed to prevent the handle from splitting when tang end of file is inserted (forced) into the handle under service conditions. Suitable provision shall be made to prevent the ferrule or supporting device from becoming detached from the handle. Each handle shall be provided with a hole bored concentric with the axis of the handle. The hole shall be of suitable size for reception of tang end of files of sizes within the range for which the handle is designed. These handles shall be similar to sketch below and shall be furnished in three sizes conforming to dimensions in following table.

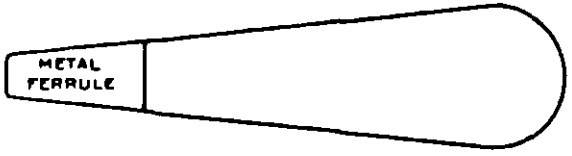

FILE HANDLE

Size	Diameter of large end of handle	Over-all length	Suitable for use with files of the following sizes
	Inches	Inches	Inches
Small	1	4	3– 6
Medium	1¼	4½	6–10
Large	1½	5½	10–14

NOTE.—A plus or minus tolerance of 1/16 inch in diameter and ¼ inch in over-all length in the above dimensions will be allowed.

E–6. Saw handles shall be of applewood and shall conform to the details given on the invitation for bids.

E–7. Soldering iron handles shall be of any species of wood used commercially for the purpose.

F. METHODS OF INSPECTION

F–1. Handles shall be inspected to determine whether they meet the requirements of this specification.

G. PACKAGING, PACKING, AND MARKING

G–1. Any special requirements of the Government are noted under section H.

G–2. Unless otherwise specified, commercial packages are acceptable under this specification.

G–3. Unless otherwise specified, shipping containers of the purchases of departments and establishments of the United States Government shall be marked with the name of the material, grade, and quantity contained therein, as defined by the contract or order under which shipment is made, the name of the contractor, and the number of the contract or order.

H. REQUIREMENTS APPLICABLE TO INDIVIDUAL DEPARTMENTS

H–1. *Navy*: Navy Department General Specifications for Inspection of Material, copies of which may be obtained from the Bureau of Supplies and Accounts, Navy Department, Washington, D.C., except that naval activities should make application to the Commandant, Navy Yard, New York, N.Y.

I. NOTES

I–1. The proposals should state the type, size, and quantity of handles desired.

I–2. It is believed that this specification is adequate and that normally no samples will be necessary to determine compliance with the requirements, prior to award. If, for a particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

I–3. The illustrations herein are for convenience and are not intended to preclude the purchase of miscellaneous tool handles which are otherwise in accordance with this specification.

I–4. This specification governs all United States Government purchases of miscellaneous wood handles. Users are requested to retain this specification in permanent file until a revision is issued.

I–5. An alphabetical index of Federal specifications may be obtained upon application as noted in paragraph next below, price to be obtained from the Superintendent of Documents.

I–6. Copies of this specification may be obtained upon application accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington, D.C. Price 5 cents.

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

For sale by the Superintendent of Documents, Washington, D.C. - - - - Price 5 cents

GSA-WASH DC 52-1676

Source: https://assist.dla.mil — Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.