USER SYMBOLS:
REVIEWER SYMBOLS:
"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."
This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
4730

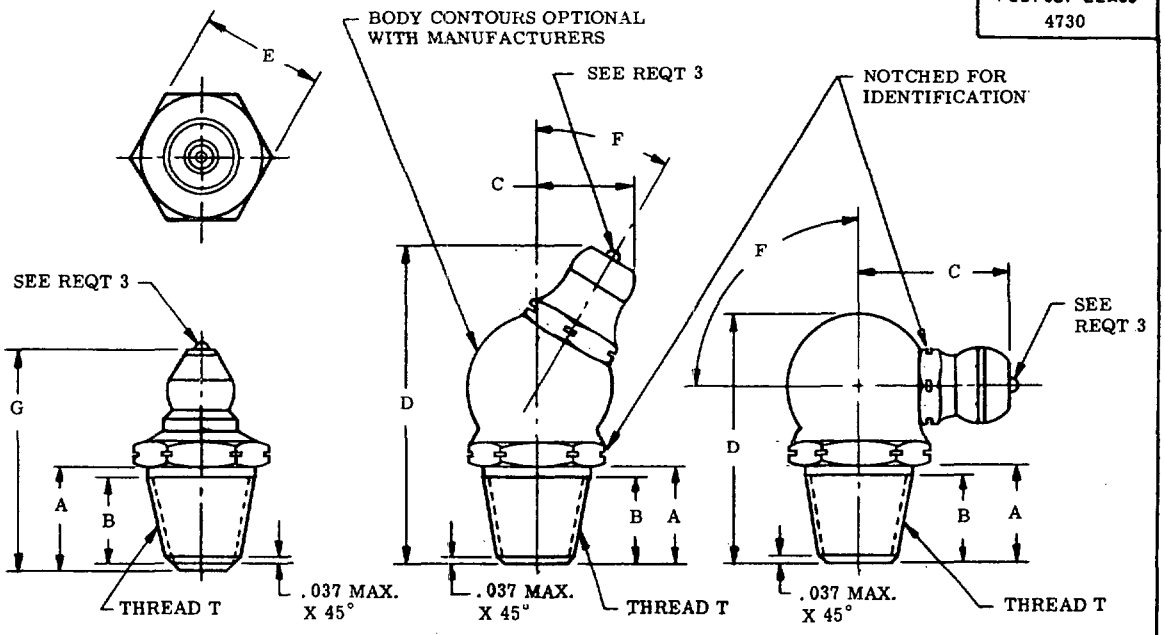


FIGURE 1 FIGURE 2 FIGURE 3

REQUIREMENTS:
1. MATERIAL: NICKEL-COPPER ALLOYS QQ-N-281, ~~AND QQ-N-286.~~ (E)
2. SEE TABLE:
   (a) PIPE THREAD SHALL BE MODIFIED (DRYSEAL) TAPER PIPE THREAD, NPTF, IN ACCORDANCE WITH FED-STD-H28/8, SCREW THREAD STANDARDS FOR FEDERAL SERVICES, EXCEPT THAT LENGTH OF EFFECTIVE THREAD L2 IS SHORTENED BY ONE THREAD ON SMALL END AND ONE THREAD ON LARGE END. SMALL END OF THREAD SHALL GAGE FROM FLUSH TO MINUS ONE AND ONE-HALF TURNS FROM SMALL END OF DRYSEAL (NPTF-L1) THIN RING GAGE. WIDTH OF FLAT ON THREAD CREST MAY BE .007 MAXIMUM.
   (b) EFFECTIVE THREADS.
3. SURFACE OR THROAT CHECK OPTIONAL.
4. ACCEPTABLE TIP DESIGN - IN ACCORDANCE WITH STANDARD MS15000.

MS PART NO.	FIG.	(a) THREAD T	A ±.031	(b) B MIN	C MAX	D MAX	E +.001 -.003	F	G ±.062
MS15005-1	1	1/8	.312	.188	--	--	.438	--	.750
MS15005-2					--	--		--	1.125
MS15005-3	2	1/8			.375	1.250		30°	--
MS15005-4					.625	1.094		65°	--
MS15005-5	3	1/8				1.063		90°	--
~~MS15005-6~~					~~.562~~	~~1.312~~		~~105°~~	

NOTES:
1. DIMENSIONS ARE IN INCHES.
2. UNLESS OTHERWISE SPECIFIED, TOLERANCE IS ±5°.
3. THESE FITTINGS, BECAUSE OF SHORTAGE OF THE CRITICAL MATERIAL INVOLVED, ARE TO BE USED ONLY WHEN IN DIRECT CONTACT WITH, OR SUBMERGED IN, SEA WATER.
4. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
5. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
6. SIZE -6 FITTINGS ARE INACTIVE FOR DESIGN. SIZE -5 MAY BE USED AS A REPLACEMENT.

(E) DENOTES CHANGES

APPROVED 12 JUN 51 REVISED (C) 10 DEC 76 (D) 3 MAR 77 (E) 12 FEB 82

P.A. NAVY - AS Other Cust ARMY - AR USAF - 11	TITLE: FITTINGS, LUBRICATION, THROAT OR SURFACE CHECK, 1/8 PIPE THREADS, NICKEL-COPPER ALLOY, TYPE V	MILITARY STANDARD MS15005
PROCUREMENT SPECIFICATION MIL-F-3541	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 4730-0404 PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:45Z
Check the source to verify that this is the current version before use.