FED. SUP CLASS
5310

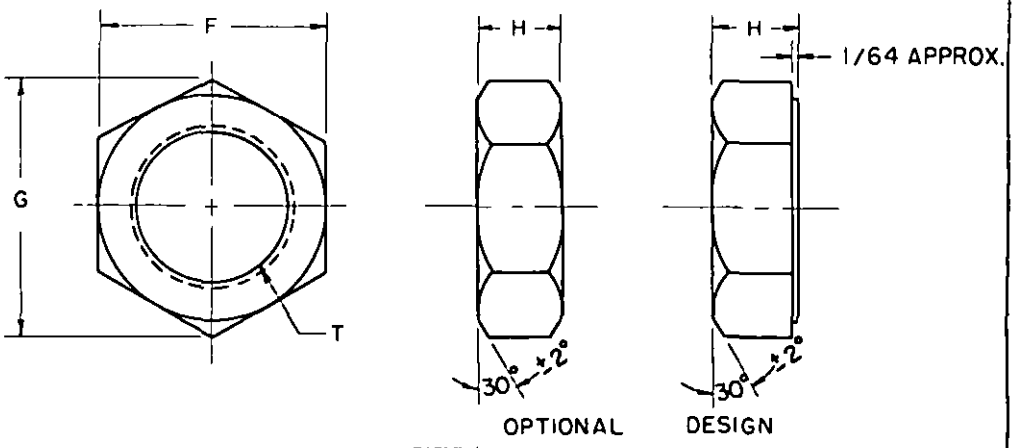


TABLE I

DASH NUMBER	NOM SIZE OR BASIC MAJOR DIA OF THREAD		T THREADS PER INCH LEFT HAND	F WIDTH ACROSS FLATS NOM	F MAX	F MIN	G WIDTH ACROSS CORNERS MAX	G MIN	H THICKNESS NOM	H MAX	H MIN
1	1/4	0.2500	20UNC-2B	7/16	0.4375	0.428	0.505	0.488	5/32	0.163	0.150
30	1/4	0.2500	28UNF-2B	7/16	0.4375	0.428		0.488	5/32	0.163	0.150
3	5/16	0.3125	18UNC-2B	1/2	0.5000	0.489	0.577	0.557	3/16	0.195	0.180
31	5/16	0.3125	24UNF-2B	1/2	0.5000	0.489		0.557	3/16	0.195	0.180
5	3/8	0.3750	16UNC-2B	9/16	0.5625	0.551	0.650	0.628	7/32	0.227	0.210
32	3/8	0.3750	24UNF-2B	9/16	0.5625	0.551		0.628	7/32	0.227	0.210
33	7/16	0.4375	20UNF-2B	11/16	0.6875	0.675	0.794	0.768	1/4	0.260	0.240
7	1/2	0.5000	13UNC-2B	3/4	0.7500	0.736	0.866	0.840	5/16	0.323	0.302
34	1/2	0.5000	20UNF-2B	3/4	0.7500	0.736		0.840	5/16	0.323	0.302
9	5/8	0.6250	11UNC-2B	15/16	0.9375	0.922	1.083	1.051	3/8	0.387	0.363
35	5/8	0.6250	18UNF-2B	15/16	0.9375	0.922		1.051	3/8	0.387	0.363
11	3/4	0.7500	10UNC-2B	1 1/8	1.1250	1.088	1.299	1.240	27/64	0.446	0.398
13	7/8	0.8750	9UNC-2B	1 5/16	1.3125	1.269	1.516	1.447	31/64	0.510	0.458
15	1	1.0000	8UNC-2B	1 1/2	1.5000	1.450	1.732	1.653	35/64	0.575	0.519
36	1	1.0000	12UNF-2B	1 1/2	1.5000	1.450		1.653	35/64	0.575	0.519
17	1 1/8	1.1250	7UNC-2B	1 11/16	1.6875	1.631	1.949	1.859	39/64	0.639	0.579
19	1 1/4	1.2500	7UNC-2B	1 7/8	1.8750	1.812	2.165	2.066	23/32	0.751	0.687
37	1 1/4	1.2500	12UNF-2B	1 7/8	1.8750	1.812		2.066	23/32	0.751	0.687
21	1 1/2	1.5000	6UNC-2B	2 1/4	2.2500	2.175	2.598	2.480	27/32	0.880	0.808
23	1 3/4	1.7500	5UNC-2B	2 5/8	2.6250	2.538	3.031	2.893	31/32	1.009	0.929
25	2	2.000	4 1/2 UNC-2B	3	3.0000	2.900	3.464	3.306	1 3/32	1.138	1.050
27	2 1/2	2.5000	4UNC-2B	3 3/4	3.7500	3.625	4.330	4.133	1 29/64	1.505	1.401

NOTES:

1. MATERIAL: Steel, no.'s 1016 to 1020 in accordance with Federal Standard No. 66.
2. PROTECTIVE COATING: Zinc-coated (hot dip galvanize) in accordance with ASTM A153. Surface treatment in accordance with MIL-T-12879, Type II.
3. THREADS: The threads shall be left hand in accordance with Screw-Thread Standards for Federal Services, Handbook H-28.
4. DIMENSIONS: Unless otherwise specified, all dimensions are in inches.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number. Example: MS27952-1
6. Referenced documents shall be of the issue in effect on date of invitations for bid.
7. For design feature purposes, this standard takes precedence over procurement documents referenced herein.

(A) ENTIRE STANDARD REVISED

APPROVED 9 FEB 61 REVISED (A) 22 APR 1968

REVIEWER:AT, 85, NSA, IS
USER:ME, AV, GL, OS, MC

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust SH 82	TITLE NUT, PLAIN-HEXAGON, JAM, LEFT HAND	MILITARY STANDARD MS 27952
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: BUNX5 in part and BUNX6 in part	SHEET 1 OF 2

DD FORM 1 SEP 61 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.

REVIEWER: AT, ES, NSA, 1S
USER: ME, AV, GL, OS, MC

INTERCHANGEABILITY TABLE

Dash numbers for the following Bearing Surface type of jam nut, as given in the original issue of this standard, are cancelled after 2 2 APR 1968 . The cancelled nuts should be used until existing stock is depleted. Use only the superseding nuts for design and replacement.

TABLE II

PART NUMBER	
CANCELLED	SUPERSEDED BY
DASH NUMBER	DASH NUMBER
2	1
4	3
6	5
8	7
10	9
12	11
14	13
16	15
18	17
20	19
22	21
24	23
26	25
28	27

APPROVED 9 FEB 61 REVISED (A) ENTIRE STANDARD REVISED

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MC Other Cust SH 82	TITLE NUT, PLAIN-HEXAGON, JAM, LEFT HAND	MILITARY STANDARD MS 27952
PROCUREMENT SPECIFICATION FF-N-836	SUPERSEDES: BUNX5 in part and BUNX6 in part	SHEET 2 OF

DD FORM 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.