
FED. SUP CLASS
5340

CANCELLED
SEE
BELOW

FAST AND LOOSE PIN

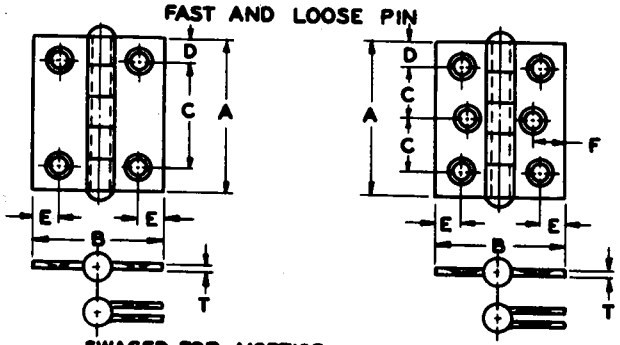

SWAGED, FOR MORTISE APPLICATION

NOMINAL SIZE							
A	LENGTH	+0, -1/64	1-1/2	1-1/2	2	2	2-1/2
B	WIDTH	±1/64	1-1/4	2	2	2-1/2	2
C		±.005	1.0	1.0	1.375	1.375	.938
D		±.005	.250	.250	.312	.312	.312
E		±.005	.171	.312	.312	.312	.320
F		±.005					.320
T	THICKNESS	± 005	.074	.074	.082	.082	.089
NUMBER OF SCREW HOLES			4	4	4	4	6
*SIZE OF SCREWS		MIN	#6-32x1/2	#6-32x1/2	#8-32x1/2	#8-32x1/2	#8-32x1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, SWAGED			6	8	
LOOSE PIN, SWAGED	22	24	26	28	30

NOMINAL SIZE							
A	LENGTH	+0, -1/64	3	3	3	3	3-1/2
B	WIDTH	±1/64	2	2-1/2	3	4	3
C		±.005	1.188	1.188	1.188	1.188	1.395
D		±.005	.312	.312	.312	.312	.355
E		±.005	.312	.312	.312	.312	.360
F		±.005	.312	.580	.580	.580	.687
T	THICKNESS	±.005	.092	.092	.092	.092	.123
NUMBER OF SCREW HOLES			6	6	6	6	6
*SIZE OF SCREWS		MIN	#10-24x1/2	#10-24x1/2	#10-24x1/2	#10-24x1/2	#10-24x1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, SWAGED	12	14		18	20
LOOSE PIN, SWAGED	32	34	36	38	40

MATERIAL: BODY: WROUGHT ALUMINUM, IN ACCORDANCE WITH SPECIFICATION QQ-A-327 (61s).
PIN, WAFER, AND BUSHING: STEEL, CORROSION RESISTING, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, STEEL NUMBER: 303.

PROTECTIVE COATING: SATIN FINISHED AND ANODIZED IN ACCORDANCE WITH SPECIFICATION MIL-A-8625.

*SCREWS: HINGES ARE FURNISHED WITH MACHINE SCREWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

WAFERS AND BUSHINGS: FAST PIN HINGES BELOW THE 3" SIZE SHALL HAVE CORROSION RESISTING STEEL WAFERS FITTED BETWEEN THE KNUCKLES. HINGES 3" AND UP SHALL BE FITTED WITH A CORROSION RESISTING STEEL BUSHING EXTENDING THE ENTIRE LENGTH OF EACH KNUCKLES.

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS 27957-12.

NOTES: (1) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(2) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

Ⓐ CANCELLED AFTER 30 OCT 1975
FOR INTERCHANGEABLE PARTS USE CLASS 2, TYPE I AND II OF MIL-H-1237

APPROVED 24 FEB 61 REVISED Ⓐ 30 OCT 1976

P.A. WC Other Cust DOCKS WADC	TITLE HINGE, BUTT-NARROW AND BROAD, TEMPLATE, HARDWARE, BUILDER'S, COMMERCIAL, ALUMINUM	MILITARY STANDARD MS 27957
PROCUREMENT SPECIFICATION MIL-H-1237	SUPERSEDES:	SHEET 1 OF 1

NOTICE—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

DD FORM SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. ☆ U. S. GOVERNMENT PRINTING OFFICE: 1975-603-766/1504

Source: https://assist.dla.mil -- Downloaded: 20260-23T16:53Z
Check the source to verify that this is the current version before use.