INCH-POUND
MIL-DTL-16377/39B(SH)
26 May 2023
SUPERSEDING
MIL-F-16377/39A(SHIPS)
4 January 1974

DETAIL SPECIFICATION SHEET

FIXTURES, LIGHTING; STREAMER TYPE, DETAIL LIGHTING FOR TOPSIDE DRESS LIGHTING, WATERTIGHT, 120 VOLTS, SYMBOL 307

This specification is approved for use by the Naval Sea Systems Command and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-16377.

Unless otherwise noted, all dimensions are in inches. For tolerances other than those specified herein, see 3.5.2 of MIL-DTL-16377.

Figures 1 through 7 provide information for the light fixtures covered by this specification sheet. See the requirements sections for specific references to these figures.

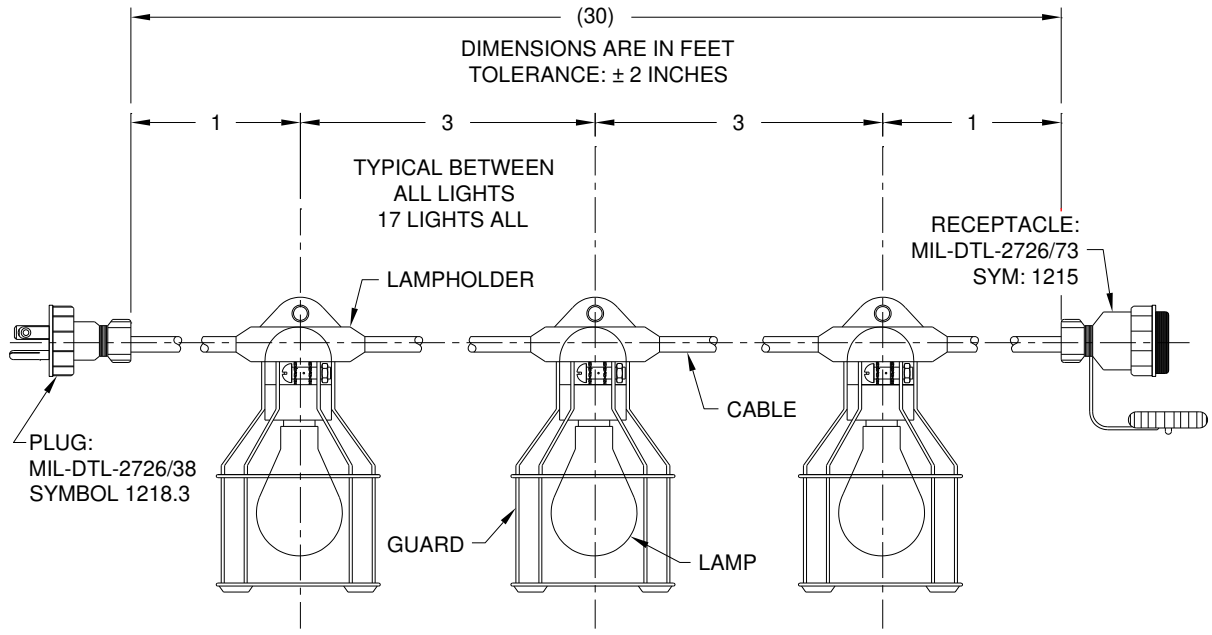


FIGURE 1. Light streamer assembly.

Distribution Statement A. Approved for public release: distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

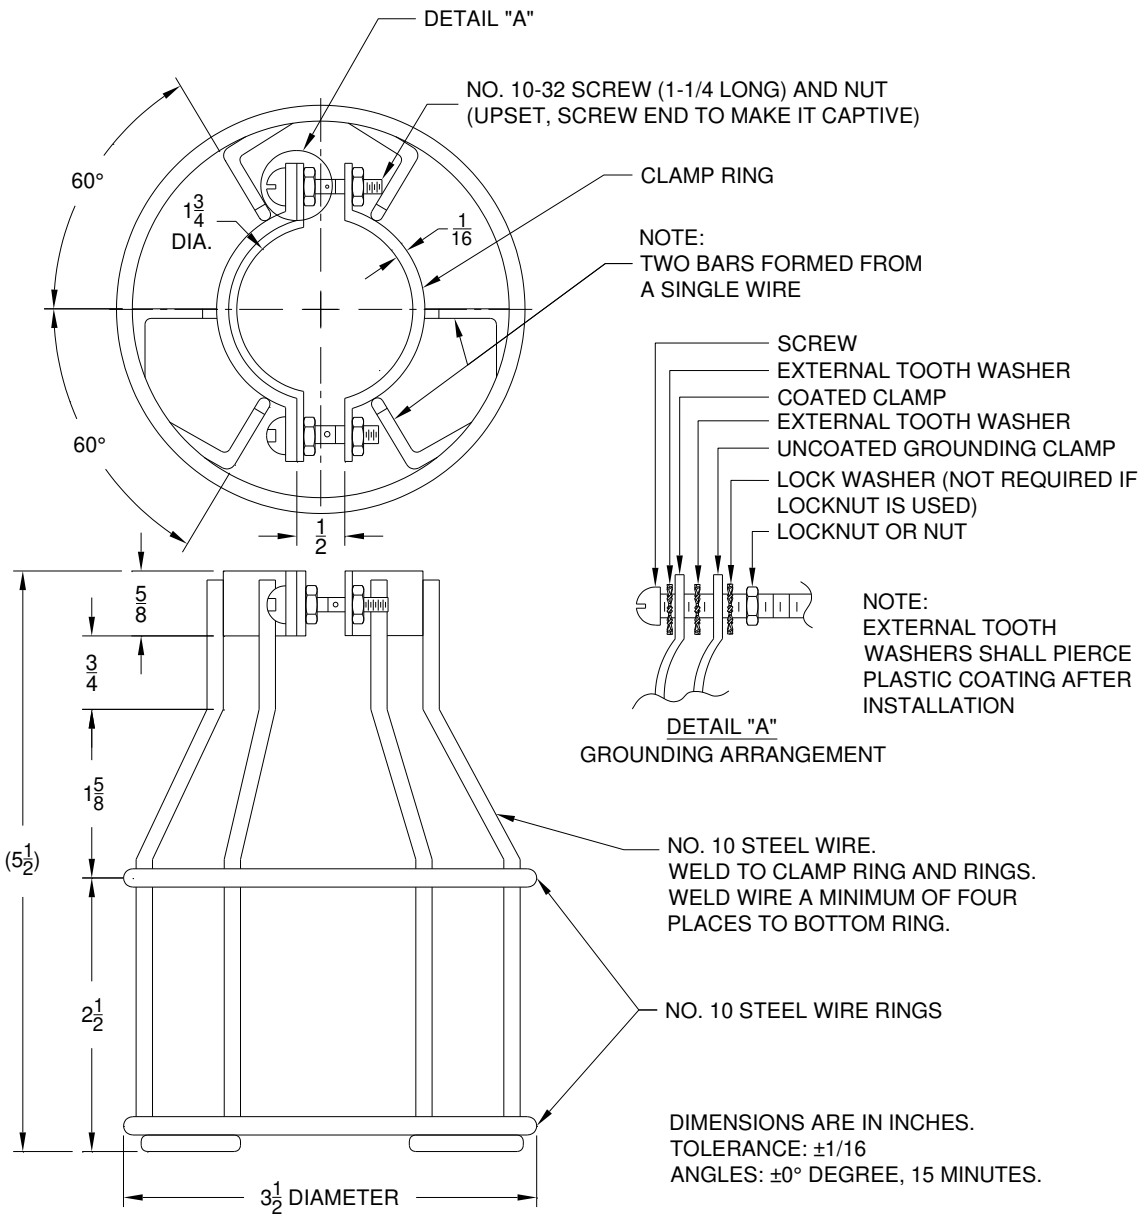


FIGURE 2. Guard assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.


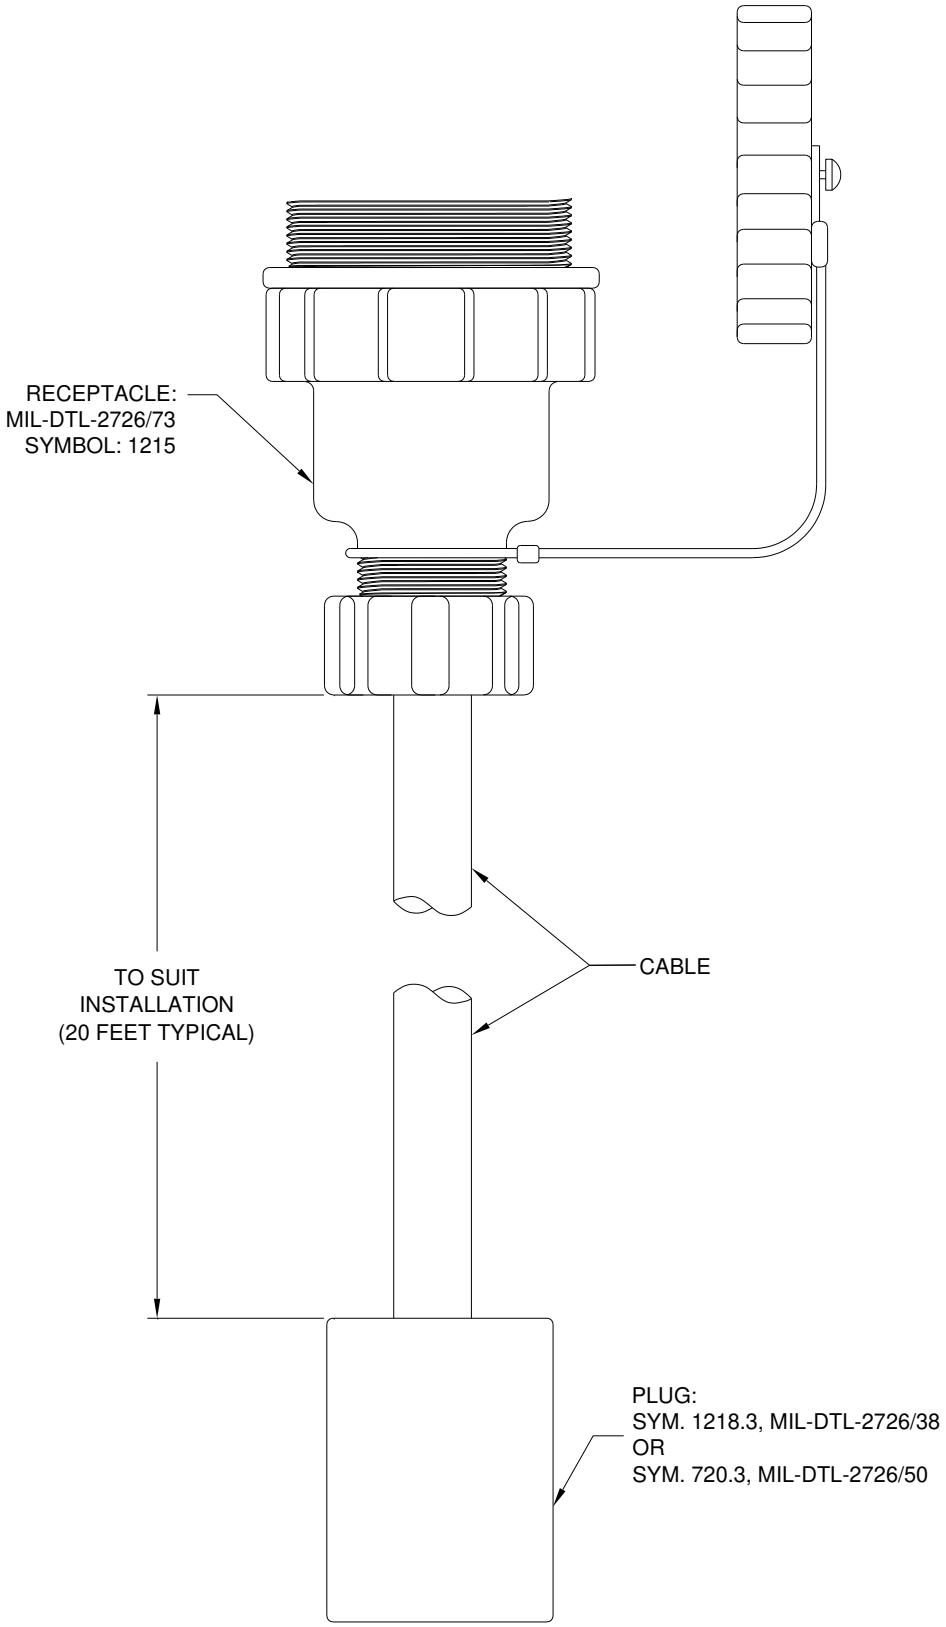


FIGURE 3. Extension cable assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

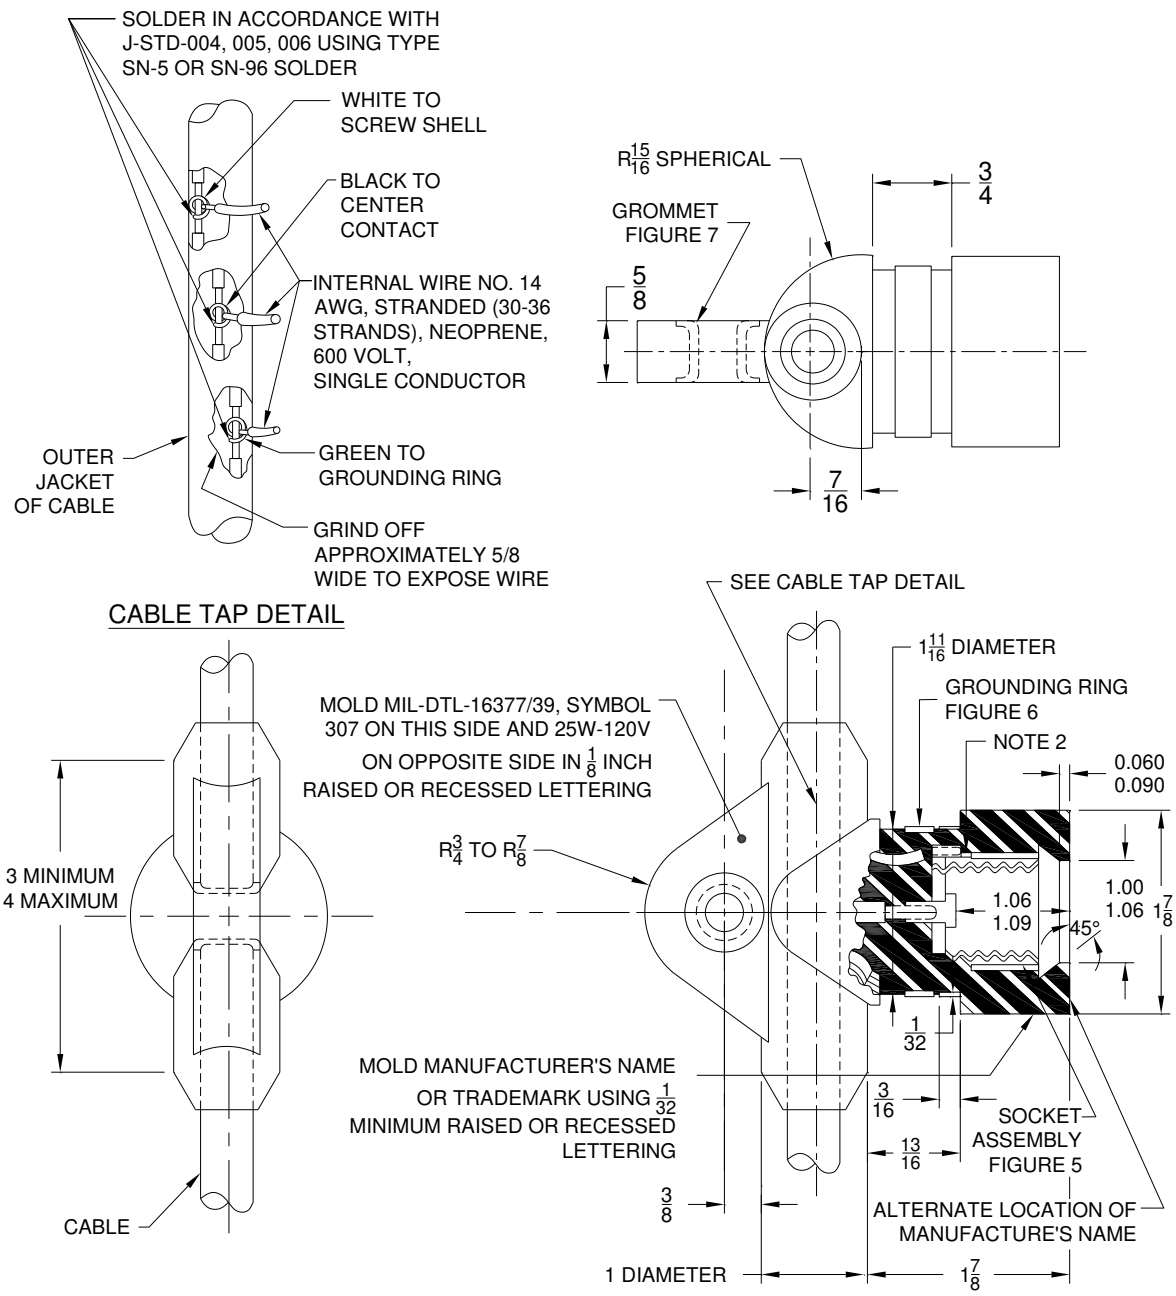


NOTES:

1. Molding material for lampholders shall be neoprene (durometer hardness 55-65, shore A) of a type compatible with the cable sheath.
2. At the option of the manufacturer, the connection between screw and shell and internal wire may be made with a crimp lug or by direct soldering per J-STD-004, J-STD-005, and J-STD-006, using type SN-5 or SN-96 solder.
3. Unless otherwise indicated, dimensional tolerances shall comply with Rubber Manufacturers Association (RMA), class 3.
4. Crimped wire connections shall satisfy a 30-pound pull test before mold.

FIGURE 4. Lampholder assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

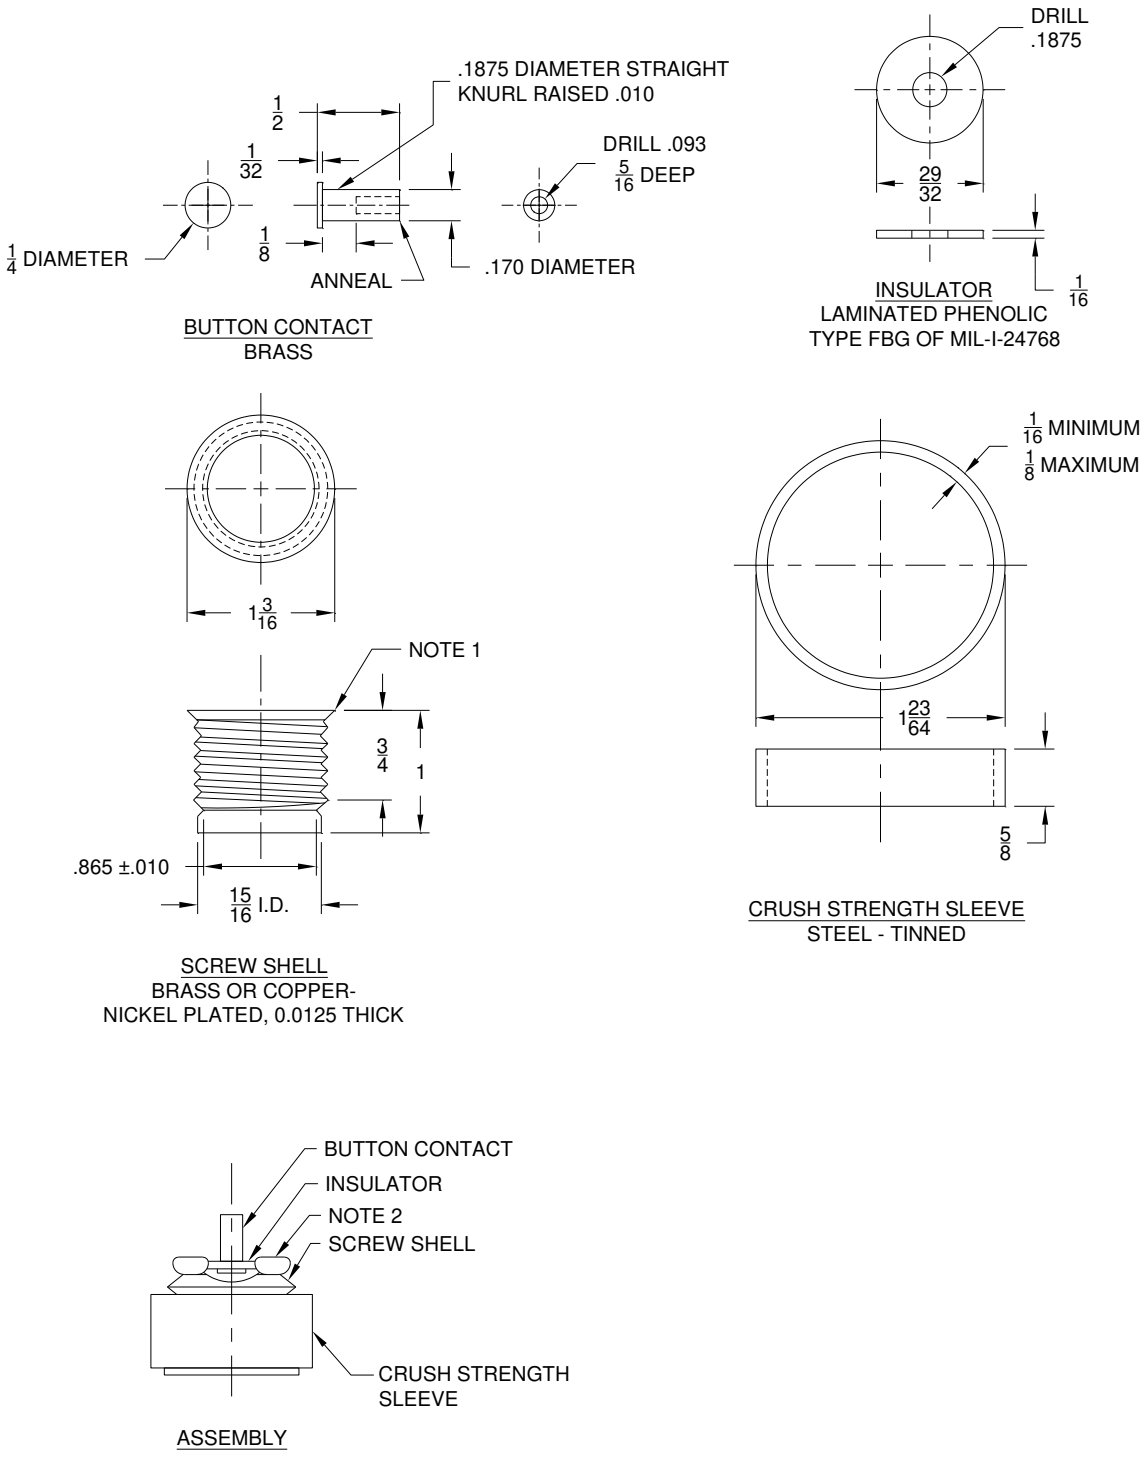

NOTES:

1. Screw shell shall be made for ASME standard medium screw lamp base, right hand.
2. Screw shell shall be firmly crimped over insulator.
3. Composition of brass shall be such that it is resistant to corrosion cracking.

FIGURE 5. Socket assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

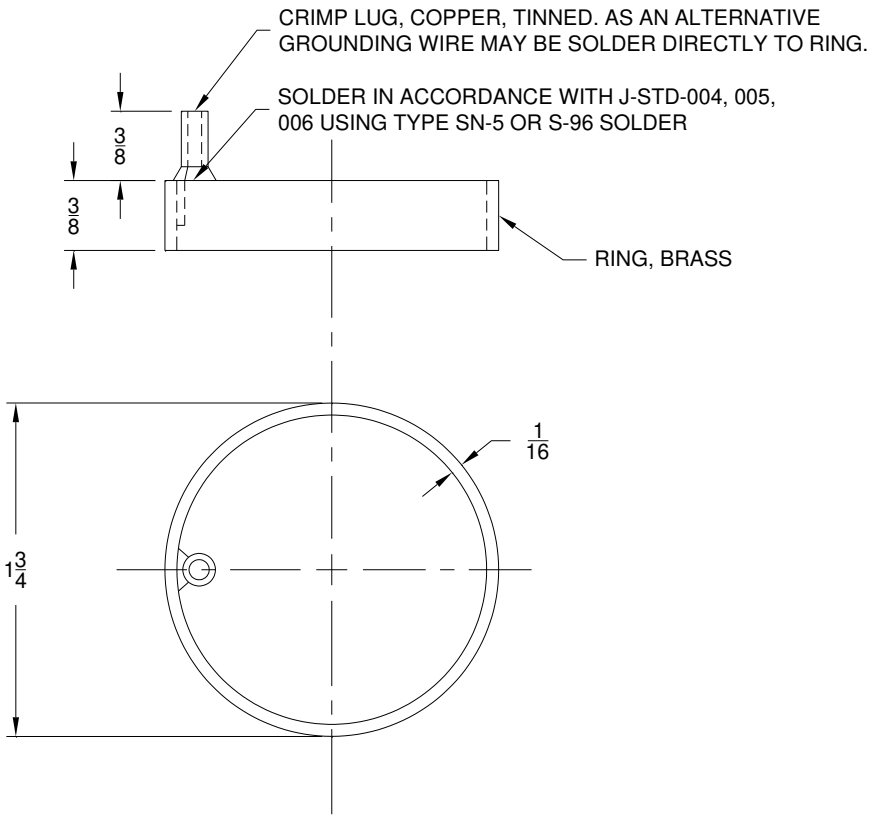


FIGURE 6. Grounding ring assembly.

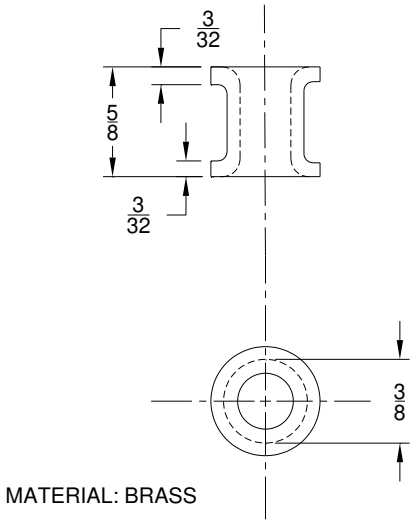


FIGURE 7. Grommet.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

CLASSIFICATION

Type: II or III
Class: 1

SYMBOL NUMBER

307: Streamer light for topside ship dress lighting, 120 volts.

DESIGN

Electrical rating:	120 volts.
Dimensions and configuration:	See figures 1 through 7.
Lampholder:	Lampholder shall conform to figure 4. Quantity and spacing of lampholders shall be as shown on figure 1.
Cable:	Cable shall be type SOOW, AWG size 14, three-conductor (white, black, and green) in accordance with UL 62 with ethylene propylene diene monomer insulation.
Electrical connections:	Electrical plugs and receptacles shall be as shown on figures 1 and 3.
Guard:	Guards shall be fabricated from corrosion-resistant materials as shown on figure 2. The guard (excluding the screws, nuts, washers, and the grounding clamp) shall be plastic-coated. Coating material shall be vinyl plastisol or equal. Color shall be blue. Plastic guards molded of ultraviolet stabilized polycarbonate clear material to the dimensions shown on figure 2, with a snap-on feature that fits tightly over the lampholder neck, may be used as an alternate design.
Lamp:	Streamer, symbol 307, shall be designed to accommodate 17 lamps, incandescent, rough-service, medium-screw, plastic-coated, 25-watt, 120-volt, industry number 25A/RS(120), National Stock Number (NSN) 6240-00-106-9636. LED lamps shall be a minimum of 200 lumens per lamp, maximum power of 25 watts, and A19 equivalent. (Lamp not furnished.)
Weight:	Symbol 307, complete: 32 pounds maximum.
Streamer assembly:	Streamer assemblies shall be furnished as shown on figure 1.
Extension cable assembly:	Unless otherwise specified, extension cable assemblies for energizing the streamers shall not be furnished (see general information).

EXAMINATIONS AND TESTS

Examinations and tests shall be as specified in MIL-DTL-16377 and as follows:

First article inspection:	
Complete fixtures:	See table I.
Conformance inspection:	
Comparison inspection:	Same as the first article inspection.
Conformance inspection:	See MIL-DTL-16377.

GENERAL INFORMATION

(a) Extension cable assemblies will be furnished by the installing activity as shown on figure 3 to suit installation.

(b) Assignment of military part numbers and general information is shown in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

TABLE I. First article and comparison inspection.

Tests	Requirement Paragraph of MIL-DTL-16377	Test Paragraph of MIL-DTL-16377	Remarks
Examination	3.12	4.5	---
Operation	3.12	4.8.1	---
Dielectric withstanding voltage	3.6.15	4.8.2	---
Insulation resistance	3.6.16	4.8.3	---
Enclosure effectiveness	3.5.11.3	4.8.14.4	Watertight
Dielectric withstanding voltage	3.6.15	4.8.2	---
Insulation resistance	3.6.16	4.8.3	---
Salt fog	3.3.15	4.8.10	---
Grounding circuit	3.6.13.3	4.8.11	1/
Continuity of grounding	3.6.13.4	4.8.12	---

NOTE:

1/ Grounding circuit is defined as the circuit between the grounding contact in the plug or receptacle and the grounding ring of the first lampholder adjacent to it and between the grounding rings of successive lampholders.

TABLE II. Part numbers and general information.

Military Part Number M16377/39-	Item Name	National Stock Number (NSN)
307	Complete streamer assembly	---
001	Streamer assembly without guard assemblies	6230-00-160-0610
002	Guard assembly	6230-00-159-2231
003	Extension cable assembly	---

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

CONCLUDING MATERIAL

Preparing activity:
Navy – SH
(Project 6230-2023-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.