This document has been approved for public release and sale; its distribution is unlimited.

MIL-F-16377/35(SHIPS)
30 November 1970
SUPERSEDING
MS17275(SHIPS)
9 June 1961

MILITARY SPECIFICATION SHEET

FIXTURES, LIGHT, INCANDESCENT, DETAIL LIGHTING FOR SMALL BOATS, 3 CANDLEPOWER, 12 TO 16 OR 24 TO 28 VOLTS, SPLASHPROOF, SYMBOL 310

The complete requirements for procuring the light described herein shall consist of this document and the latest issue of MIL-F-16377(SHIPS).

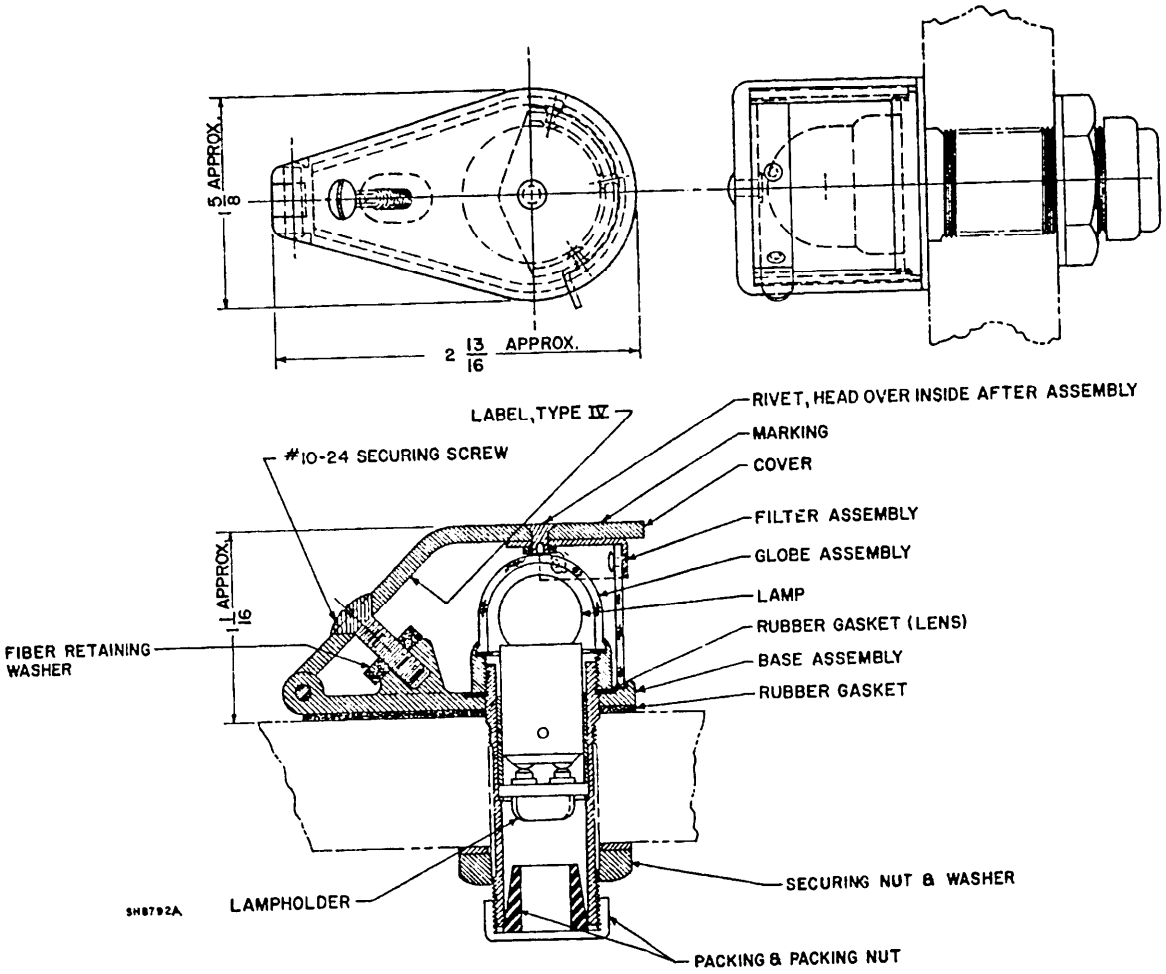


Figure 1 - Light, incandescent, detail lighting, Symbol 310.

All dimensions in inches.
For tolerances other than specified herein, see paragraph 3.5.2 of MIL-F-16377.

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

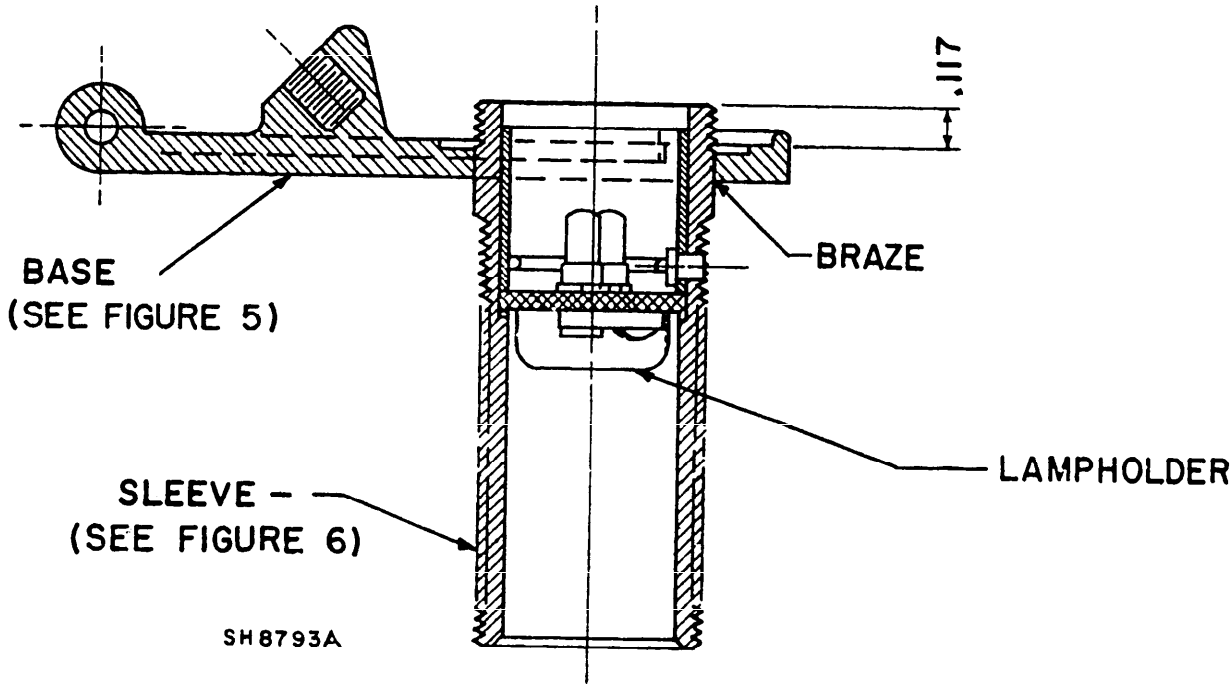


Figure 2 - Base assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

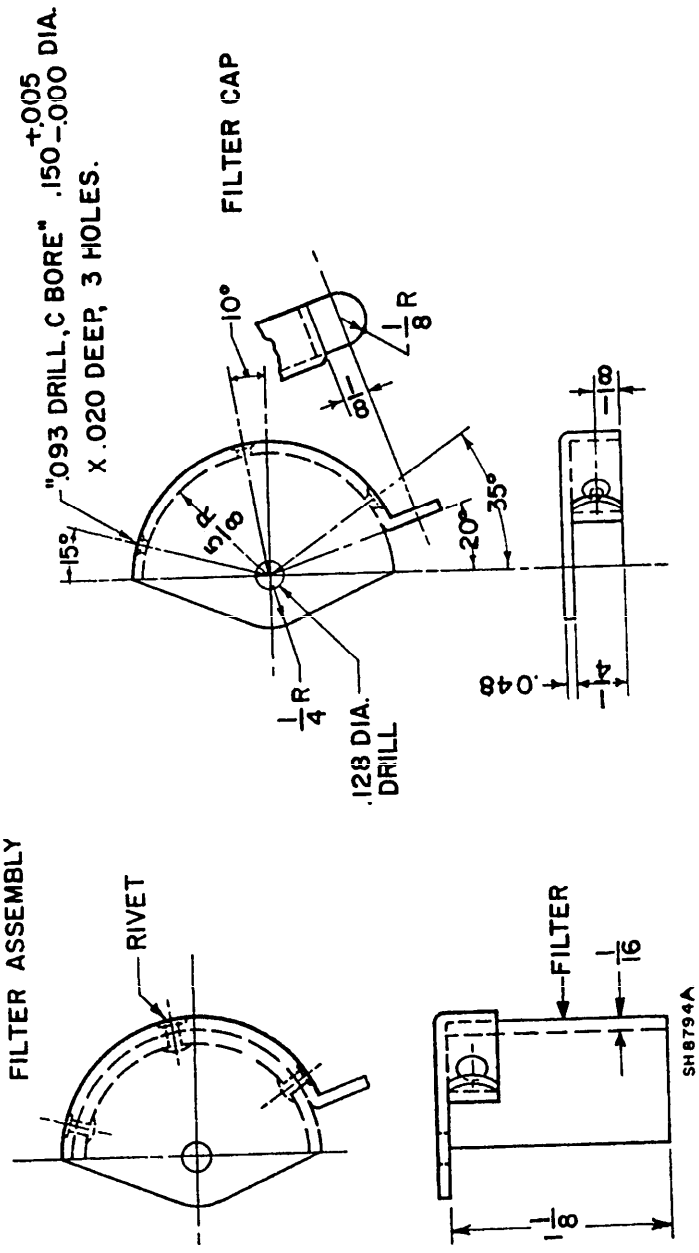


Figure 3 - Filter assembly.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

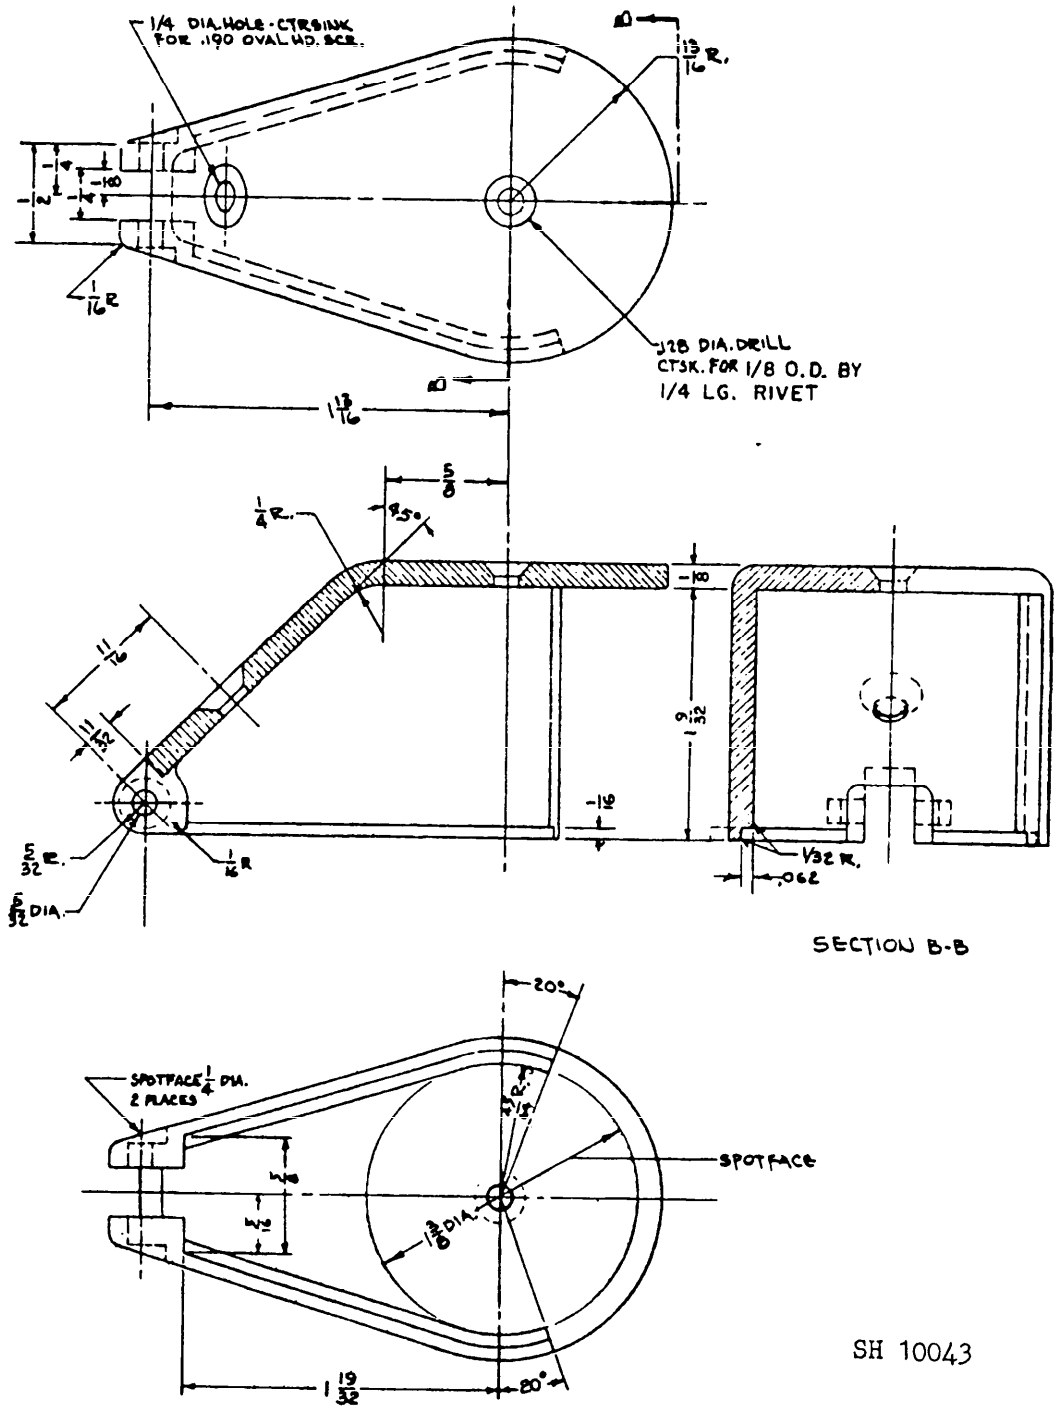


Figure 4 - Cover.

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:47Z
Check the source to verify that this is the current version before use.


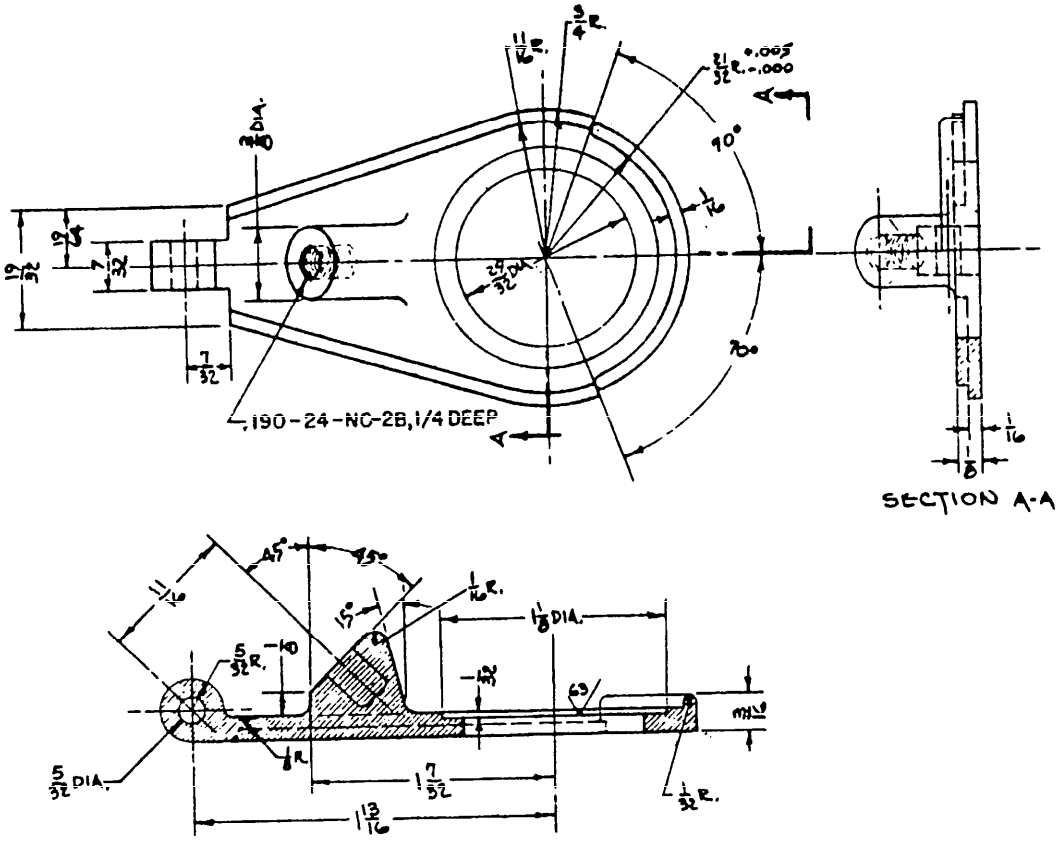


Figure 5 - Base

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:47Z
Check the source to verify that this is the current version before use.

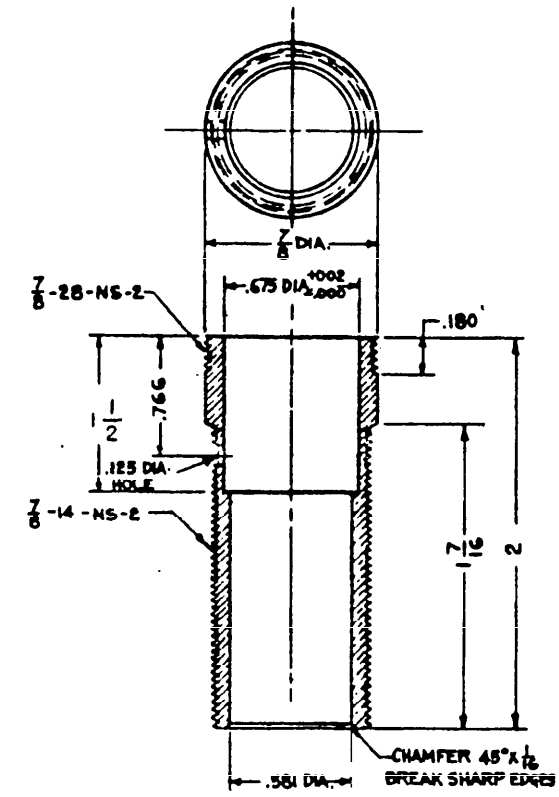

SH 10045

Figure 6 - Sleeve.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.

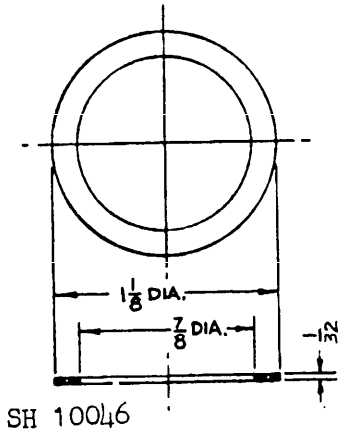


Figure 7 - Gasket (lens).

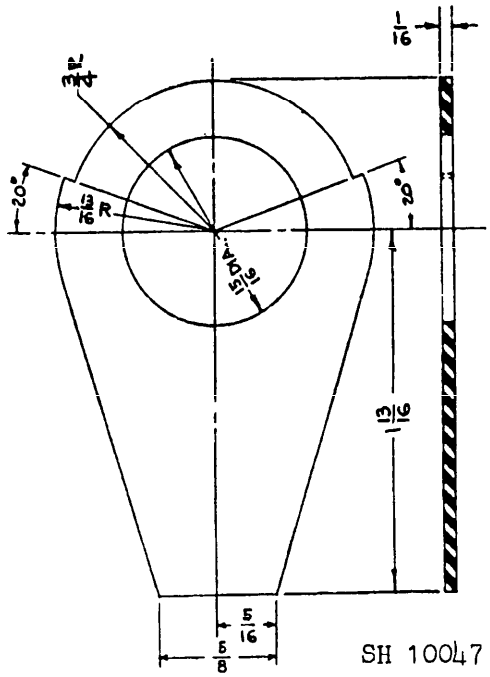


Figure 8 - Gasket.

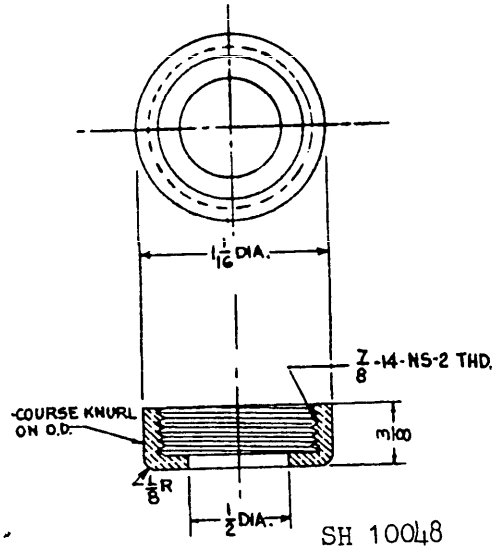


Figure 9 - Packing nut.

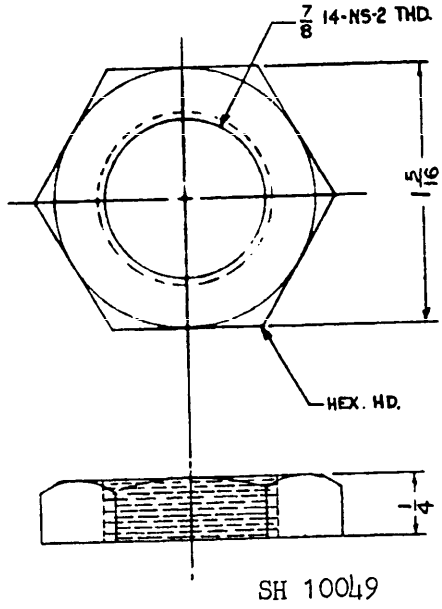


Figure 10 - Securing nut

Source: https://assist.dla.mil -- Downloaded: 202610-18T08:47Z
Check the source to verify that this is the currentversion before use.

REQUIREMENTS:
Type: II
Class: 1
Symbol 310: Light for use with a 3 candlepower incandescent lamp, 12 to 16 volts, or 24 to 28 volt system.
Design:
Electrical rating: 12 to 16 volts or 24 to 28 volts, 3 candlepower.
Dimensions and configuration: See figures 1 through 10.
Material: All metals shall be brass or bronze.
Globe assembly: Clear (colorless) transparent, type LC40CN3 of MIL-L-3661/54.
Window (filter): See figure 3. Material shall be red transparent, heat-resistant acrylic plastic type RTPS-1 of MIL-P-24191.
Lampholder: MIL-L-970/2 (two contact).
Packing, cable: Pyle-National Company No. D-B-4E, or equal.
Lamp: This light shall be designed to accommodate 3-candlepower lamps, MS15613-1, Industry Number 78 or MS15613-2, Industry Number 302. Lamp is not furnished.
Weight: 1 pound max.
Label: Labels shall be furnished in accordance with MIL-F-16377. One type IV label shall be applied as shown on figure 1. The information to be shown on the type IV label shall be:

"INSTALL THE FOLLOWING 3-CANDLEPOWER LAMPS ONLY:

12-16 VOLT SYSTEM: FSN6240-155-7957
24-28 VOLT SYSTEM: FSN6240-155-7926"

Marking: The following legend shall be stamped or engraved on the light where indicated on figure 1:

"MIL-F-16377/35(REV___)
SYMBOL 310
FSN6210-399-6339
MANUFACTURER'S NAME"
(Insert revision letter of document)

QUALITY ASSURANCE: Quality assurance shall be as specified in MIL-F-16377 and as follows:

First article inspection:	See table I
Quality conformance:	
Comparison inspection:	Same as the first article inspection
Inspection of product for delivery:	
Examination:	See MIL-F-16377
Examination for preparation of delivery:	See MIL-F-16377
Quality conformance tests:	See MIL-F-16377

Table I - First article and comparison inspection.

Tests	Requirement paragraph	Test paragraph	Remarks
Examination	3.13	4.5	
Operation	3.13	4.8.1	
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Enclosure effectiveness	3.5.11	4.8.14.3	Splashproof
Vibration	3.5.13	4.8.8	
Enclosure effectiveness	3.5.11	4.8.14.3	Splashproof
Dielectric withstanding voltage	3.6.15	4.8.2	
Insulation resistance	3.6.16	4.8.3	
Optical uniformity	3.7.4.1.1	4.8.4	
Magnetic permeability	3.4.8	4.8.18	

General information: Assignment of Military part numbers and general information is as follows:

Military part number: M16377/35-310.
Federal stock number: 6210-399-6339.

Preparing activity:
Navy - SH
(Project 6210-N391)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T08:47Z
Check the source to verify that this is the current version before use.