
PROJECT NO. 5310-0724

FED. SUP CLASS 5310

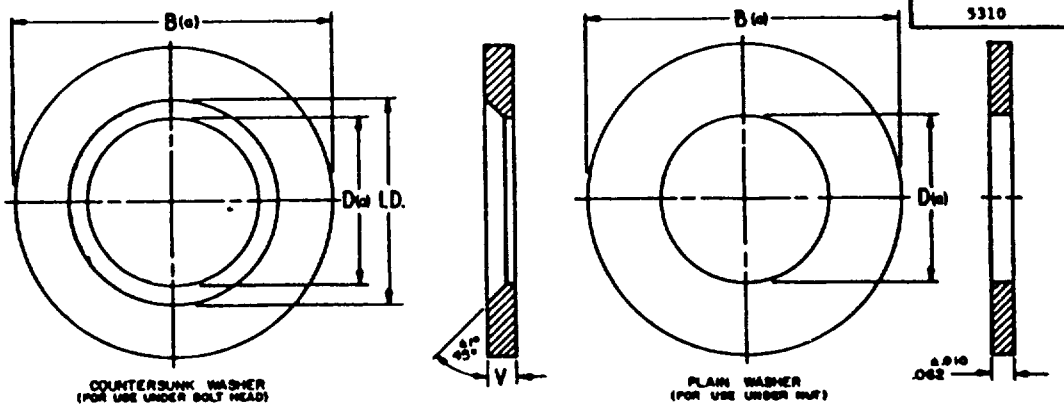

NOMINAL SIZE	BASH NUMBER		B(a)		D(a)		I.D.		V		FLATNESS MAX	APPROX WEIGHT LB/100
	CSK	PLAIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	MIN		
#10	C3	3	.387	.377	.195	.191	.290	.280	.069	.057	.007	.15
1/4	C4	4	.491	.481	.255	.251	.350	.340				.24
5/16	C5	5	.598	.588	.318	.314	.412	.402				.35
3/8	C6	6	.712	.702	.380	.376	.507	.497	.085	.071		.49
7/16	C7	7	.831	.821	.443	.439	.569	.559				.67
1/2	C8	8	.950	.940	.505	.501	.632	.622				.89
9/16	C9	9	1.069	1.059	.568	.564	.694	.684			.010	1.12
5/8	C10	10	1.192	1.182	.631	.627	.788	.778				1.40
3/4	C12	12	1.433	1.423	.756	.752	.913	.903				2.03
7/8	C14	14	1.668	1.658	.881	.877	1.038	1.028				2.75
1	C16	16	1.905	1.895	1.006	1.002	1.163	1.153	.119	.099		3.59
1 1/8	C18	18	2.150	2.140	1.131	1.127	1.288	1.278				4.48
1 1/4	C20	20	2.391	2.381	1.256	1.252	1.445	1.435				5.64
1 3/8	C22	22	2.637	2.627	1.381	1.377	1.570	1.560			.015	6.99
1 1/2	C24	24	2.884	2.874	1.506	1.502	1.695	1.685				8.31

(a) MINIMUM BEARING AREA BASED ON A BEARING STRESS OF 90 KSI AT THE ULTIMATE TENSILE VALUE OF 260 KSI BOLT, OR THE FLANGE DIAMETER OF MS21085 NUTS WHICHEVER IS GREATER.

MATERIAL: ALLOY STEEL, MIL-S-6758, MIL-S-18729.

HARDNESS: ROCKWELL C 39-45.

SURFACE TEXTURE: 125/IN ACCORDANCE WITH ASA B46.1-1962(ANSI).

PLATING: CADMIUM PLATE, QQ-P-416, TYPE II, CLASS 2.

PARALLELISM: WASHER FACES SHALL BE PARALLEL WITHIN .002 INCH.

WASHER SHALL BE FREE FROM ALL HANGING BURRS AND SLIVERS WHICH MIGHT BECOME DISLODGED UNDER USAGE.

DIMENSIONS IN INCHES.

DESIGN AND USAGE INFORMATION: THESE WASHERS ARE PRIMARILY FOR USE WITH MS21085 NUTS AND MS21298 BOLTS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED THEREIN. REFERENCE SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

EXAMPLE OF PART NUMBER: MS21299-3 WASHER, PLAIN, FOR NO. 10 SIZE, 260 KSI BOLT.
MS21299-C3 WASHER, COUNTERSUNK, FOR NO. 10 SIZE, 260 KSI BOLT.

APPROVED 28 JAN 1972 REVISED

P.A. NAVY - AS
Other Coat
USAF-11
ARMY-AV

TITLE
WASHER, COUNTERSUNK AND PLAIN, FOR USE WITH BOLTS AND NUTS UP TO AND INCLUDING 260KSI FTU

MILITARY STANDARD
MS21299

PROCUREMENT SPECIFICATION

SUPERSEDES

SHEET 1 OF 1

DD FORM 672-1 (Coordinated)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

PLATE NO. 11700

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.