FED. SUP CLASS.
5910

SUPERSEDED
AFTER 24 SEP 65
USE MIL-STD-198
SECTION 400 FOR
SELECTION OF STANDARD
ITEMS. USE MIL-C-20/19
FOR PROCUREMENT.

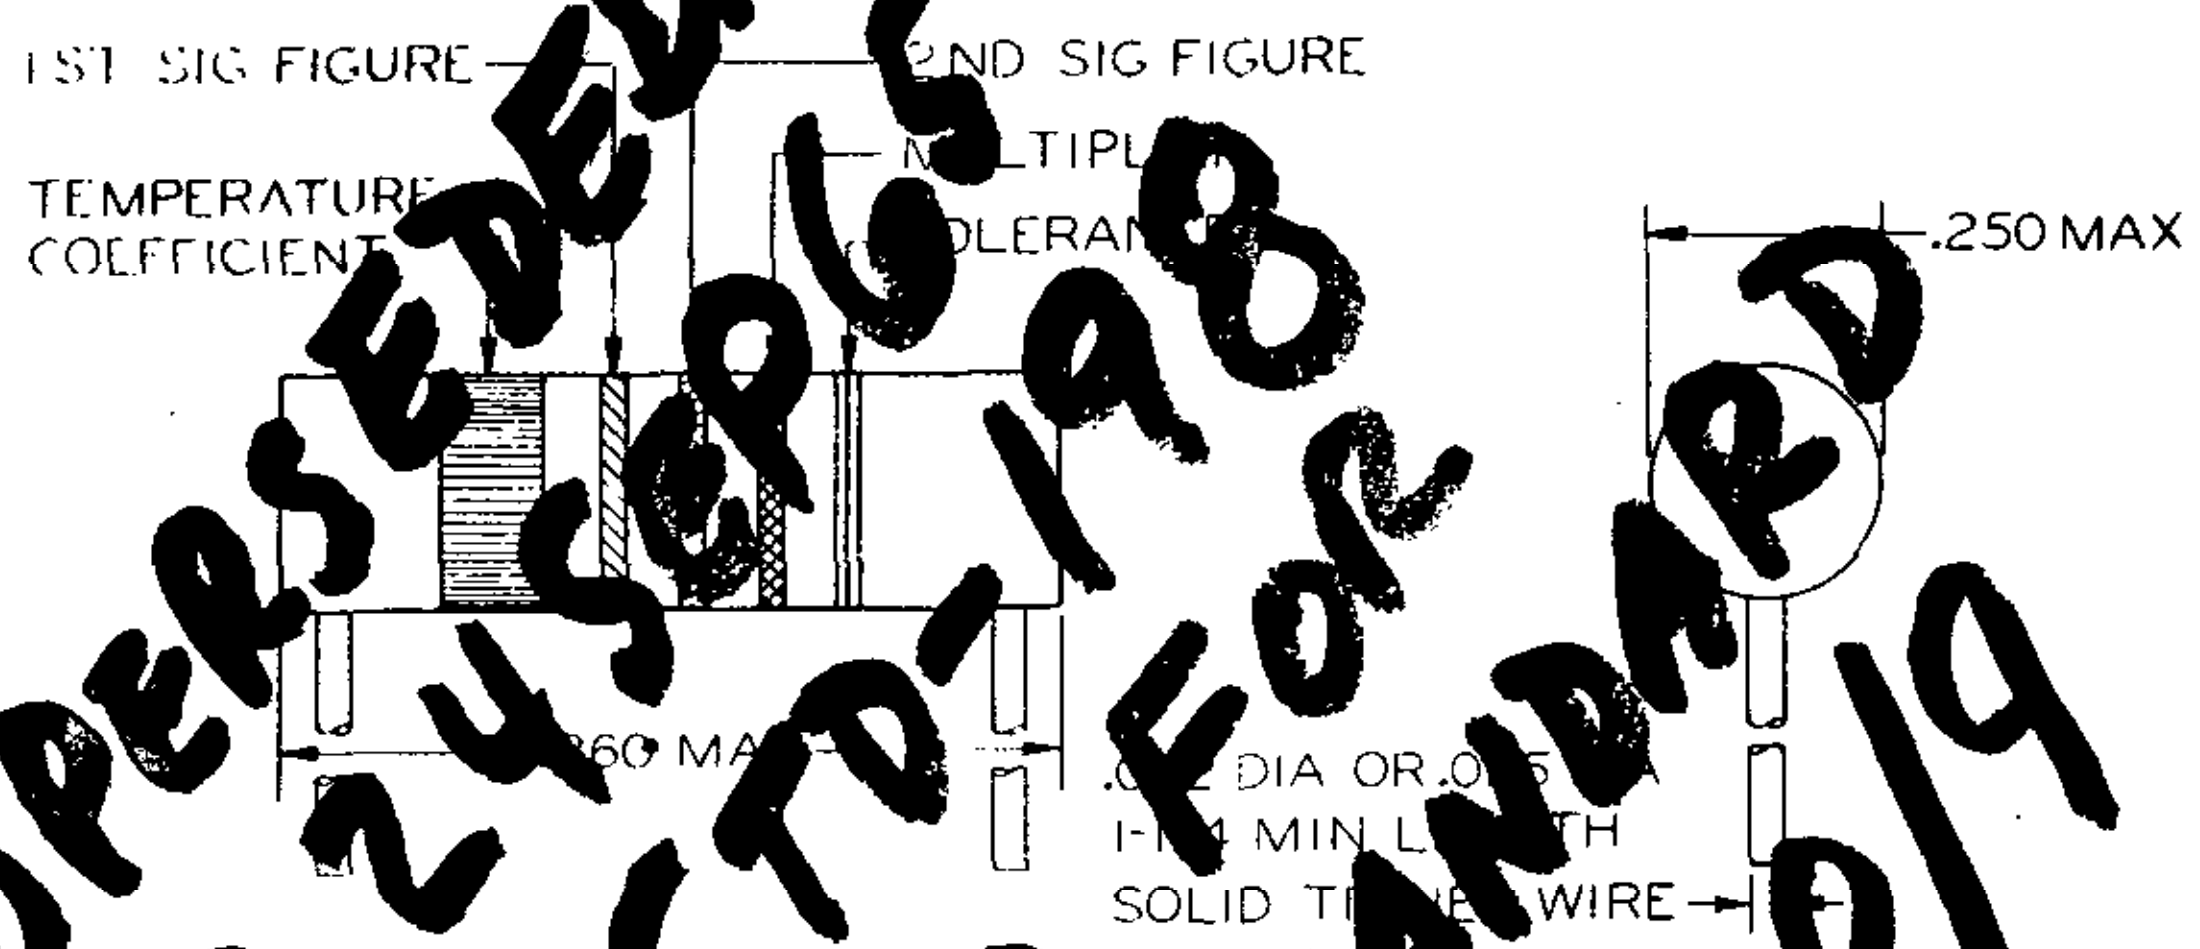

TYPE DESIGNATION CODE IN THE FOLLOWING FORM:

CC 32 CG 560 J

COMPONENT CASE CHARACTERISTIC CAPACITANCE CAPACITANCE TOLERANCE

DASH NO.	TYPE DESIGNATION	CAP. UUF	APPROX TEMP COEF PPM PER °C 1/	APPROX TEMP COEF TOL ± PPM PER °C	CAP. TOL	COLOR CODE WIDE BAND	ORDER BAND FROM WIDE BAND 1ST	 2ND	 3RD	 4TH	FIIN
[illegible]	CC32CG560J	[illegible]	ZERO	[illegible]	5%	BLACK	GREEN	BLUE	BLACK	GREEN	
-2	CC32CG620J	62	ZERO	[illegible]	5%	BLACK	BLUE	RED	BLACK	GREEN	187-2019
-3	CC32CG680J	68	ZERO	30	5%	BLACK	BLUE	GREY	BLACK	GREEN	
-4	CC32CG750J	75	ZERO	30	5%	BLACK	VIOLET	GREEN	BLACK	GREEN	112-8030
-5	CC32CG820J	82	ZERO	30	5%	BLACK	GRAY	RED	BLACK	GREEN	195-8753
-6	CC32CG910J	[illegible]	ZERO	30	5%	BLACK	WHITE	BROWN	BLACK	GREEN	195-6650
-7	CC32CG101J	[illegible]	ZERO	30	5%	BLACK	BROWN	BLACK	BROWN	GREEN	248-2217
-8	CC32CG111J	110	ZERO	30	5%	BLACK	BROWN	BROWN	BROWN	GREEN	
-9	CC32CG121J	120	ZERO	30	5%	BLACK	BROWN	RED	BROWN	GREEN	245-4642
-10	CC32PG750J	75	-150	30	5%	ORANGE	VIOLET	GREEN	BLACK	GREEN	112-7984
-11	CC32PG820J	82	[illegible]	30	5%	ORANGE	GREY	RED	BLACK	GREEN	
-12	CC32PG910J	[illegible]	-150	30	5%	ORANGE	WHITE	BROWN	BLACK	GREEN	
-13	CC32PG101J	100	-150	30	5%	ORANGE	BROWN	BLACK	BROWN	GREEN	
-14	CC32PG111J	[illegible]	-150	30	5%	ORANGE	BROWN	BROWN	BROWN	GREEN	
-15	CC32PG121J	120	-150	30	[illegible]	ORANGE	BROWN	RED	BROWN	GREEN	
-16	CC32PG131J	130	-150	30	5%	ORANGE	BROWN	ORANGE	BROWN	GREEN	
-17	CC32PG151J	150	-150	30	5%	ORANGE	BROWN	GREEN	BROWN	GREEN	
-18	CC32PG161J	160	-150	[illegible]	5%	ORANGE	BROWN	BLUE	BROWN	GREEN	
-19	CC32SH820J	82	-330	[illegible]	5%	GREEN	GREY	RED	BLACK	GREEN	197-1674
-20	CC32SH910J	91	-330	60	5%	GREEN	WHITE	BROWN	BLACK	GREEN	197-1675
-21	CC32SH101J	100	[illegible]	60	5%	GREEN	BROWN	BLACK	BROWN	GREEN	160-8102
-22	CC32SH111J	110	-330	60	5%	GREEN	BROWN	BROWN	BROWN	GREEN	197-1676

1/ FOR PRECISE TEMPERATURE COEFFICIENTS. SEE CURVES IN SPECIFICATION JAN-C-20.

ALL DIMENSIONS IN INCHES

APPROVED 5 APR 54 REVISED A 24 September 1965

CUSTODIAN SIGNAL CORPS	MILITARY STANDARD	MS35349 (SIG C)
PROCUREMENT SPECIFICATION JAN-C-20	CAPACITORS, FIXED, CERAMIC DIELECTRIC, (TEMP COMPENSATING), STYLE CC32	SHEET 1 OF 2

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Source: https://assist.dla.mil -- Downloaded: 2024-10-23T17:21Z
Check the source to verify that this is the current version before use.