
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

REVIEWER ACTIVITIES: ARMY - MD
DOD - DP
AIR FORCE - 82

USER ACTIVITIES: ARMY - ME, MI

FED. SUP CLASS
6640

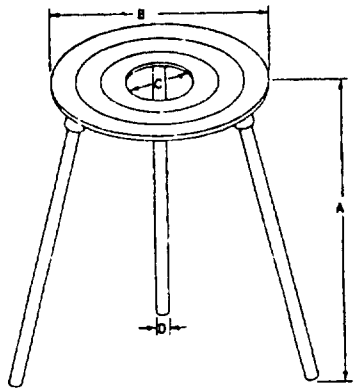


| PART NUMBER | DIMENSIONAL DATA ± 1/16 INCH | | | | |
|---|---|---|---|---|---|
| | A OVERALL HEIGHT | B OD OF OUTER RING | C ID OF SMALLEST RING | D LEG DIAMETER | NUMBER OF LOOSE RINGS ACCOMMODATED |
| MS35990-1 | 9 | 6 | 2 | 5/16 | 2 |
| MS35990-2 | 9 | 10 | 2 | 5/16 | 4 |

© MATERIAL: Ring shall be ungalvanized malleable iron in accordance with ASTM A 47 or gray iron castings in accordance with ASTM A 48.

Legs shall be of carbon steel wire in accordance with Federal Standard No. 66, Grade C1010.

FINISH: Rings shall have gray or black baked enamel finish.

Legs shall have a cadmium-, copper- or zinc-coated finish.

DESIGN: Leg shall be round and threaded in accordance with Federal Standard H28 National Coarse Thread Series. A minimum of six threads of each leg must fit into ring. Legs shall extend from bosses at equal angles; sufficient to insure stability.

Undersurface of outer ring shall have three equally spaced threaded bosses 0.038 ± 0.002 inch from the outer edge to threaded legs and shall have a minimum of five complete threads.

Bottom of inner circumference of each ring shall have an inset flange (approximately 1/4 inch) to next smaller size ring. Loose rings shall provide a flat surface when nested

NOTES:
1. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.
2. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this standard to the extent specified herein.

APPROVED 21 DEC 1959 REVISED (A) 15 DEC 1967 (B) 3 NOV 1975 (C) 16 MAR 1987

| P.A. | EA | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|---|
| Other Cust | MB MS 99 | | TRIPOD, LABORATORY APPARATUS concentric ring | MS35990 |
| Procurement Specifications NNN-T-698 | | SUPERSEDES: | | SHEET 1 OF 1 |

DD FORM 1426 MAY 71 (FORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NUMBER 6640-1407-5

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T17:32Z
Check the source to verify that this is the current version before use.