
FED. SUP CLASS
6640

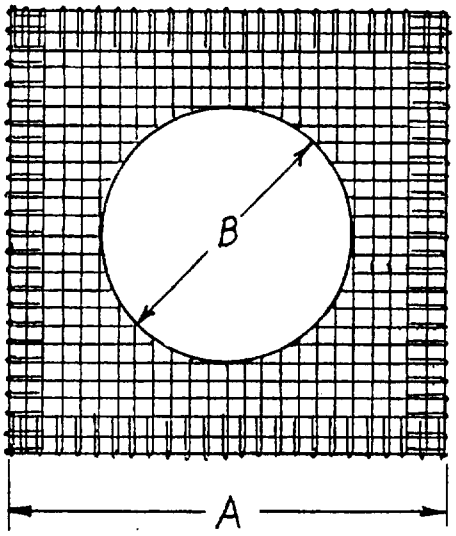

PART NUMBER	A LENGTH OF GRID SIDE (IN.)	B DIAMETER OF CENTER PATCH	WIRE DIAMETER RANGE (IN.)	MESH PER LINEAR INCH
MS36016-1	4 ± 0.12	3.0 ± 0.12	0.015 thru 0.023	10 to 16
MS36016-2	6 ± 0.12	3.5 ± 0.12	0.015 thru 0.023	10 to 16
MS36016-3	5 ± 0.12	3.2 ± 0.12	0.015 thru 0.023	10 to 16

MATERIAL: Wire shall be carbon steel in accordance with Federal Specification QQ-W-461, Composition FS1010 or FS1015.

Center patch shall be of ceramic.

FINISH: Wire shall be completely and uniformly coated with zinc, applied by electroplating. Coating shall be in accordance with Federal Specification QQ-Z-325, Type 1, Class 1.

DESIGN: Wire grid shall be square. All edges of grid shall be turned under 1/4 ± 1/16 inch to prevent fraying and to increase rigidity.

A sufficient thickness of ceramic shall be pressed into the wire mesh to a degree which will insure its retention for the life of the wire grid.

NOTES:

1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement document referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. This item is a replacement for asbestos center grids.
5. FSCM: 22527, 64484, 87664.

© ENTIRE STANDARD REVISED

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 10 Oct 1975 (C) 4 Dec 1985

USER ACTIVITIES: ARMY - ME, NAVY - MS, AIR FORCE - 03

REVIEWER ACTIVITIES: ARMY - MD, NAVY - AS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		GRID, WIRE GAUZE, LABORATORY, CERAMIC CENTER PATCH	MS36016
Procurement Specifications NNN-G-698	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NUMBER 6640-1312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.