
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, CERAMIC DIELECTRIC (TEMPERATURE COMPENSATING), ESTABLISHED AND NON-ESTABLISHED RELIABILITY, STYLES CCR81 AND CC81

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-20.

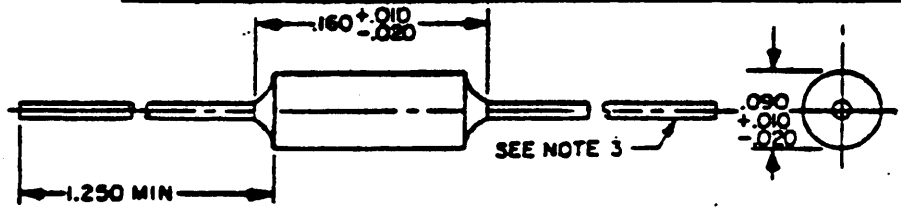

INCHES	MM
.001	.03
.005	.13
.010	.25
.016	.41
.020	.51
.090	2.29
.160	4.06
1.250	31.75

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Lead diameter shall be $.016 \substack{+.005 \\ -.001}$.

FIGURE 1. Styles CCR81 and CC81 capacitors.

REQUIREMENTS:

Design and construction:
Dimensions and configuration: See figure 1.
Lead type: Axial.
Case type: Conformal coated.
DC rated voltage: See table I.
Operating temperature range: -55° to +125° C.
Characteristic: See table I.
Failure rate level (CCR81 only): M (1.0%) or P (0.1%).

Temperature cycling and voltage conditioning (CCR81 only): In accordance with MIL-C-20.

Capacitance: Within tolerance specified (see table I).

Dissipation factor: In accordance with MIL-C-20.

Dielectric withstanding voltage: In accordance with MIL-C-20.
Body insulation - Test H.

Temperature coefficient and capacitance drift: In accordance with MIL-C-20. For capacitors with values of 18 pF or less, the temperature-coefficient tolerance shall be determined in accordance with the curve shown on figure 2. For points below the curve, characteristics are not considered practicably measurable.

Solderability: In accordance with MIL-C-20.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

TABLE I. Capacitor characteristics.

Type designation 1/	Rated voltage	Nominal capacitance	Cap. tol.	Type designation 1/	Rated voltage	Nominal capacitance	Cap. tol.
	(volts, dc)	(pF)			(volts, dc)	(pF)	
CC-81CH1R0--	200	1.0	CD	CC-81CG330--	200	33	GJK
CC-81CH1R2--	200	1.2	CD	CC-81CG390--	200	39	GJK
CC-81CH1R5--	200	1.5	CD	CC-81CG470--	200	47	GJK
CC-81CH1R8--	200	1.8	CD	CC-81CG560--	200	56	GJK
CC-81CH2R2--	200	2.2	CD	CC-81CG680--	200	68	GJK
CC-81CH2R7--	200	2.7	CD	CC-81CG820--	100	82	GJK
CC-81CH3R3--	200	3.3	CD	CC-81CG101--	100	100	GJK
CC-81CH3R9--	200	3.9	CD	CC-81CG121--	100	120	GJK
CC-81CH4R7--	200	4.7	CD	CC-81CG151--	100	150	GJK
CC-81CH5R6--	200	5.6	CD	CC-81CG181--	100	180	GJK
CC-81CH6R8--	200	6.8	CD	CC-81CG221--	100	220	GJK
CC-81CH8R2--	200	8.2	CD	CC-81CG271--	50	270	GJK
CC-81CH100--	200	10	CD	CC-81CG331--	50	330	GJK
CC-81CG120--	200	12	GJK	CC-81CG391--	50	390	GJK
CC-81CG150--	200	15	GJK	CC-81CG471--	50	470	GJK
CC-81CG180--	200	18	GJK	CC-81CG561--	50	560	GJK
CC-81CG220--	200	22	GJK	CC-81CG681--	50	680	GJK
CC-81CG270--	200	27	GJK				

1/ Complete type designation will include the following:

1st dash - Symbol "R" (for style CCR81) or dash will be deleted (for style CC81).
2nd dash - Applicable capacitance tolerance symbol.
3rd dash - Applicable failure rate level symbol (CCR81 only) or dash will be deleted (for style CC81).

Resistance to soldering heat: In accordance with MIL-C-20.

Life: In accordance with MIL-C-20, operating condition 2.

Marking: Method I of MIL-STD-1285, as shown in following example:

JCH - "J" brand (J); and characteristic (CH).
2R2 - Capacitance value.
CM3 - Cap. tolerance (C); FR level, CCR81 only (M); and year code (3 for 1973).
ATM - Lot code (A); and trademark (TM).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

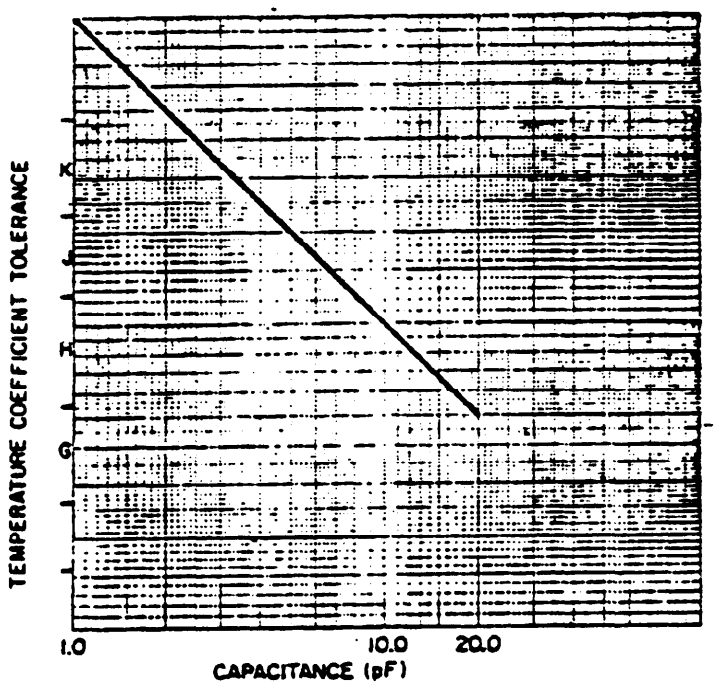


FIGURE 2. Limits for characteristic measurement.

Custodians:
Army - EL
Navy - EC
Air Force - 11

Review activities:
Army -
Navy - OS
Air Force - 80
DSA - ES

User activities:
Army -
Navy - AS, SH, MC
Air Force -

Preparing activity:
Air Force - 11

Agent:
DSA - ES

(Project 5910-1064-25)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE AIR FORCE

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 73236 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE AIR FORCE

4950/TZS
Wright-Patterson AFB OH 45433

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T17:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*:
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-15T17:07Z
Check the source to verify that this is the current version before use.