
FED. SUP CLASS
5340

FAST PIN

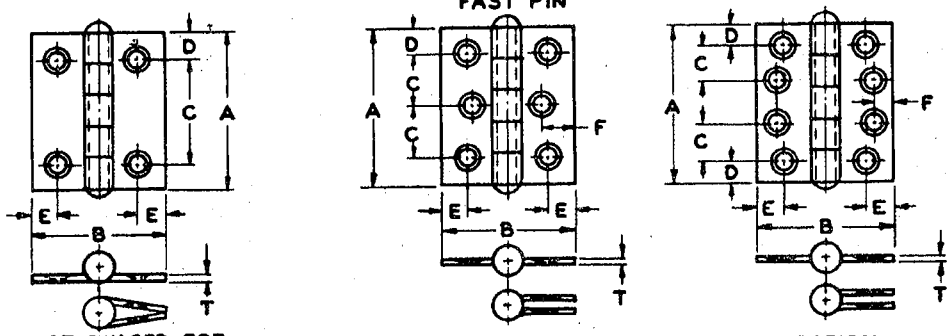

NOT SWAGED, FOR FULL SURFACE APPLICATION

SWAGED, FOR MORTISE APPLICATION

NOMINAL SIZE	A LENGTH	+0, -1/64	2	2	2	2-1/2	3
	B WIDTH	±1/64	1-1/2	2	2-1/2	2-1/2	2
	C	±.005	1.375	1.375	1.375	.928	1.188
	D	±.005	.312	.312	.312	.312	.312
	E	±.005	.250	.312	.312	.320	.312
	F	±.005				.516	.312
	T THICKNESS	±.005	.082	.082	.082	.089	.092
NUMBER OF SCREW HOLES			4	4	4	6	6
* SIZE OF SCREWS		MIN	#8-32x1/2	#8-32x1/2	#8-32x1/2	#8-32x1/2	#10-24x1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, NOT SWAGED	2	4	6	8	
FAST PIN, SWAGED	22	24	26	28	30

NOMINAL SIZE	A LENGTH	+0, -1/64	3	3	3	3-1/2	4
	B WIDTH	±1/64	2-1/2	3	4	3	4
	C	±.005	1.188	1.188	1.188	1.395	1.004
	D	±.005	.312	.312	.312	.355	.512
	E	±.005	.312	.312	.312	.360	.750
	F	±.005	.580	.580	.580	.687	.375
	T THICKNESS	±.005	.092	.092	.092	.123	.130
NUMBER OF SCREW HOLES		±.005	6	6	6	6	8
*SIZE OF SCREWS		MIN	#10-24x1/2	#10-24x1/2	#10-24x1/2	#10-24x1/2	#12-24x1/2

TYPES	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER	DASH NUMBER
FAST PIN, NOT SWAGED	12	14	16	18	20
FAST PIN, SWAGED	32	34	36	38	40

MATERIAL: BODY: WROUGHT BRASS, IN ACCORDANCE WITH SPECIFICATION QQ-B-613, COMPOSITION 11.
PIN: STEEL, CORROSION RESISTING, IN ACCORDANCE WITH FEDERAL STANDARD NO. 66, STEEL NUMBER: 303.

PROTECTIVE COATING: SATIN NICKEL PLATED, IN ACCORDANCE WITH SPECIFICATION QQ-N-290, MIN 0.0002 INCH THICK.

*SCREWS: HINGES ARE FURNISHED WITH MACHINE SCREWS IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION.

SIZE: THE WIDTH DIMENSION OF NOT SWAGED HINGES WILL BE SLIGHTLY NARROWER THAN SHOWN IN TABLE.

DIMENSIONS: ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED.

PART NUMBER: THE MS PART NUMBER CONSISTS OF THE MS NUMBER, PLUS THE DASH NUMBER. EXAMPLE: MS27958-6.

NOTES: (1) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(2) FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 24 FEB 61 REVISED

NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ORD Other Cust DOCKS WADC	TITLE HINGE, BUTT-NARROW AND BROAD, TEMPLATE, HARDWARE, BUILDER'S, COMMERCIAL, BRASS	MILITARY STANDARD MS27958
PROCUREMENT SPECIFICATION MIL-H-1237	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:53Z
Check the source to verify that this is the current version before use.