NOTICE.—When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specification, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

This military standard is approved by the Department of Defense and is mandatory for use by all activities. Selection for all new engineering and design applications and for repetitive use should be made from this document.

FED. SUP CLASS
9925

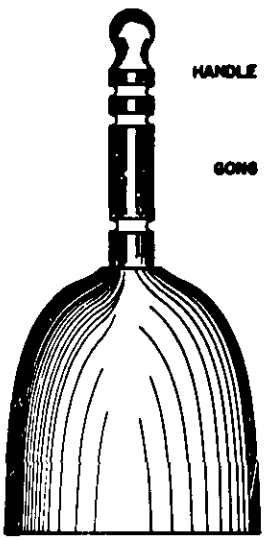

ASSEMBLY

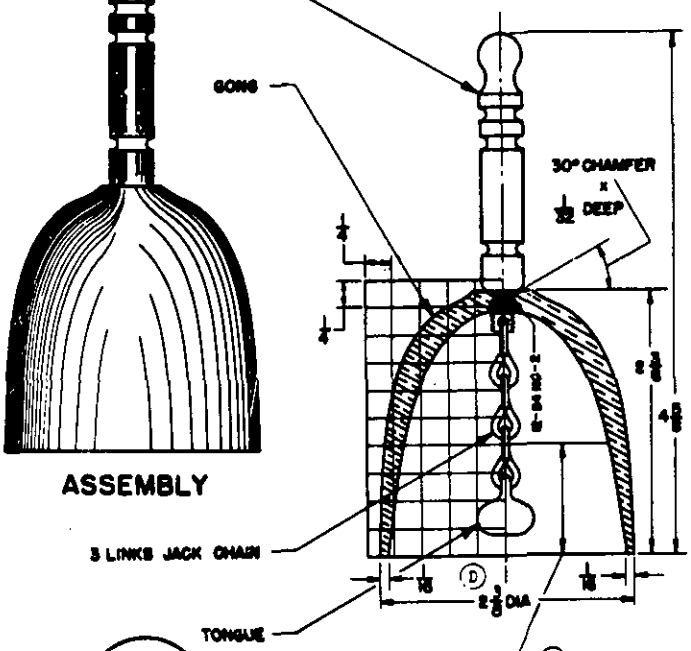

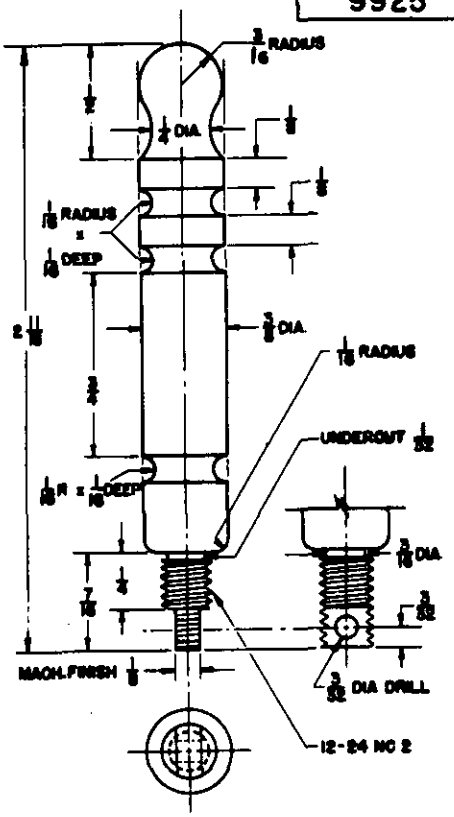

Ⓓ INSIDE OF GONG SHALL BE MACHINE FINISHED SUFFICIENTLY TO PERMIT STRIKING OF TONGUE ON A MACHINE FINISHED SURFACE.

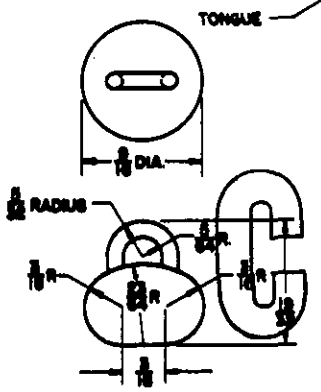

CANCELLED

MS part No.	Finish
MS15297-1	1
MS15297-2	2

EFFECTIVE DATE
14 JAN 1966

MATERIAL: GONG - 83 PERCENT COPPER, 15 PERCENT TIN, 2 PERCENT ZINC, LEAD AND IRON
HANDLE - COMMERCIAL BRASS
TONGUE - CAST IRON
CHAIN - 0.0508 INCH DIA. BRASS WIRE

FINISH 1: ALL SURFACES, EXCEPT THE INSIDE OF THE GONG, SHALL BE HIGHLY POLISHED AND GOLD LACQUERED. (FINISH 1 SHALL BE USED UNLESS FINISH 2 IS SPECIFIED BY THE CONTRACT OR ORDER.)

FINISH 2: WHEN SPECIFIED, ALL SURFACES EXCEPT THE INSIDE OF THE GONG SHALL BE PLATED AS FOLLOWS: ELECTRODEPOSIT COPPER TO A MINIMUM THICKNESS OF 0.0003 INCH. ELECTRODEPOSIT THEREON NICKEL TO A MINIMUM THICKNESS OF 0.0005 INCH. BUFF PARTS MODERATELY AFTER APPLICATION OF NICKEL, THEN ELECTRODEPOSIT CHROMIUM TO NOT LESS THAN 0.00002 INCH THICK NOR MORE THAN 0.00005 INCH THICK IN ACCORDANCE WITH CLASS 1, TYPE I OF SPECIFICATION QQ-C-320.

MARKING: THE LETTERS "U.S." SHALL BE ENGRAVED OR ETCHED IN 1/4 INCH HIGH LETTERS INSIDE GONG.

TOLERANCES: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS FOLLOWS:

DIMENSIONS 1 INCH AND OVER	± 1/16 INCH
DIMENSIONS 3/8 INCH TO 1 INCH	± 1/32 INCH
DIMENSIONS UNDER 3/8 INCH	± 0.005 INCH

(TO DETERMINE TOLERANCES FOR FRACTIONAL DIMENSIONS UNDER 3/8 INCH, CHANGE FRACTIONS TO DECIMAL EQUIVALENTS).

APPROVED 10 OCT 1952 REVISED (A) 29 JULY 1953 (B) 17 MAY 1954 (C) 4 NOVEMBER 1955 (D) 29 APRIL 1963

P.A. GL Other Cust PERS AFLC	TITLE BELL, SANCTUS	MILITARY STANDARD MS 15297	
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1	

DD FORM SEP 67 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 20261023T13:47Z
Check the source to verify that this is the current version before use.