FED. SUP CLASS
5340

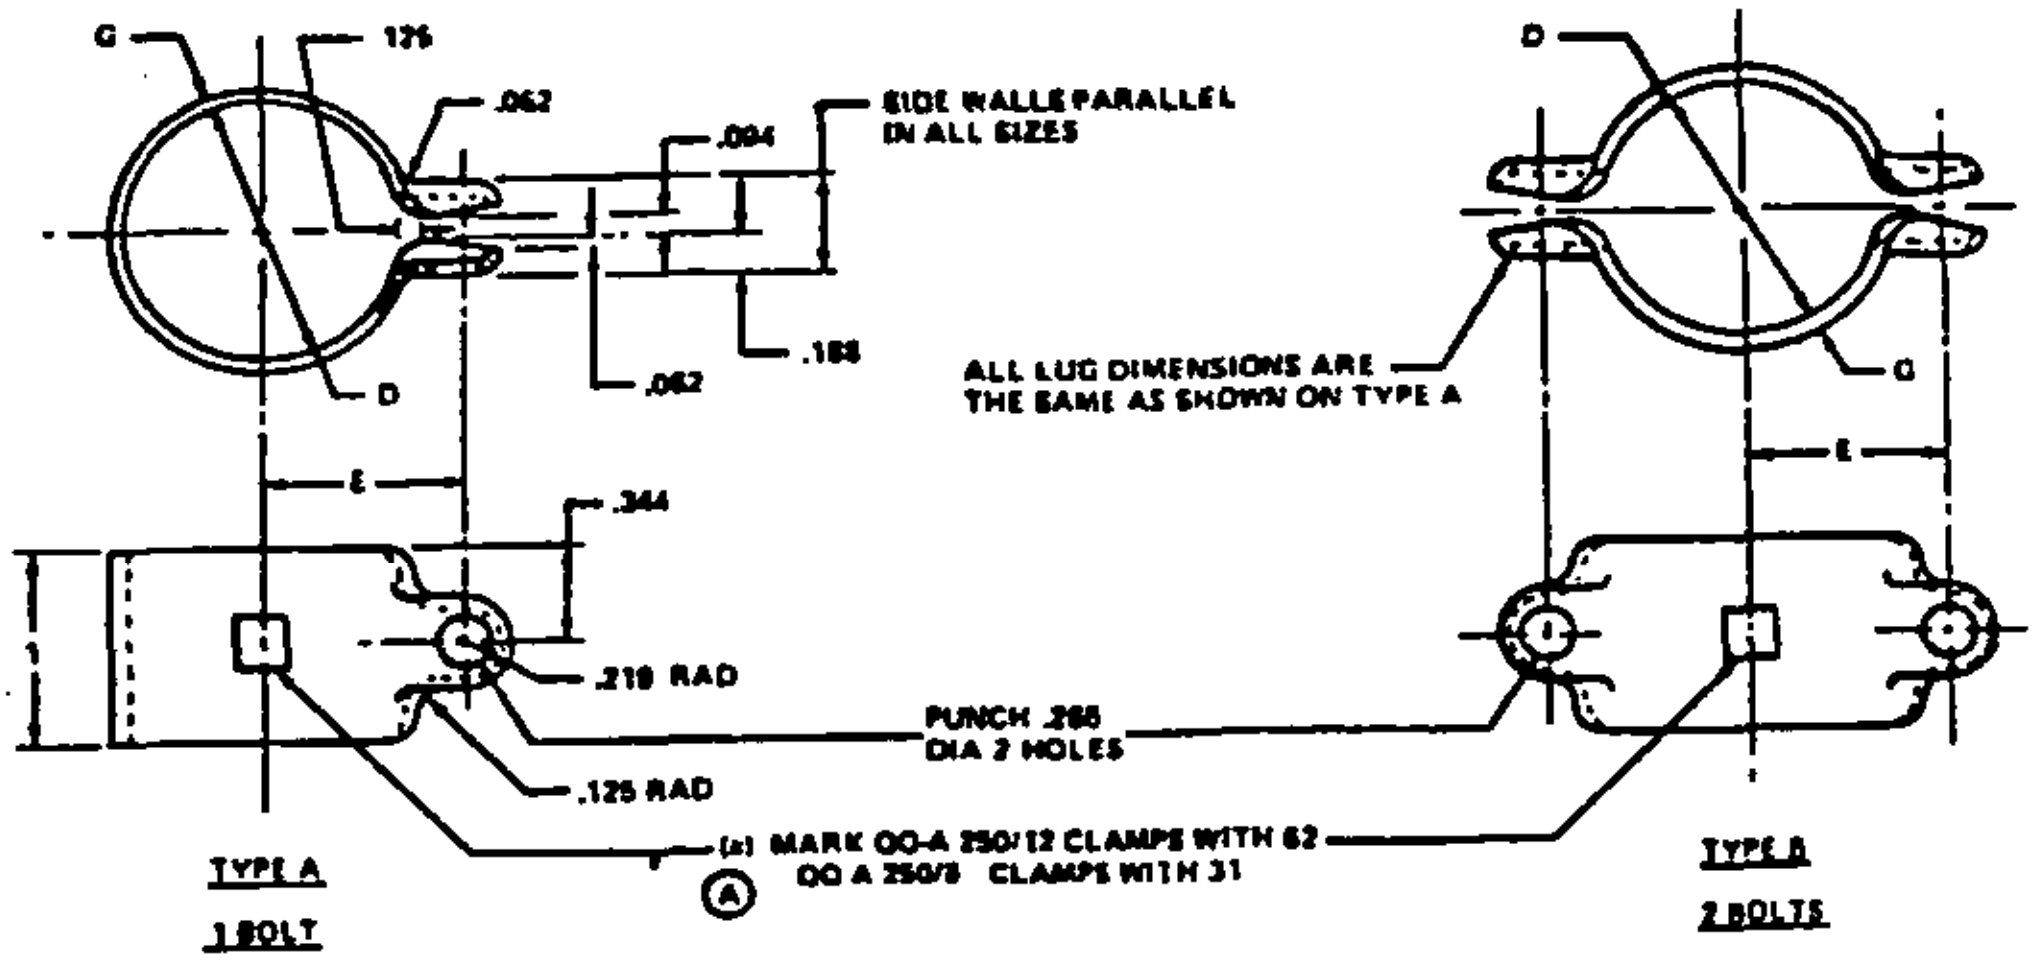

(a) MARK QQ-A 250/12 CLAMPS WITH 62
Ⓐ QQ A 250/8 CLAMPS WITH 31

MS PART NO						DIMENSIONS			
TYPE A			TYPE B			D DIA	E	G	
STEEL		ALUMINUM ALLOY	STEEL		ALUMINUM ALLOY			STEEL	ALUM. ALLOY
UNPLATED	PLATED		UNPLATED	PLATED					
MS27405 4	MS27405 4P	MS27405 D4	MS27405 T4	MS27405 T4P	MS27405 TD4	.500	.453	.050	.051
MS27405 5	MS27405 5P	MS27405 D5	MS27405 T5	MS27405 T5P	MS27405 TD5	.625	.562		
MS27405 6	MS27405 6P	MS27405 D6	MS27405 T6	MS27405 T6P	MS27405 TD6	.750	.641		
MS27405 7	MS27405 7P	MS27405 D7	MS27405 T7	MS27405 T7P	MS27405 TD7	.875	.719		
MS27405 8	MS27405 8P	MS27405 D8	MS27405 T8	MS27405 T8P	MS27405 TD8	1.000	.781		
MS27405 9	MS27405 9P	MS27405 D9	MS27405 T9	MS27405 T9P	MS27405 TD9	1.125	.859		
MS27405 10	MS27405 10P	MS27405 D10	MS27405 T10	MS27405 T10P	MS27405 TD10	1.250	.922		
MS27405 11	MS27405 11P	MS27405 D11	MS27405 T11	MS27405 T11P	MS27405 TD11	1.375	1.000		
MS27405 12	MS27405 12P	MS27405 D12	MS27405 T12	MS27405 T12P	MS27405 TD12	1.500	1.062		
MS27405 13	MS27405 13P	MS27405 D13	MS27405 T13	MS27405 T13P	MS27405 TD13	1.625	1.125		
MS27405 14	MS27405 14P	MS27405 D14	MS27405 T14	MS27405 T14P	MS27405 TD14	1.750	1.188		
MS27405 15	MS27405 15P	MS27405 D15	MS27405 T15	MS27405 T15P	MS27405 TD15	1.875	1.250		
MS27405 16	MS27405 16P	MS27405 D16	MS27405 T16	MS27405 T16P	MS27405 TD16	2.000	1.328		
MS27405 17	MS27405 17P	MS27405 D17	MS27405 T17	MS27405 T17P	MS27405 TD17	2.125	1.391		
MS27405 18	MS27405 18P	MS27405 D18	MS27405 T18	MS27405 T18P	MS27405 TD18	2.250	1.453		
MS27405 19	MS27405 19P	MS27405 D19	MS27405 T19	MS27405 T19P	MS27405 TD19	2.375	1.516		
MS27405 20	MS27405 20P	MS27405 D20	MS27405 T20	MS27405 T20P	MS27405 TD20	2.500	1.578		

NOTES

Ⓐ MATERIAL: ALUM ALLOY, SPEC. QQ-A-250/12 (7075) T73 TEMPER, TEN STR REQUIREMENTS OF 62,000 PSI MIN
ALUM ALLOY, SPEC QQ-A-250/8, H32 TEN STR REQUIREMENTS OF 31,000 PSI MIN.
STEEL, SPEC QQ-S-698 1015, T4

Ⓐ FINISH: ALUM ALLOY, ANODIZE, SPEC. MIL-A-8625, TYPES I OR II
STEEL, CADMIUM PLATE PER SPEC QQ-P-416 TYPE II, CLASS 2

ADD H BEFORE DASH NOS FOR CLAMP, ALUM ALLOY, SPEC QQ-A-250/8.

EXAMPLE PART NOS

- MS27405 6 - CLAMP, TYPE A, STEEL, UNPLATED.
- MS27405 6P CLAMP, TYPE A, STEEL, PLATED
- MS27405 D6 CLAMP, TYPE A, ALUM ALLOY, SPEC. QQ-A-250/12.
- MS27405 T6 - CLAMP, TYPE B, STEEL, UNPLATED.
- MS27405 T6P CLAMP, TYPE B, STEEL, PLATED
- MS27405 HD6 - CLAMP, TYPE A, ALUM. ALLOY, SPEC. QQ-A-250/8. Ⓐ
- MS27405 TD6 - CLAMP, TYPE B, ALUM. ALLOY, SPEC. QQ-A-250/12.
- MS27405 HTD6 CLAMP, TYPE B, ALUM. ALLOY, SPEC. QQ-A-250/8. Ⓐ

IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.
(MARK BOTH HALVES OF TYPE B CLAMP)
MARKING FOR SHIPMENT SHALL BE IN ACCORDANCE WITH MIL-STD-129.
Ⓐ DIMENSIONS IN DECIMALS TOLERANCES DECIMALS ± .010.
REMOVE BURRS AND SHARP EDGES.
Ⓐ MS27405 ITEMS ARE UNIVERSALLY INTERCHANGEABLE WITH AN741 ITEMS OF LIKE DASH NUMBERS.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
Ⓐ FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

User activities: ARMY-AT

Review activities: AIR FORCE 82, ARMY AV, NAVY AS, DSA CS

This military standard is approved by the Department of Defense and is mandatory [illegible] for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 14 APR 65 REVISED Ⓐ 23 Dec 71

P.A. AIR FORCE -82 Other Cust NAVY - AS ARMY - AV	TITLE CLAMP, LOOP	MILITARY STANDARD MS 27405
PROCUREMENT SPECIFICATION NONE	SUPERSEDES AN741	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:23Z
Check the source to verify that this is the current version before use.