MIL-P-20635B
16 March 1976
SUPERSEDING
MIL-P-20635A
9 February 1961

MILITARY SPECIFICATION

POST, SCREW, METAL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers medium (2-foot 8-inch) metal posts which screw into the ground.

2. APPLICABLE DOCUMENTS.

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal form a part of this specification to the extent specified herein:

SPECIFICATIONS

Federal

QQ-W-461	- Wire, Steel, Carbon, (Round, Bare and Coated).

Military

MIL-T-704	- Treatment and Painting of Materiel.

STANDARDS

Federal

FED. STD. No. 356	- Commercial Packaging of Supplies and Equipment.

Military

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

FSC 5660

Source: https://assist.dla.mil -- Downloaded: 20261O-19T08:08Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

A 575 - Hot Rolled Steel.

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

3. REQUIREMENTS

3.1 Description. The screw posts shall be in accordance with Figure 1 and as specified herein. Figure 1 forming a part of this specification is not intended for use as a shop drawing. Critical dimensions and tolerances are furnished; however, the contractor is responsible for preparing his own shop drawings. Where tolerances are not shown, or where those prescribed could cumulatively result in improper fits, the contractor is responsible for providing tolerances in accordance with industry standards for similar equipment, and within those prescribed on Figure 1 to insure proper fit, assembly, and operation of the equipment. No deviation from dimensions or tolerances shown on Figure 1 is permissible without prior approval of the contracting officer.

3.2 First article (first-produced screw post). The contractor shall furnish one or more screw posts as specified (see 6.2), for examination and testing within the time frame specified (see 6.2), to prove that his production methods will produce screw posts that comply with the requirements of this specification. Examination and tests shall be as specified in Section 4 and shall be subject to surveillance and approval by the Government (see 6.3).

3.3 Material. Material shall be Hot Rolled Steel, ASTM A 575; Grade 1010-1020.

3.4 Treatment and painting. Screw posts shall be cleaned, treated, and painted in accordance with MIL-T-704. Painting shall be in accordance with Type C.

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the current version before use.

3.5 Size. The screw post shall have an overall length of 2 feet 8 inches (81.28 cm) and shall be as shown in Figure 1.

3.6 Workmanship. Steel used in the fabrication of the screw posts shall be free from kinks and sharp bends. The straightening and bending of the steel shall be performed by methods that will not weaken the metal. Burrs shall be removed. Sharp edges and fillets shall not be less than .005 to .015 R.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) First-produced screw posts inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).
(c) Inspection of packaging (see 4.6).

4.3 First-produced screw post inspection.

4.3.1 Examination. The screw post shall be examined as specified in 4.5. Presence of one or more defects shall be cause for rejection.

4.4 Quality conformance inspection.

4.4.1 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.4.2 Examination. Samples selected in accordance with 4.4.1 shall be examined for the defects specified in 4.5. AQL shall be 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:08Z
Check the source to verify that this is the currentversion before use.

4.5 Inspection procedure.

4.5.1 Examination. The screw posts shall be examined as specified herein for the following defects:

Major

101. Dimensions not as specified.
102. Screw not a true helix (constant angle).
103. Point of the screw not properly sharpened.
104. Material not as specified.
105. Evidence of kinks or sharp bends in metal.

Minor

201. Incorrect treatment and painting.
202. Evidence of burrs on metal.

4.6 Inspection of packaging.

4.6.1 Quality conformance inspection of pack.

4.6.1.1 Unit of product. For the purpose of inspection, a completed pack prepared for shipment shall be considered a unit of product.

4.6.1.2 Lot size - one shift production (maximum).

4.6.1.3 Sampling. Sampling for examination shall be in accordance with MIL-STD-105.

4.6.1.4 Examination. Samples selected in accordance with 4.6.1.3 shall be examined for the following defects. AQL shall be 2.5 percent defective.

106. Materials not as specified.
107. Posts not bundled together in the quantities specified for Level A.
108. Wire not applied and secured to the bundles as specified for Level A.
109. Size 1 and Size 2 posts not packed on the pallets on end with ends of bundles alternated as specified for Level A.
110. Size 3 posts not packed in frames as specified for Level A.
111. Pallets or frames not fabricated in accordance with applicable figures as specified.
112. Marking illegible, incomplete, incorrect, or missing.

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:08Z
Check the source to verify that this is the current version before use.

5. PACKAGING

5.1 Preservation. Preservation shall be Level A (maximum military protection) or Commercial, as specified (see 6.2).

5.1.1 Level A (maximum military protection). The posts shall be nested with the screw ends together in quantities of eight posts to form a compact bundle. Each bundle shall be secured with two wires conforming to QQ-W-461, AISI 1010, Finish 5, soft, Class 2, Size 12 gage. One wire shall be threaded through the loop near the top end of each post and the ends of the wires shall be twisted tightly together. The other wire shall be wrapped around the posts at approximately 3 inches from the screw ends of the posts, and the ends of the wire shall be twisted tightly together. The ends of the wires shall be bent in to prevent damage by snagging during handling of the bundles.

5.1.2 Commercial. Posts of like description shall be preserved in accordance with FED. STD. No. 356.

5.2 Packing. Packing shall be Level A (maximum military protection) or Commercial, as specified (see 6.2).

5.2.1 Level A (maximum military protection). The posts shall be packed on pallets fabricated in accordance with Figure 2. The bundles shall be placed on the pallets standing on end, and the ends of the bundles shall be alternated.

5.2.2 Commercial. Posts of like description shall be packed in accordance with FED. STD. No. 356.

5.3 Marking.

5.3.1 Military. Military marking shall be in accordance with MIL-STD-129.

5.3.2 Commercial. Commercial marking shall be in accordance with FED. STD. No. 356.

6. NOTES

6.1 Intended use. Screw posts are used to provide framework and support for fencing and to support pipe in polareas.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Time frame required for submission of first-produced screw posts and number of screw posts required (see 3.2).
(c) Degree of preservation and of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:08Z
Check the source to verify that this is the current version before use.

6.3 First-produced screw posts. Any changes or deviations of first-produced screw posts from the approved first-produced screw post during production will be subject to the approval of the contracting officer. Approval of the first-produced screw posts will not relieve the contractor of his obligation to furnish screw posts conforming to this specification.

6.4 Classification changes. Sizes 1 and 3 posts have been discontinued, since they are no longer required. The Size 2 post is still required and is covered by this specification.

Custodians:

Army - ME
Air Force - 84

Review activities:


DSA - CS

Preparing activity:

Army - ME

Project No. 5660-0034

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.

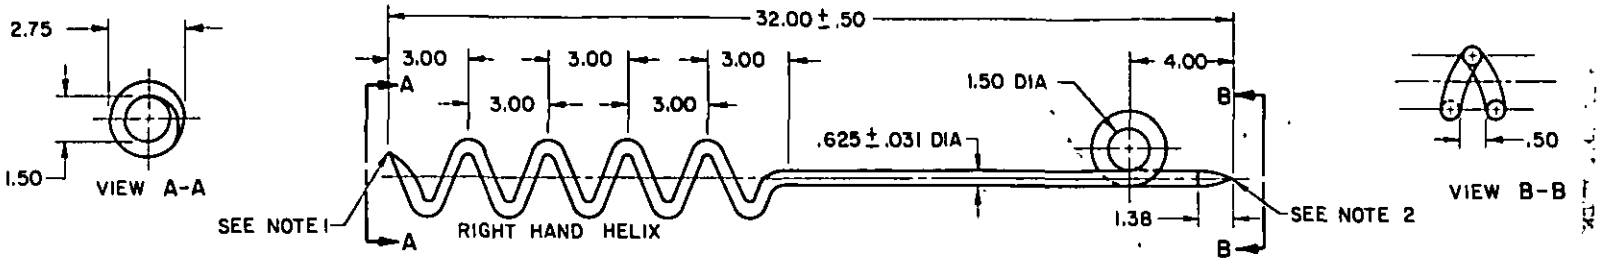


NOTES:

1. POINT FORMED BY SHEARING AND GRINDING 1/4 TURN ON TOP AND OUTSIDE ONLY.
2. POINT FORMED BY SHEARING.
3. ALL DIMENSIONS ARE IN INCHES.
4. UNSPECIFIED TOLERANCE ± .12 .

FIGURE 1. POST, SCREW, METAL


X-3124A

Source: https://assist.dla.mil -- Downloaded: 202610-19T08:08Z
Check the source to verify that this is the current version before use.

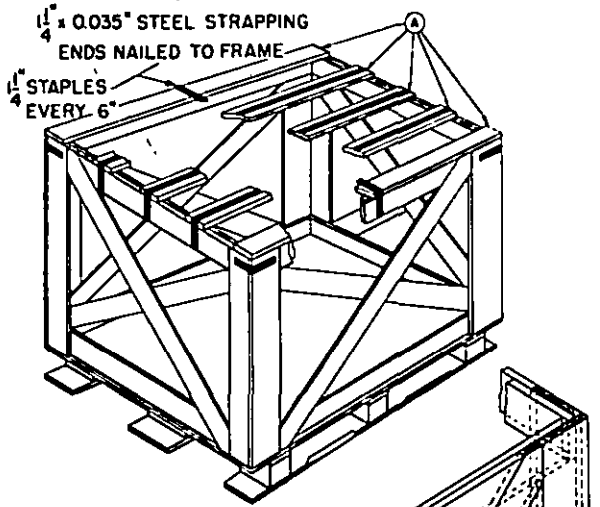


ASSEMBLY


44.89 CU. FT.
APPROX. WT. 1890 LBS.



CORNER DETAIL
(TOP BOARD REMOVED)




END ASSEMBLY

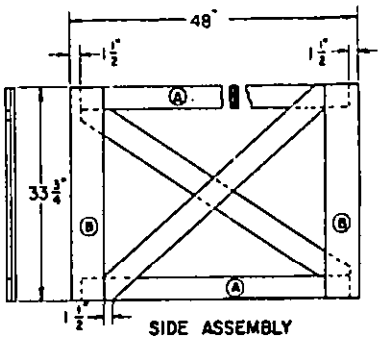



SIDE ASSEMBLY

MEMBERS	
PART	SIZE
A	1 X 4
B	1 X 6
C	1 X 8
D	4 X 4





NOTE: NAILS DRIVEN WITHIN 4" OF EACH OTHER SHALL NOT BE IN THE SAME LINE OF GRAIN ON EITHER OF THE MEMBERS BEING NAILED.



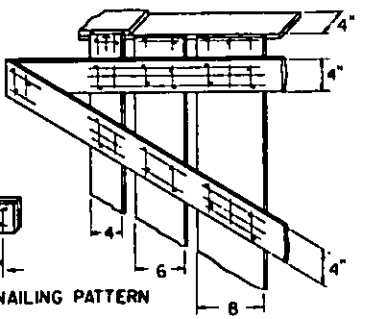

NAILING PATTERN



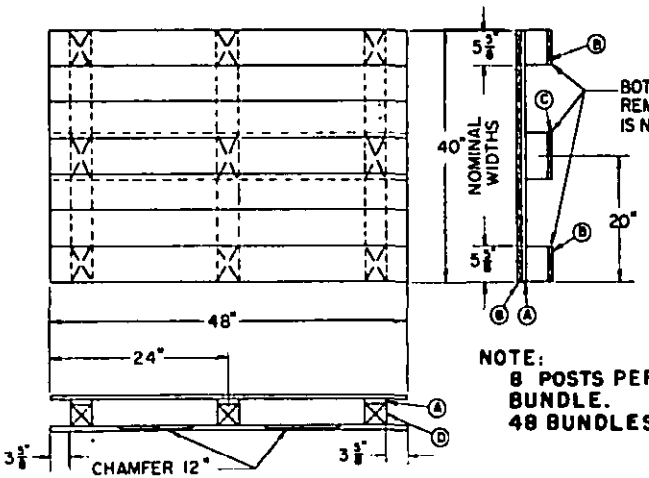

BOX PALLET ASSEMBLY

BOTTOM BOARDS SHALL REMAIN OFF UNTIL PALLET IS NAILED TO FRAME

NOTE:
8 POSTS PER UNIT BUNDLE.
48 BUNDLES

NAIL REQUIREMENTS

ALL UNCLINCHED NAILS CEMENT COATED OR ETCHED		
6d	8d	10d
SIDE & END ASSEMBLIES (CLINCH)	FLOORBOARDS TO TRANSVERSE STRINGERS (CLINCH)	TRANSVERSE STRINGERS TO POSTS
STRAPS	SIDES TO ENDS	SIDES & ENDS TO FLOORBOARDS
	TOPS TO SIDES & ENDS	BOTTOM BOARDS TO POSTS

FIGURE 2. PALLETS

X-3126A

Source: https://assist.dla.mil -- Downloaded: 202640-19T08:08Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Mobility Equipment Research and
Development Center
ATTN: DRXFB-DS
Ft. Belvoir, VA 22060

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or *manufacturers/ vendors who are prospective* suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to *amend contractual requirements.* Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-P-20635B Post, Screw, Metal

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T08:08Z
Check the source to verify that this is the current version before use.