
This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

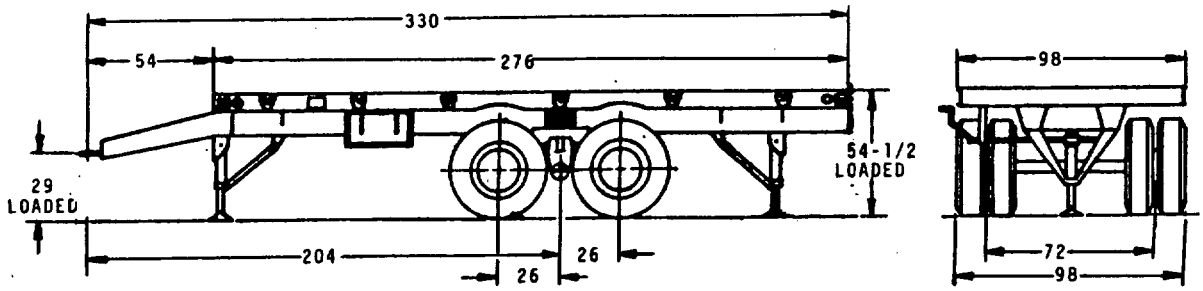

VEHICLE CHARACTERISTICS

PRIME MOVER:
TRUCK, CARGO, 5 TON, 6 X 6

CURB WEIGHT: 11,260 LBS.

WEIGHT DISTRIBUTION:

LUNETTE	829
AXLE	10,431
LANDING GEAR	1,125
AXLE	10,135 LBS.

MAXIMUM WEIGHT: INCLUDING BODY AND PAYLOAD EVENLY DISTRIBUTED.

	LOADED
LUNETTE	1,828
AXLE	29,432
	31,260 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

GENERAL:
THE M345 FLATBED TRAILER IS DESIGNED TO TRANSPORT HEAVY DUTY EQUIPMENT OVER HARD SURFACED AND CROSS COUNTRY ROADS. IT IS CAPABLE OF FORDING HARD BOTTOM WATER CROSSINGS TO THE DEPTH WHICH IS CAPABLE OF BEING FORDED BY THE TOWING VEHICLE. THE TRAILER FRAME IS CONSTRUCTED OF STRUCTURAL AND PRESSED STEEL. CHOCK BLOCKSARE PROVIDED TO KEEP THE VEHICLE FROM MOVING WHEN PARKED.

LUNETTE:
PART NO. 7979867

LANDING GEAR: INST'N DWG. NO. 8733826
LANDING GEAR, (2) P/N 8343622
ACTUATION: 2 SPEED, MANUALLY OPERATED.
STROKE FULLY EXTENDED- 15 INCHES.

ELECTRICAL SYSTEM:
INST'N DWG. NO. 10924628
POTENTIAL - 24 VOLTS

DECK ASSY.:
PART NO. 8733833

FRAME ASSY.:
PART NO. 8733737

AXLE: (2) (B)
AXLE ASS'Y FRONT, P/N 8710738
AXLE ASS'Y REAR, P/N 8710739

SPRINGS: (2) P/N 8733785

WHEELS: DUAL, P/N MS53044-6.
SIZE, 7-1/2 X 20

TIRES: 11.00-20, 12 PLY RATING, (B)
P/N MIL-T-12459 (B)
TREAD DESIGN - NDCC
TUBE: P/N ZZ-I-550 (B)

BRAKES: ACTUATION, AIR/HYDRAULIC.
INST'N DWG. NO. 8733843
BRAKE ASS'Y, LH, P/N 8710719
BRAKE ASS'Y RH, P/N 8710720
EMERGENCY RELAY VALVE, P/N MS53004-1
AIR RESERVOIR, P/N 7974405

MAXIMUM TOWING SPEEDS:
CROSS COUNTRY 20 MPH.
HIGHWAY 50 MPH.

CHOCK BLOCKS: (2) P/N 8343584

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48397-5000.

(B) DENOTES CHANGE

NOT MEASUREMENT SENSITIVE

MS PART NO.	ENGINEERING DRAWING NO.
MS500032-1	8358914

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY- AT NAVY-
AIR FORCE-

REVIEW:

USER:

PROJECT NUMBER: 2330-A984

MILITARY SPECIFICATION SHEET

TITLE:

TRAILER, FLATBED, 10-TON, 4 WHEEL, M345

SPECIFICATION SHEET NUMBER:
MS500032B(AT) 1 FEBRUARY 1989

SUPERSEDING:
MS500032A(AT), 15 JANUARY 1985

AMSC-NA FSC- 2330

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:45
Check the source to verify that this is the current version before use.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.