
USER ACTIVITIES:
REVIEWER ACTIVITIES:
This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

FED. SUP CLASS
2330

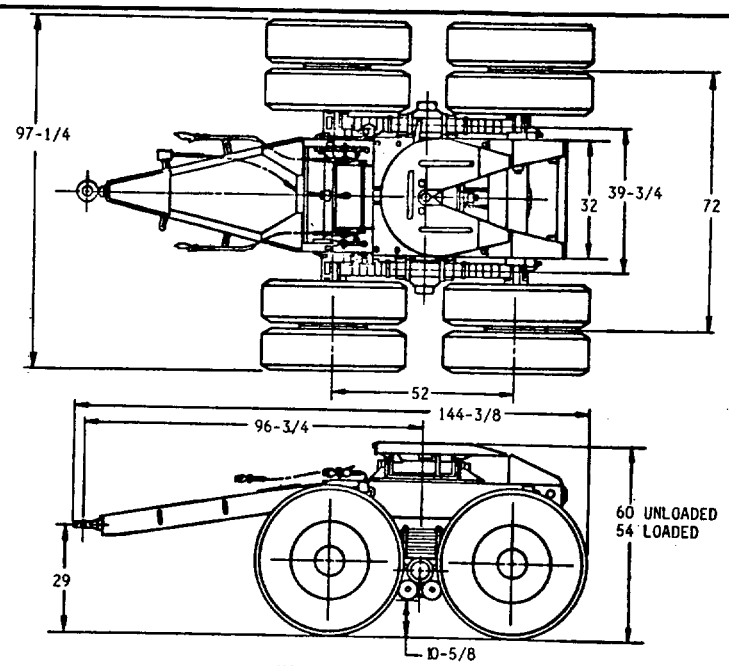


VEHICLE CHARACTERISTICS

| | | |
|---|---|---|
| CURB WEIGHT: | | 6100 LBS. |
| LESS PAYLOAD AND PERSONNEL | | |
| LUNETTE | 100 | |
| BOGIE | 6000 | |
| TOTAL | 6100 LBS. | |
| GROSS LOAD: | | |
| PAYLOAD | | 30000 LBS. |
| LOADED | | 36100 LBS. |
| TOWED LOAD, MAXIMUM: | | |
| LOADED | | 30000 LBS. |

DOLLY, TRAILER CONVERTER: 15 TON, 4 WHEEL, M354, IS USED TO CONVERT A SEMITRAILER INTO A FULL TRAILER AND PERMIT TRANSPORTING BY ANY PRIME MOVER. THE TRAILER DOLLY CONSISTS OF A FRAME, MOUNTING A FIFTH WHEEL FOR COUPLING TO THE SEMITRAILER, AND IS MOUNTED ON DUAL TANDEM AXLES WITH DUAL WHEELS AND SPRING CHASSIS. A DRAWBAR AND LUNETTE ARE PROVIDED AT THE FRONT OF THE FRAME FOR TOWING THE VEHICLE EITHER INDEPENDENTLY OR COUPLED TO A SEMITRAILER. NO LANDING GEAR IS REQUIRED. THE DOLLY IS EQUIPPED WITH AIRBRAKE SYSTEM AND ELECTRICAL SYSTEM.

| | | |
|---|---|---|
| FIFTH WHEEL ASSY: | | 10950712 |
| SWIVEL PLATE ASSY | | 10950713 |
| BASE PLATE WELDMENT | | 10950715 |
| LEVELING SPRING, TWO | | 8713973 |
| PIN ASSY | | 10950698 |
| LUNETTE: | | MS51337-1 |
| DRAWBAR ASSY | | 10950705 |
| CHAIN ASSY., SAFETY, TWO | | 11592588 |
| U BOLT ASSY., FOUR | | 11592587 |
| REAR SUSPENSION: | INSTL | 10950340 |
| REAR AXLE, TWO | | 10950341 |
| REAR SPRINGS, TWO | | 7979217 |
| TORQUE ROD ASSY., SIX | | 7979189 |
| TRUNNION TUBE ASSY | | 7979355 |

| | | |
|---|---|---|
| FRAME ASSY: | | 10950661 |
| RAMP ASSY., LEFT HAND | | 10950693 |
| RAMP ASSY., RIGHT HAND | | 11592578 |
| CROSS MEMBER, REAR | | 10950665 |
| RING, LIFTING & TIE DOWN, FOUR | | 8379604 |
| WHEELS: DUAL, INCL RING, EIGHT | | MS53044-6 |
| SIZE, 7.5 X 20, OFFSET 6-11/16 | | |
| RING | | MS53045-3 |
| TIRES: EIGHT | | MS35388-21 |
| SIZE, 11.00 X 20, 12 PLY | | |
| TREAD DESIGN, NDCC | | |
| TUBES: | | MS35392-15 |
| AIR AND HYDRAULIC: | INSTL | 10950739 |
| TANK ASSY., AIR | | 11597380 |
| VALVE, EMERGENCY, RELAY | | MS53004-1 |
| COUPLING, HOSE, TWO | | MS35746-1 |
| AIR CLEANER, TWO | | 7097063 |
| HUB AND DRUM ASSY., LEFT HAND | | 8710721 |
| HUB AND DRUM ASSY., RIGHT HAND | | 8710722 |
| BRAKE SIZE, 16-1/2 X 5-1/2 | | |
| ELECTRICAL SYSTEM: | INSTL | 10950748 |
| POTENTIAL, 24 VOLT | | |
| STOPLIGHT, BLACKOUT | | MS51302-1 |
| LIGHT ASSY., STOP, TURN, TAIL TWO | | MS51329-1 |
| RECEPTACLE AND LEADS ASSY | | 10950707 |
| HARNESS ASSY., TAILLAMP | | 10950749 |
| HARNESS ASSY., INTERVEHICULAR | | 7728812 |
| REFLECTORS: RED, FOUR | | MS35387-1 |

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS. COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

(A) ENTIRE STANDARD REVISED

| MS PART NO. | ENGINEERING DWG NO |
|---|---|
| MS 500081 -1 | 8736308 |

APPROVED 4 MAY 1967 REVISED (A) 15 JAN 85

| | | | |
|---|---|---|---|
| P. A. ARMY-AT<br>Other Cust | INTERNATIONAL INTEREST | TITLE<br>DOLLY, TRAILER CONVERTER, 15 TON, 4 WHEEL, MILITARY DESIGN, M354 | MILITARY STANDARD<br>MS500081(AT) |
| PROCUREMENT SPECIFICATION<br>MIL-D-45322 | SUPERSEDES: | | SHEET \| OF \| |

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.