
REVIEWER SYMBOLS: USER SYMBOLS:

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 6150

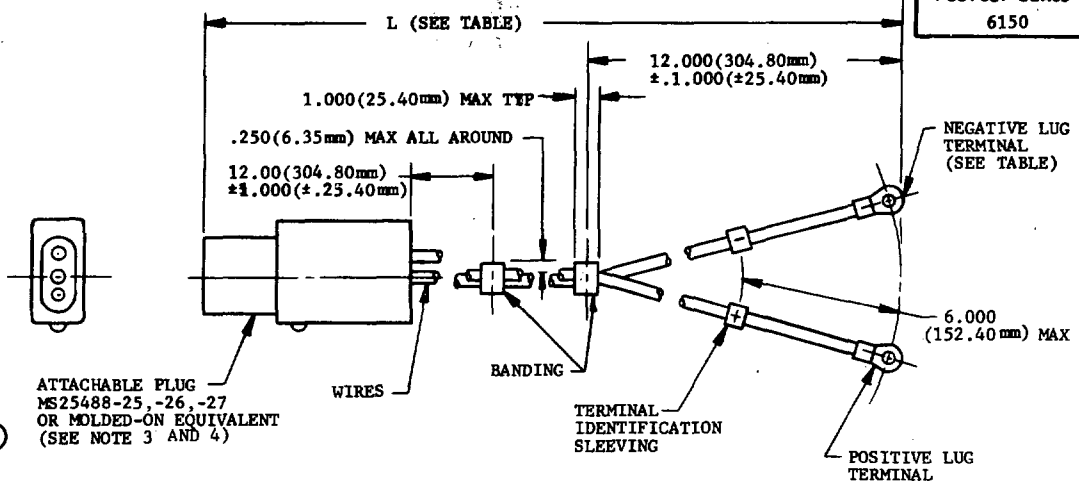

PART NO.	WIRE SIZE	TERMINALS		L FEET ±0.5 *	L METERS ±0.15 *	SUPERSEDES
		POSITIVE	NEGATIVE			
MS90347-7	0	MS20659-118	MS20659-135	20	6.10	AN2551C20 & MS25488-6 & MS90347-1
MS90347-8				30	9.14	AN2551C30 & MS25488-7 & MS90347-2
MS90347-9				40	12.19	MS25488-8
MS90347-10				60	18.29	MS25488-9
MS90347-11				80	24.38	MS25488-10
MS90347-12				100	30.48	MS25488-11
MS90347-13	00	MS20659-120	MS20659-136	20	6.10	AN2551D20 & MS25488-12 & MS90347-3
MS90347-14				30	9.14	AN2551D30 & MS25488-13 & MS90347-4
MS90347-15				40	12.19	MS25488-14
MS90347-16				60	18.29	MS25488-15
MS90347-17				80	24.38	MS25488-16
MS90347-18				100	30.48	MS25488-17
MS90347-19	0000	MS20659-123	MS20659-124	20	6.10	AN2551E20 & MS25488-18 & MS90347-5
MS90347-20				30	9.14	AN2551E30 & MS25488-19 & MS90347-6
MS90347-21				40	12.19	MS25488-20
MS90347-22				60	18.29	MS25488-21
MS90347-23				80	24.38	MS25488-22
MS90347-24				100	30.48	MS25488-23

* L SHALL BE 5 ±0.1 FEET (1.52 ±.03 METERS) FOR ALL QUALIFICATION TEST SAMPLES CABLE ASSEMBLIES.

NOTES:

1. MATERIAL: SEE PROCUREMENT SPECIFICATION.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.025 (±0.64mm).
3. MOLDED-ON PLUGS WHEN USED, SHALL MEET ALL THE REQUIREMENTS OF MS25488 EXCEPT THAT THEY SHALL BE MOLDED TO THE CABLES.

(C) 4. THE LAST IDENTIFIER OF THE PART NUMBER SHALL BE "A" TO INDICATE AN ATTACHABLE PLUG OR "M" TO INDICATE AN INTEGRALLY MOLDED PLUG.

(C) 5. INTEGRALLY MOLDED PLUGS. CABLE ASSEMBLIES WHICH ARE PROCURED FOR AIR FORCE ORIGINAL EQUIPMENT APPLICATION, SHALL ONLY BE INTEGRALLY MOLDED CABLE ASSEMBLIES.

(C) 6. ATTACHABLE PLUGS. AIR FORCE USE OF ATTACHABLE PLUGS SHALL BE LIMITED TO REPLACEMENT OF ORIGINAL MOLDED ASSEMBLY PLUGS DAMAGED IN SERVICE.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(C) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 7 AUG 64 REVISED (B) 21 AUG 75 (C) 31 AUG 78

P.A. NAVY - AS Other Cust ARMY - EL USAF - 11	TITLE CABLE ASSEMBLY EXTERNAL ELECTRIC POWER, AIRCRAFT, 28 VOLT DC OPERATING POWER	MILITARY STANDARD MS90347
PROCUREMENT SPECIFICATION MIL-C-7974	SUPERSEDES: SEE ABOVE TABLE	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 6150-0153 PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.