FED SUP CLASS
5315

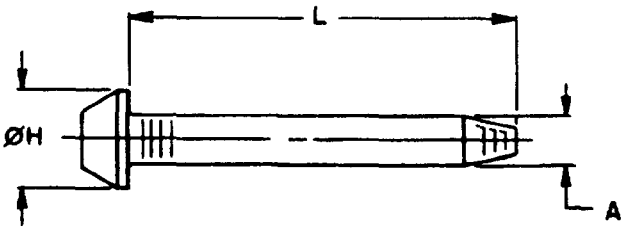



TABLE I. DASH NUMBERS AND DIMENSIONS

| SQUARE SPIKES | | | | |
|---|---|---|---|---|
| DASH NUMBER | A (SQUARE) | ØH | L | NO/100LBS (APPROX) |
| 1 | 375 | 6875 | 5 | 460 |
| 2 | 375 | .6875 | 6 | 374 |
| 3 | .375 | 6875 | 7 | 317 |
| 4 | 375 | 6875 | 8 | 277 |
| 5 | 500 | 1.000 | 9 | 147 |
| 6 | .500 | 1.000 | 10 | 131 |
| 7 | .500 | 1.000 | 12 | 106 |

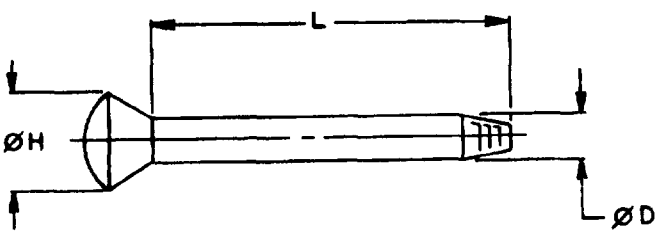



TABLE II DASH NUMBERS AND DIMENSIONS

| ROUND WIRE SPIKES | | | | | |
|---|---|---|---|---|---|
| DASH NUMBER | COMM DES | L | ØD | ØH | APPROX NO/LB |
| 8 | 40d | 5 | .2625 | .531 | 13 |
| 9 | 60d | 6 | 283 | 562 | 9 |
| 10 | | 7 | .312 | 625 | 7 |
| 11 | | 8 | 375 | 750 | 4 |

Ⓐ ENTIRE STANDARD REVISED

APPROVED 18 DEC 62 REVISED Ⓐ 25 JAN 88

REVIEWER ACTIVITIES (CIVIL AGENCIES COORDINATING ACTIVITIES) USER ACTIVITIES
ARMY-CE,ME GSA-FSS ARMY-AV, MI
NAVY-SA NAVY-AS,MC,SH
AIR FORCE-82

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

AMSC N/A

| PA | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY- AR<br>Other Cust<br>NAVY – YD<br>AIR FORCE-99 | | SPIKES; BARGE AND BOAT | MS90717 |
| PROCUREMENT SPECIFICATION<br>FF-N-105 | SUPERSEDES | | PAGE 1 OF 2 |

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0430

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5315

REQUIREMENTS

1 MATERIAL SQUARE SPIKES, TYPE V, STYLE 4, SHALL BE MANUFACTURED FROM WROUGHT IRON, COPPER SILICON ALLOY OR AUSTENITIC CORROSION-RESISTANT STEEL IN ACCORDANCE WITH THE PROCUREMENT SPECIFICATION ROUND WIRE SPIKES, TYPE V, STYLE 3, SHALL BE MANUFACTURED FROM STEEL WIRE IN ACCORDANCE WITH PROCUREMENT SPECIFICATION
CODE A - WROUGHT STEEL
CODE B - COPPER SILICONE ALLOY
CODE C - AUSTENTIC CORROSION-RESISTANT STEEL


2 CHARACTERISTICS. SQUARE SPIKES SHALL HAVE A CHISEL POINT, DIAMOND HEAD AND SMOOTH SQUARE SHANK ROUND WIRE SPIKES SHALL HAVE A CHISEL POINT, OVAL COUNTERSUNK HEAD AND SMOOTH ROUND SHANK.

3 PROTECTIVE COATING AND SURFACE TREATMENT SQUARE AND ROUND SPIKES MADE OF WROUGHT IRON OR STEEL WIRE SHALL BE ZINC COATED IN ACCORDANCE WITH ASTM B633, TYPE II, CLASS FE/ZN13, LUSTRE BRIGHT, AND AS CODED IN REQUIREMENT 5

4. MAGNETIC PERMEABILITY CORROSION-RESISTANT STEEL SHALL HAVE A MAGNETIC PERMEABILITY OF 2 0 MAXIMUM IN FIELDS OF 100 TO 200 OERSTEDS.

5. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER, A DASH NUMBER FROM TABLE I OR II, MATERIAL CODE LETTER, AND THE FINISH CODE LETTER "Z" FOR ZINC COAT WHEN SPECIFIED

EXAMPLE. MS90717-2A-Z




MS90717-2A-Z INDICATES- SQUARE, SPIKE 375 (SQUARE) 6 INCHES LONG, WROUGHT STEEL, ZINC COATED.

NOTES:

1 ALL DIMENSIONS ARE IN INCHES

2. IN THE EVENT OF CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE

3 REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN

APPROVED 18 DEC 62 REVISED (A) FOR CHANGES SEE PAGES 1 AND 2

REVIEWER ACTIVITIES (MIL AGENCIES COORDINATING ACTIVITIES)
ARMY-CE, ME
NAVY-SA
AIR FORCE - 82
GSA-FSS

USER ACTIVITIES
ARMY-AV, MI
NAVY-AS, MC, SH

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

| PA | INTERNATIONAL INTEREST | TITLE | MILITARY STANDARD |
|---|---|---|---|
| ARMY – AR<br>Other Cust<br>NAVY – YD<br>AIR FORCE-99 | | SPIKES; BARGE AND BOAT | MS90717 |
| PROCUREMENT SPECIFICATION<br>FF-N-105 | SUPERSEDES | | PAGE 2 OF 2 |

DD FORM 1 MAY 73 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5315-0430

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.