
NOTE: THIS DRAFT, DATED JUNE 1966 PREPARED BY WESO .IAS NOT BEEN APPROVED AND IS SUBJECT TO MODIFICATION. DO NOT USE PRIOR TO APPROVAL.

FED. SUP CLASS
5975

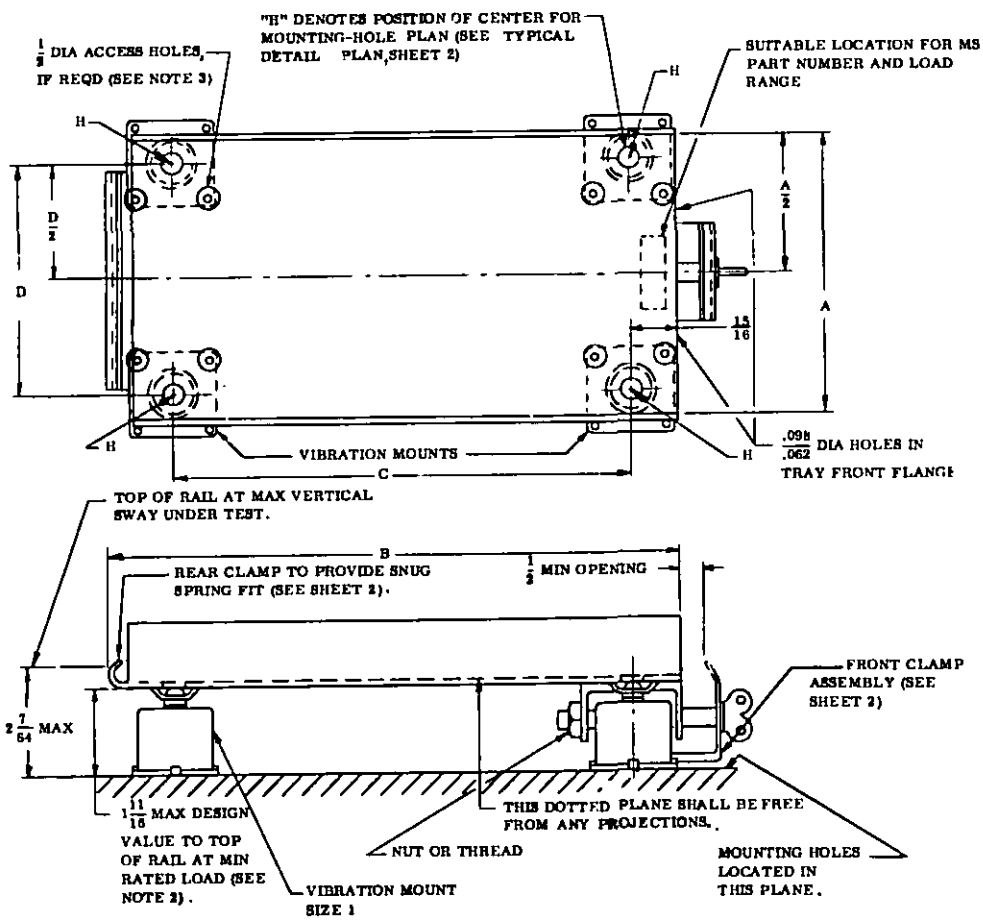

MS PART NUMBER 1/	DIMENSIONS				LOAD RANGE (POUNDS)
	A	B	C	D	
MS91404-S1	5-3/16	10-1/8	8-1/4	4-1/4	6 TO 12
MS91404-S2	4-15/16	13-5/16	11-5/8	4-1/4	10 TO 22

1/ THE MS PART NUMBER CONSISTS OF THE MS MILITARY-STANDARD NUMBER FOLLOWED BY A DASH NUMBER. THE DASH NUMBER INDICATES BASES THAT ARE DESIGNED TO HOLD CASES HAVING THE SAME DASH NUMBER. FOR EXAMPLE, A MS91404-S1 BASE WILL HOLD A MS91402-S1 CASE.

(D) ENTIRE STANDARD REVISED AND REDRAWN

APPROVED 16 DEC 1953 — REVISED (A) 29 APR 1954 — (B) 11 SEPT 1956 — (C) 8 DEC 1958 — (D) 20 OCT 1966

Users: ARMY, NAVY - MC, DG, AIR FORCE

Reviewers: ARMY - EL, MU, MI; NAVY - AS; AIR FORCE - 11, 85

Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.


P.A. NAVY - AS Other Cust ARMY - EL USAF - 11	TITLE BASES, MOUNTING, SMALL-SIZE (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)	MILITARY STANDARD MS91404
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:42Z
Check the source to verify that this is the current version before use.

NOTE: THIS DRAFT, DATED JUNE 1956 BY WESD HAS NOT BEEN APPROVED AND IS SUBJECT TO MODIFICATION. DO NOT USE PRIOR TO APPROVAL.

FED. SUP CLASS
5975

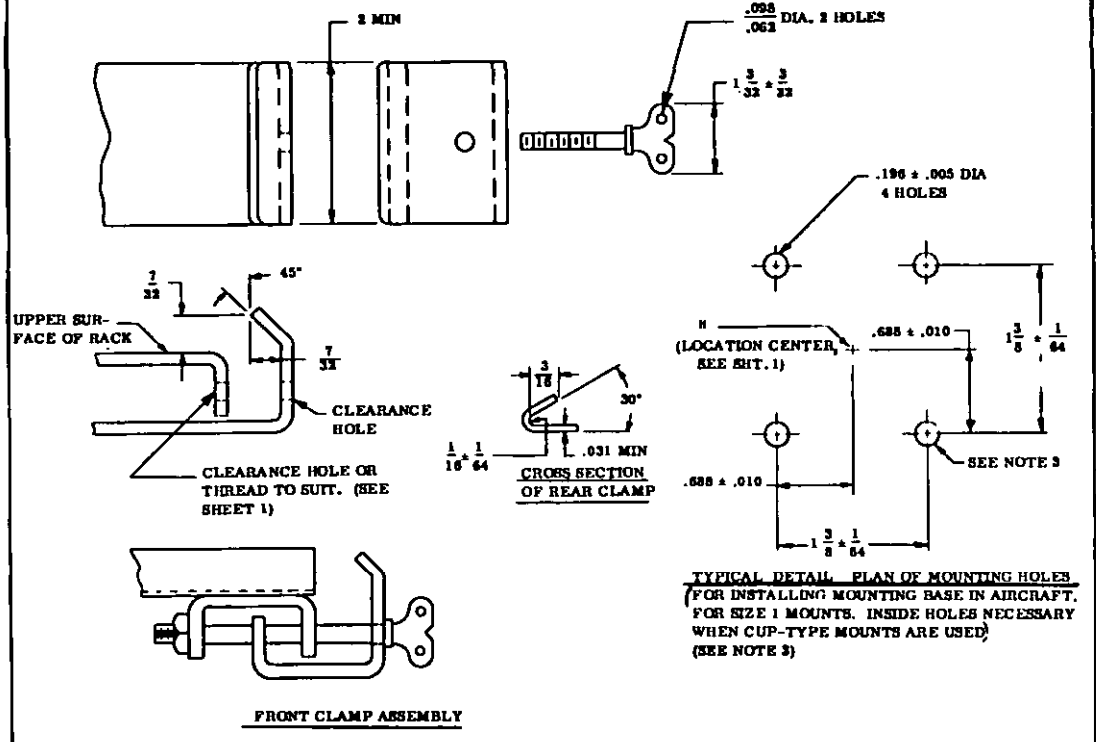

NOTES:

1. ALL DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: FRACTIONS ± 1/32, DEGREES ± 1/2°. INTERPRET DRAWING IN ACCORDANCE WITH MIL-STD-8.
2. THE MANUFACTURER'S RATED LOADED HEIGHT IS NOT TO EXCEED THE SPECIFIED MAXIMUM DESIGN VALUE. THE MEASURED LOADED HEIGHT OF THE MOUNTING BASE AT MINIMUM RATED LOAD IS THE MANUFACTURER'S RATED LOADED HEIGHT ±3/64.
3. PROVIDE AS MANY MOUNTING HOLES, IN THE LOCATION SHOWN, AS MAY BE NECESSARY FOR SWAY SPACE.
4. A MINIMUM OF TWO JUMPERS, PREFERABLY LOCATED AT DIAGONAL CORNERS AND AT THE EXTREME END OF THE BASES, SHOULD BE PROVIDED.
5. LATERAL SWAY SPACE NOT APPLICABLE.
6. QUALIFICATION INSPECTION REQUIRED
7. ALL MOUNTING BASES INCLUDE VIBRATION INSULATING ELEMENTS DESIGNED IN ACCORDANCE WITH MIL-C-172, CLASS A.
8. FOR AUTOMATIC LOCKING DEVICES SEE PROCUREMENT SPECIFICATION.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 DEC 1953 REVISED (A) 29 APR 1954 (B) 11 SEPT 1956 (C) 6 DEC 1956 (D) FOR CHANGES, SEE SHT. 1 and 2.

Reviewers: ARMY - EL, MU, MI; NAVY - AS; AIR FORCE - 11, 85
Users: ARMY; NAVY - MC, DG; AIR FORCE

Review/user information is current as of the date of this document. For future coordination of changes to this document draft circulation should be based on the information in the current DODISS.

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY - EL USAF-11	TITLE: BASES, MOUNTING, SMALL-SIZE (FOR USE WITH ELECTRONIC EQUIPMENT IN AIRCRAFT)	MILITARY STANDARD MS91404
PROCUREMENT SPECIFICATION MIL-C-172	SUPERSEDES:	SHEET 2

DD FORM 1 SEP 57 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:42Z
Check the source to verify that this is the current version before use.