
MILITARY SPECIFICATION SHEET

LIGHT, AIRCRAFT WARNING, RED, 120 VOLTS, 90 WATTS, SIX LAMPS, SYMBOL 160.1

This specification sheet is approved for use by the Naval Sea Systems Command, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the light described herein shall consist of this specification and the latest issue of MIL-L-24560(SH).

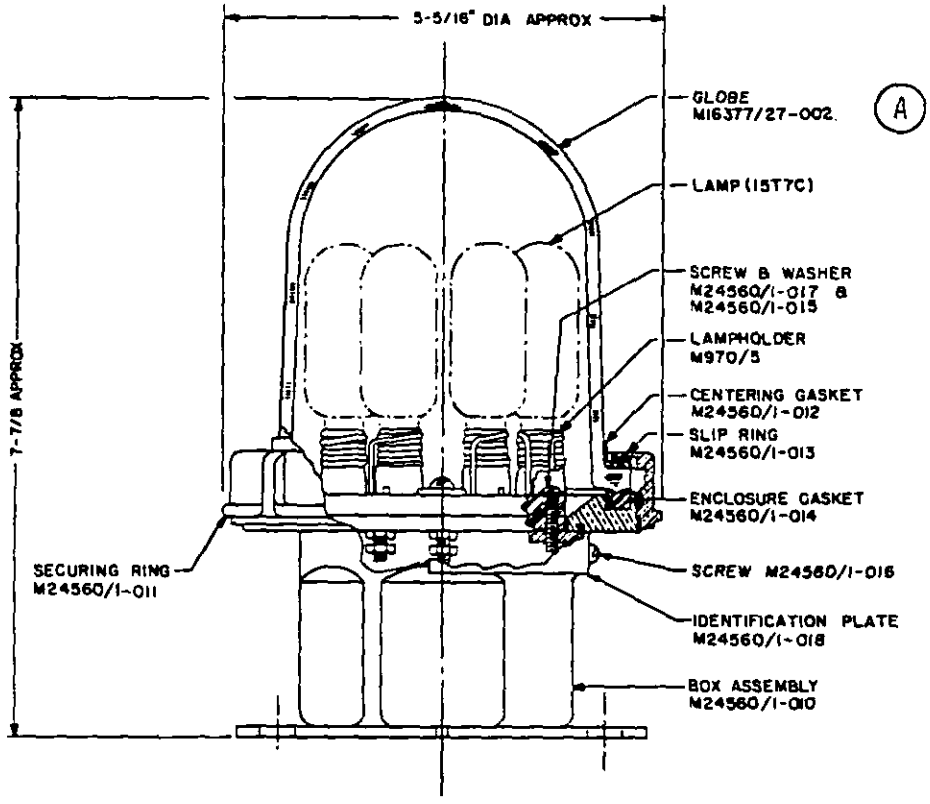

SH11408


M24560/1-001
ASSEMBLY, AIRCRAFT WARNING SYM 160.1

All dimensions in inches.
For tolerances, other than specified herein, see paragraph 3.4.1.1 of MIL-L-24560.

(A) denotes changes

FSC 6220


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:54Z
Check the source to verify that this is the current version before use.

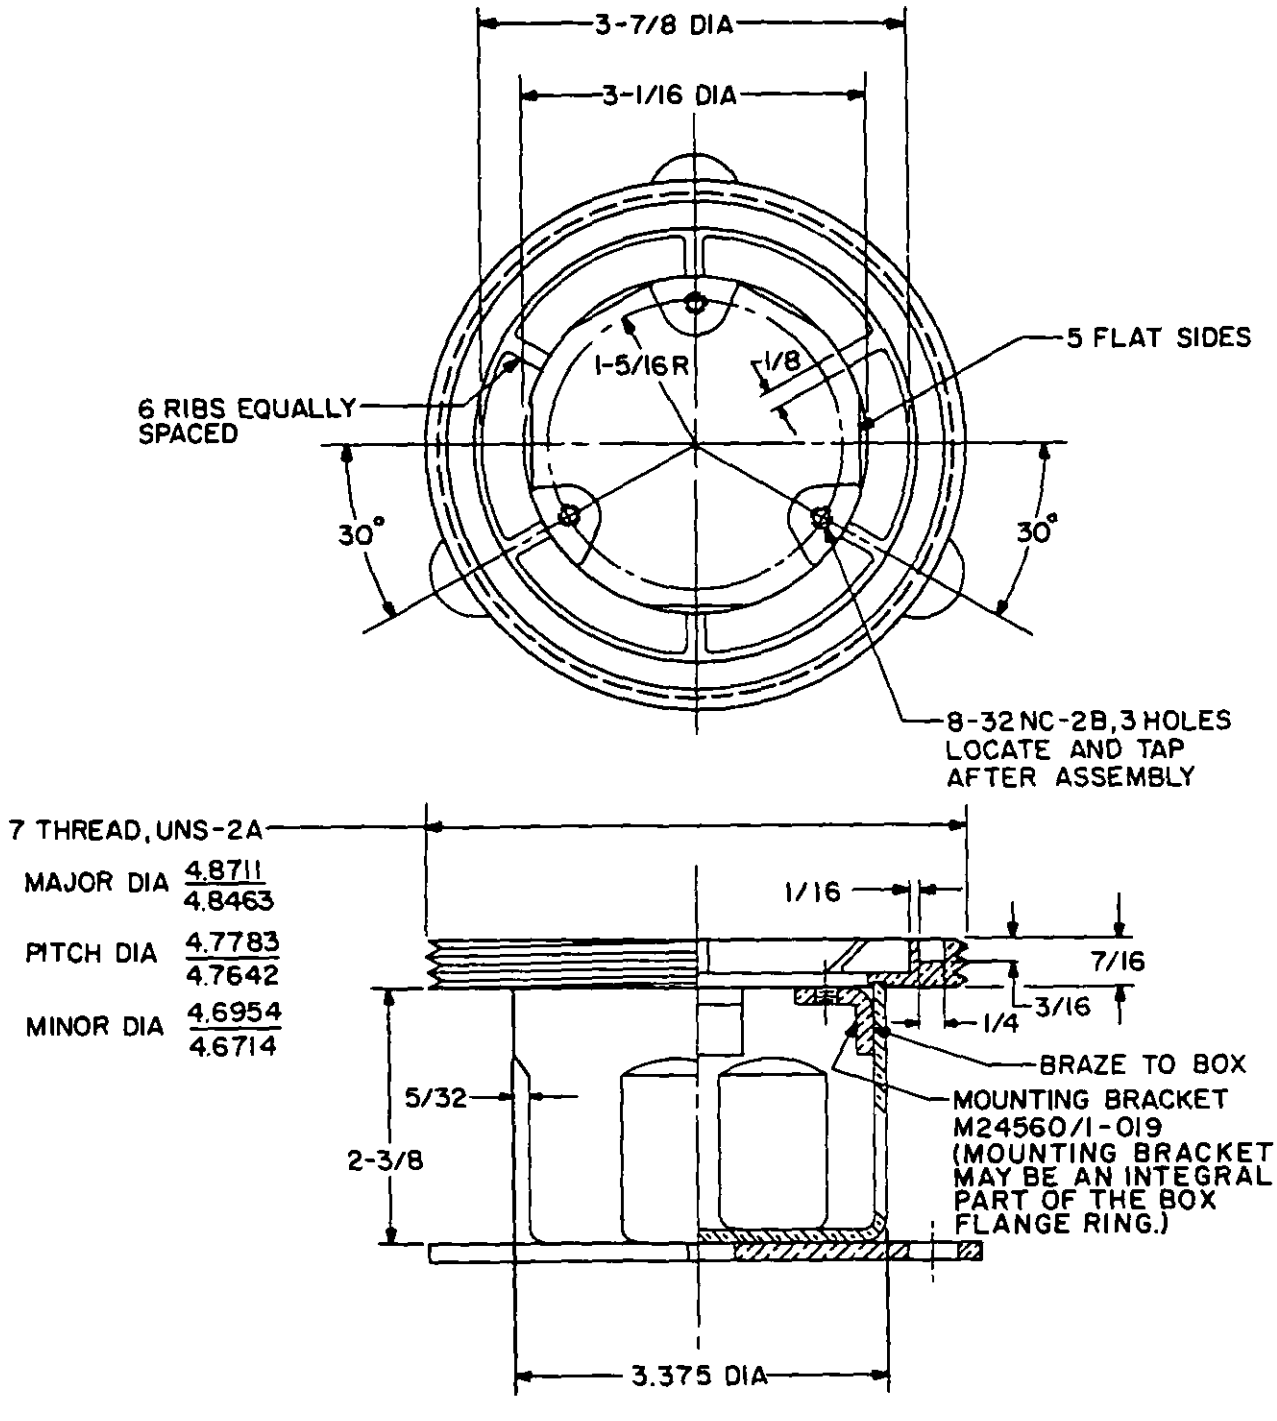

M24560/1-010
BOX ASSEMBLY

SH11408-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T22:54Z
Check the source to verify that this is the current version before use.

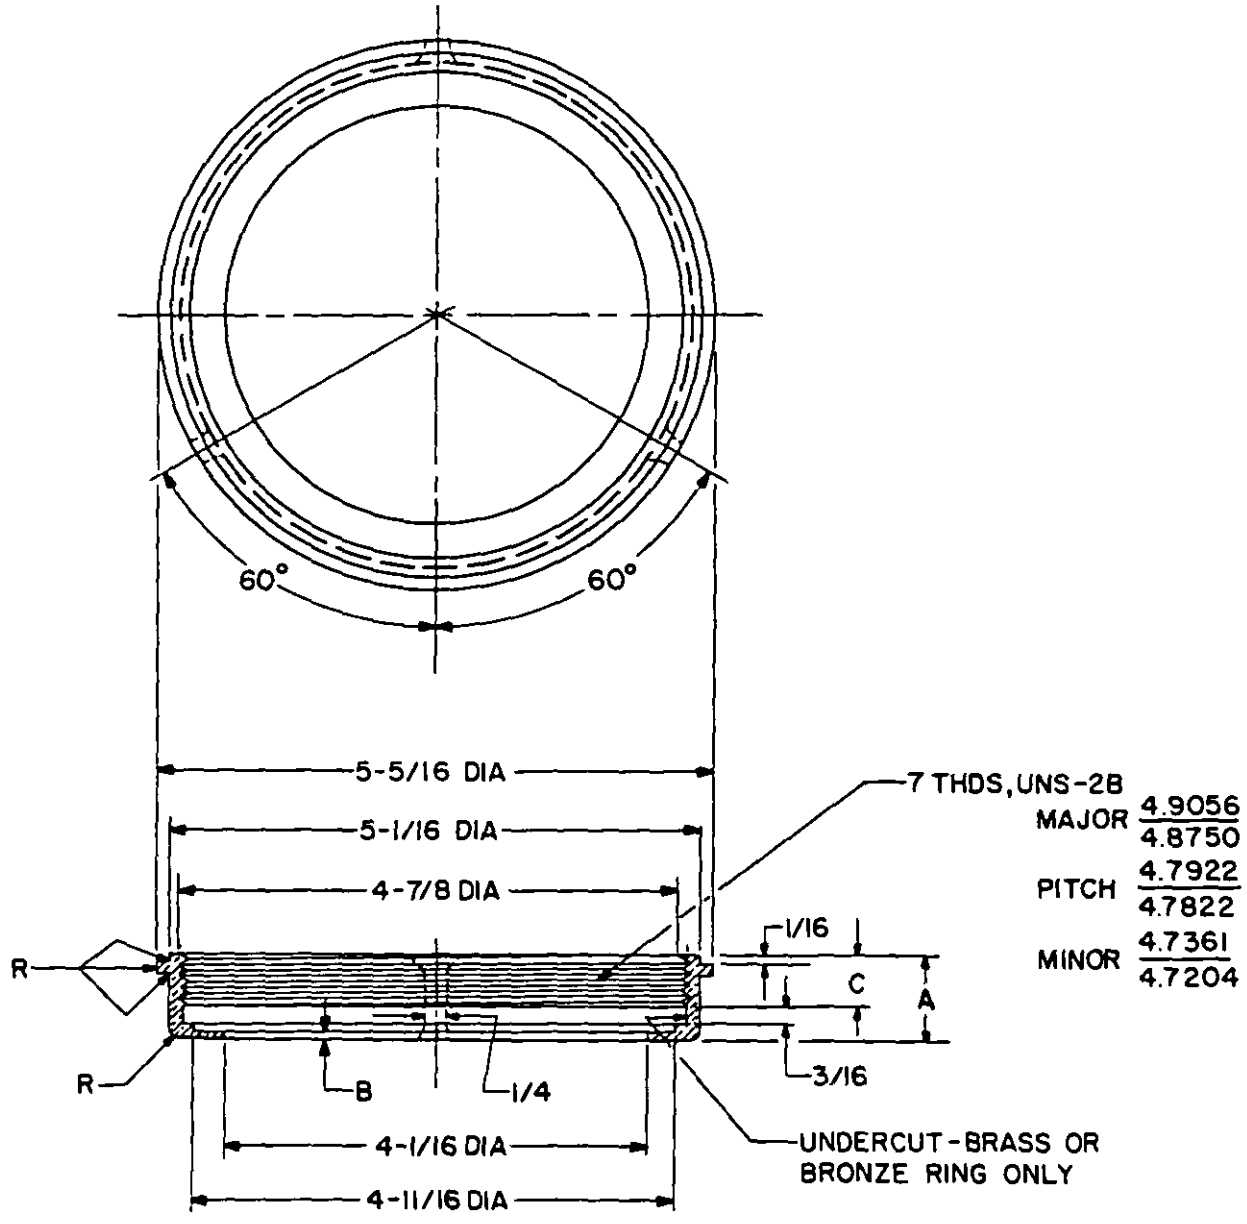


M24560/1-011
SECURING RING

DIMENSION	BRONZE OR BRASS RING	PLASTIC RING
A	13/16	1.190
B	1/16	0.190
C	7/16	0.800


SH11408-2


Source: https://assist.dla.mil -- Downloaded: 202610-19T22:54Z
Check the source to verify that this is the current version before use.

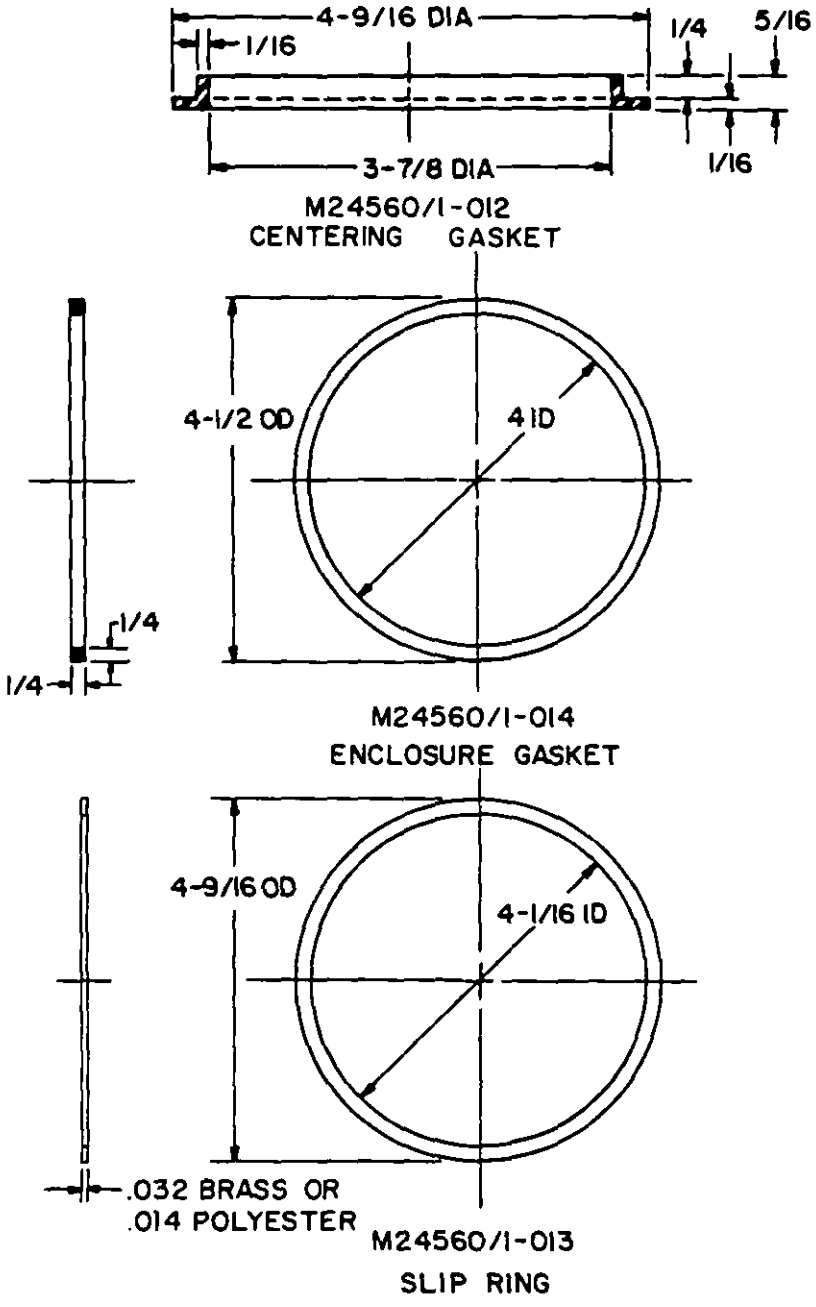


SH11408-3

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:54Z
Check the source to verify that this is the current version before use.

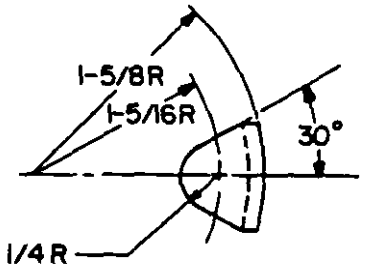




M24560/1-019
MOUNTING BRACKET

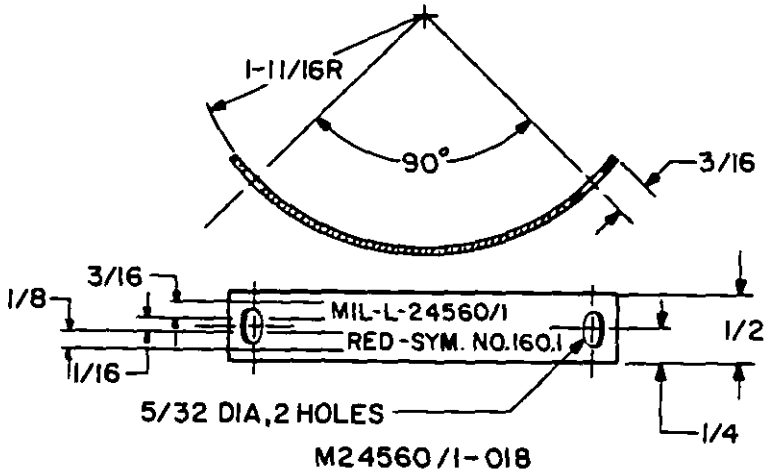

M24560/1-018
IDENTIFICATION PLATE

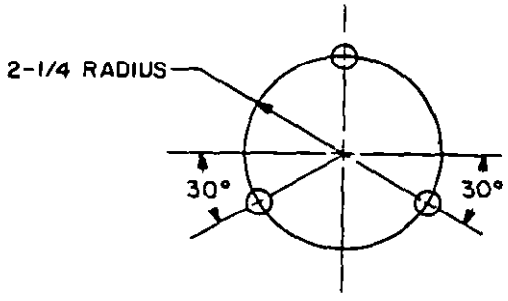

SH11408-4

MOUNTING BOLTS SHALL BE 3/8-16 HEX. HD.
MOUNTING DIMENSIONS

Source: https://assist.dla.mil -- Downloaded: 202640-19T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

DESIGN:
Electrical rating: 120 volts, 60 Hertz, 90 watts
Dimensions and configuration: See figures
Enclosure: Splashproof (type I)
Parts: See table I
First article: Examination of product, magnetic permeability, operation, dielectric withstanding voltage, vibration, shock, salt spray, degree of enclosures.

GENERAL INFORMATION: Assignment of Military part numbers and general information is as follows:

a. Military part number: M24560/1-001 - (Light assembly - sym 160.1).
b. Supersedes NAVSHIPS Drawing S6401-74231.
c. Weight: The weight of this light assembly shall be 4.5 pounds, maximum.

TABLE I. Parts.

Part number 1/	Part name	Quantity	Specification	Additional information
M24560/1-010	Box assembly	1	QQ-B-613	Brass
M24560/1-011	Securing ring	1	QQ-B-728	Bronze
M24560/1-012	Gasket - centering	1	COML	Neoprene
M24560/1-013	Slip ring	1	COML	Brass or polyester
M24560/1-014	Gasket - enclosure	1	COML	Neoprene
M24560/1-015	Washer, lock	3	COML	Phosphor bronze #8
M24560/1-016	Screw, mach R.H.	2	COML	Brass #6-32 NC-2 x 3/4 LG
M24560/1-017	Screw, mach R.H.	3	COML	Brass #8-32 NC-2 x 3/4 LG
M24560/1-018	Identification plate	1	MIL-P-15024	AL, type H, normal service of MIL-P-15024/5
M24560/1-019	Mounting bracket	3	QQ-B-613	Brass
	Lamp	6	COML	15T7C
M970/5-1	Lampholder	1	MIL-L-970/5	
(A) M16377/27-002	Globe	1	MIL-F-16377/27	Red

1/ Part numbers M24560/1-010 through M24560/1-019 were assigned for reference purposes only.

Preparing activity:
Navy - SH
(Project 6220-N295)

Source: https://assist.dla.mil -- Downloaded: 202610-19T22:54Z
Check the source to verify that this is the current version before use.