REVIEW ACTIVITY : DCSC, 69
USER ACTIVITY : YD, ATAC

This Military Standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
2605

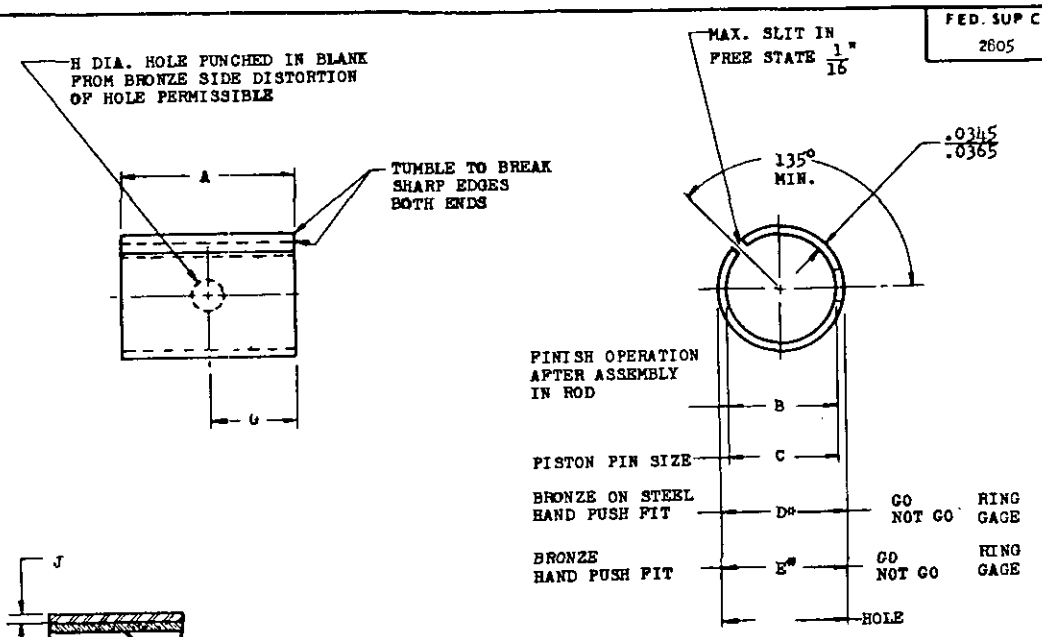

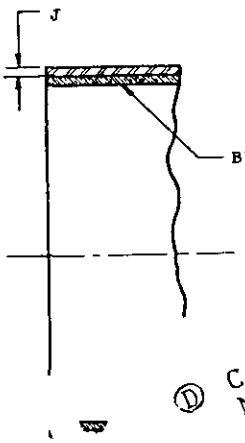

ENLARGED

Ⓓ CANCELED AFTER 22 APRIL 1982
NO SUPERSEDING STANDARD

DASH NUMBER	A	B	C	D*	E*	F	G	H	J
-1	1.17 1.19	.8593 .8596	.8591 .8593	.9165 .9185	.9175 .9195	.913 .914	.59	.219	.0175 .0197
-2	1.302 1.322	.9901 .9904	.9901 .9899	1.0470 1.0490	1.0480 1.0500	1.044 1.045	.66	.219	.0175 .0197
-3	1.292 1.312	1.1151 1.1154	1.1149 1.1151	1.1725 1.1745	1.1735 1.1755	1.169 1.170	.66	.219	.0175 .0197
-4	.790 .810	.5436 .5438	.5433 .5435	.6000 .6015	.6005 .6020	.597 .598	.40	.156	.017 .020
-5	.865 .885	.6403 .6405	.6400 .6402	.6965 .6980	.6970 .6985	.6935 .6945	.44	.156	.017 .020

* THESE DIMENSIONS ARE LIMITING RING GAGE DIMENSIONS, UPPER DIMENSION INDICATES "NOT GO", LOWER DIMENSION INDICATES "GO" GAGE DIAMETER.

Ⓒ ENTIRE STANDARD REVISED

APPROVED 19 JUNE 1952 REVISED Ⓐ 27 NOVEMBER 1953 Ⓑ 24 OCTOBER 1955 Ⓒ 7 MAR 1966 Ⓓ 22 APRIL 1982

P.A.ARMY NO(ERDL)	TITLE	MILITARY STANDARD
Other Cust A.Y. - 69 NAVY - YD	BEARING, SLEEVE: ENGINE, PISTON PIN	MS 13963
PROCUREMENT SPECIFICATION MIL- E- 11275	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:31Z
Check the source to verify that this is the current version before use.