
FED. SUP CLASS 5930

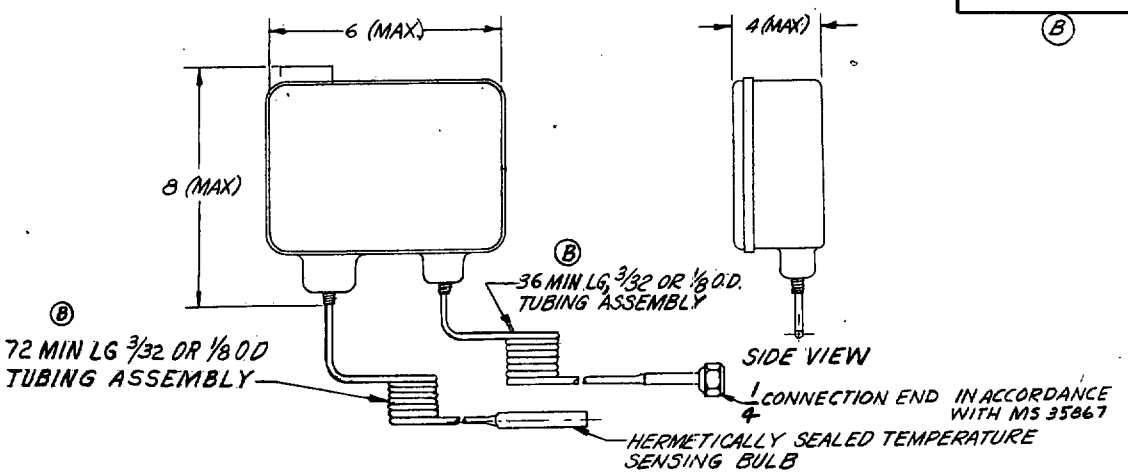

FRONT VIEW

DASH NUMBER	ELECTRICAL CHARACTERISTICS	TEMPERATURE CONTROL		HIGH PRESSURE SAFETY CUT-OUT		
		RANGE MIN. CUT-OUT TO MAX. CUT-IN	DIFFERENTIAL	RANGE ±25 PSIG	CUT-IN DIFFERENTIAL	TYPE OF RESET
— 1.	120/240V, 50 TO 60 HERTZ	-10F TO 55F	5F TO 20F TOP OF RANGE	100 TO 425 PSIG	30 TO 55 PSI BELOW CUT-OUT SETTING	AUTOMATIC
— 2.	24V, D.C.	-10F TO 55F				
— 3.	120/240V, 50 TO 60 HERTZ	50F TO 90F	5 F TO 30 F BOTTOM OF RANGE		NONE	MANUAL
— 4.	24V, D.C.	50F TO 90F				

NOTES

1. FOR USE WITH DICHLORODIFLUOROMETHANE (CCl_2F_2), R-12 REFRIGERANT
2. SUITABLE FOR OUTDOOR USE, EXCEPT SHIPBOARD.
3. SWITCHES ARE SINGLE POLE, SINGLE THROW. FOR TEMPERATURE CONTROL, CONTACTS OPEN AT LOW TEMPERATURES AND CLOSE AT HIGH TEMPERATURES. FOR HIGH PRESSURE SAFETY CUT-OUT, CONTACTS OPEN AT HIGH PRESSURES AND CLOSE AT LOW PRESSURES.
4. CONTROLS HAVE GRADUATED SCALES FOR MAKING SETTINGS.
5. DASH NOS. 1 AND 3 MAY BE USED FOR DIRECT CONTROL OF MOTORS WITH A MAXIMUM LOAD OF 13.0 AMPS AT 115 VOLTS AND 6.5 AMPS AT 230 VOLTS. FOR LOADS EXCEEDING THESE RATINGS, DASH NOS. 1 AND 3 ARE FOR PILOT DUTY. DASH NOS. 2 AND 4 ARE FOR PILOT DUTY ONLY.
6. DIMENSIONS IN INCHES.
7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCES HEREIN.
8. REFERENCED DOCUMENTS SHALL BE THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BIDS OR REQUEST FOR PROPOSAL.
9. PART NUMBERS: THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER. EXAMPLE: MS 17844-1.

This Military Standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Review: MD
User: Army - CE; Navy - MC; DSA - GS

APPROVED 16 MAY 1962 REVISED (A) 25JULY1968 (B) 16 MAY 1975

P.A. ARMY - GL Other Cust NAVY - YD USAF - 82	TITLE CONTROL, TEMPERATURE, REFRIGERANT -12; — WITH HIGH PRESSURE CUT-OUT	MILITARY STANDARD MS 17844
PROCUREMENT SPECIFICATION MIL-C-23292	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:10Z
Check the source to verify that this is the current version before use.