
FED. SUP CLASS
6640

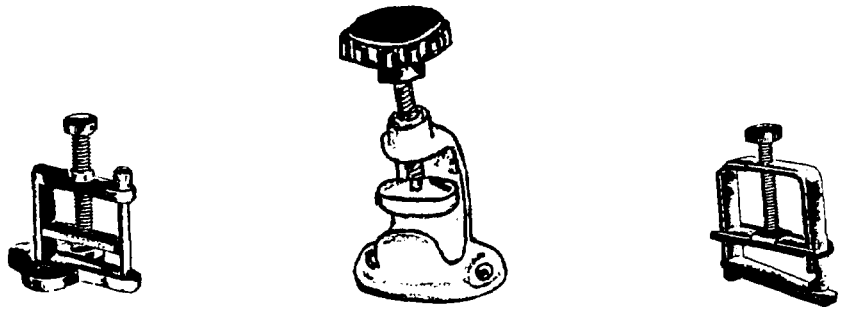

PART NUMBER	NOMINAL DIMENSIONAL DATA (mm)		TYPE OF OPENING
	MAX OD TUBING ACCOMMODATED	HEIGHT EFFECTIVE OPENING	
MS36003-1	17	17	Side
MS36003-3	25	25	Side
MS36003-4	19	19	Swivel Jaw
MS36003-5	25	25	Swivel Jaw

MATERIAL: MS36003-1 and MS36003-3 shall be of aluminum base alloy in accordance with Federal Specification QQ-A-591 composition A180 or zinc-base alloy in accordance with Federal Specification QQ-Z-363, composition AG40A, with a nickel plated finish. Compressor screw and adjustable keeper arm of -1 shall be of brass rod in accordance with Federal Specification QQ-B-626, with a nickel plated finish. MS36003-4 shall be brass in accordance with Federal Specification QQ-B-613, composition 1 or 2, with a nickel plated finish.

DESIGN: Thread design shall be in accordance with Federal Handbook H28, Unified National Coarse Thread Series. MS36003-1 shall have a side opening controlled by an adjustable keeper arm with knurled head. Compressor screw shall be centrally located. Clamp bottom shall be flanged and have two countersunk screw holes for attaching to an extraneous object such as a table.

MS36003-3 shall consist of a compression screw and an adjustable bar and a stationary curved section. The base shall have two countersunk holes for attachment to bench top. Max overall height - 115 mm.

MS36003-4 shall be designed so that the lower jaw will swing open to permit tubing to be inserted without disconnecting apparatus to which it is attached. Compression screw shall be centrally located.

NOTES:
1. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.
2. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.
4. FSCM: 11273, 22527, 59728, and 64484.

© ENTIRE STANDARD REVISED

P.A.	EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	MS 99		CLAMP, RUBBER TUBING, REGULATING, SCREW-COMPRESSOR TYPE	MS36003
Procurement Specifications NNN-C-435		SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PART NUMBER 6640-1205

APPROVED 23 Dec 1959 REVISED (A) 15 Dec 1967 (B) 6 Oct 1975 (C) 4 OCT 1983

USER ACTIVITIES: ARMY - MD, DM NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME AIR FORCE - 82

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:32Z
Check the source to verify that this is the current version before use.