


FED. SUP CLASS
6640

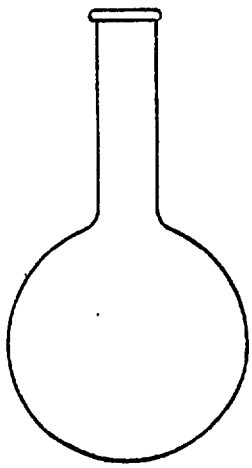

BEADED OR TOOLED RIM



RING NECK

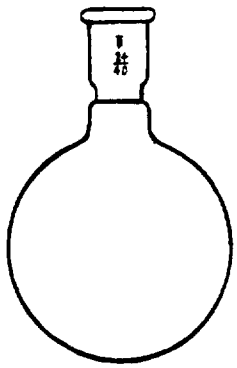

GROUND JOINT

PART NUMBER	CAPACITY (ml)	NECK STYLE	MOUTH DATA		
			STYLE	STOPPER SIZE ACCOMMODATED	GROUND JOINT SIZE
MS36035-2	50	long	beaded or tooled rim	1	
MS36035-13	50	short	ground joint		24/40
MS36035-3	100	long	beaded or tooled rim	2	
MS36035-4	100	short	ground joint		24/40
MS36035-5	200	long	beaded or tooled rim	4 or 5	
MS36035-6	250	short	ground joint		24/40
MS36035-7	500	long	beaded or tooled rim	4 or 6	
MS36035-14	500	long	ground joint		24/40
MS36035-8	500	short	ring neck	6	
MS36035-9	500	short	ground joint		24/40
MS36035-10	1000	short	ring neck	8	
MS36035-11	1000	short	ground joint		24/40
MS36035-12	2000	short	ring neck	10	
MS36035-15	1000	long	ground joint		24/40

(B) MS36035-1 cancelled without replacement

USER ACTIVITIES: NAVY - MC
ARMY - ME, PS
NAVY - AS, OS, YD
ARMY - MU

APPROVED 29 Jun 1960 REVISED (A) 15 Aug 1969 (B) 1 Aug 1974

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	EA	TITLE	MILITARY STANDARD
Other Cust	MS 82	FLASK, BOILING round bottom	MS 36055
PROCUREMENT SPECIFICATION None	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6640

REVIEW ACTIVITIES: ARMY - MD
NAVY - AS, OS, YD
USER ACTIVITIES: ARMY - ME, PS
NAVY - MC

MATERIAL: Borosilicate glass in accordance with Federal Specification DD-G-541, Type I, Class A.

DESIGN: Flask shall be spherical with a round bottom.

Each flask shall have a marking area located in accordance with commercial practice.

Each flask shall be permanently and legibly marked with manufacturer's name or trademark and capacity.

Mouths shall be designed to accommodate standard rubber stoppers specified in Federal Specification ZZ-S-751.

Mouths designed to accommodate ground joints shall be in accordance with Federal Specification DD-G-675, Type I, Composition 1, Grade A.

NOTES:
1. Flasks are not supplied with stoppers.
2. Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bid.

APPROVED 29 Jun 1960 REVISED (A) 15 Aug 1969 (B) 1 Aug 1974

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	EA	TITLE	MILITARY STANDARD
Other Cust	MS 82	FLASK, BOILING round bottom	MS 36055
PROCUREMENT SPECIFICATION None		SUPERSEDES:	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U.S. GOVERNMENT PRINTING OFFICE: 1974—603-109/1260

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:33Z
Check the source to verify that this is the current version before use.