

FED. SUP CLASS
2350

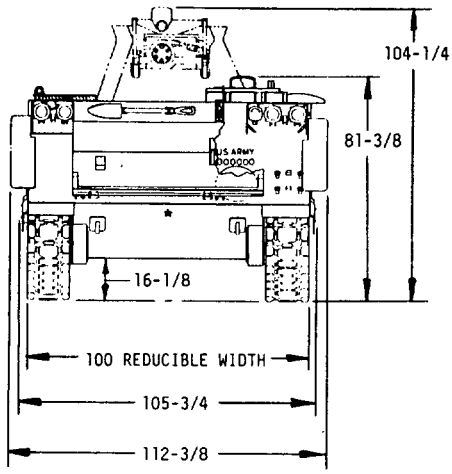

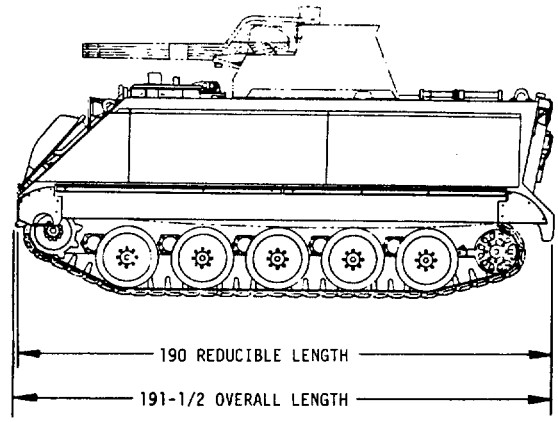

VEHICLE CHARACTERISTICS

WEIGHT:
- COMBAT LOADED 27,478 LBS
- CURB 26,518 LBS

ENGINE:
- 318 CU IN V6 210 HP @ 2800 RPM

TRANSMISSION:
- 3 SPEEDS FWD, 1 SPEED REVERSE

PERFORMANCE:
- MAX VEH SPEED; FWD 40 MPH
- REVERSE 9.2 MPH
- FUEL CONSUMPTION 1.98 MPG
- CRUISING RANGE 300 MI APPROX
- MAX GRADE ABILITY
- ASCENDING 60%
- DESENDING 60%
- MAX SIDE SLOPE ABILITY 30%
- MAX FORDING DEPTH UNLIMITED
- VERT OBSTACLE ABILITY (FWD) 24 INCHES
- MAX TRENCH CROSSING ABILITY 66 INCHES
- MAX WATER SPEED 3.6 MPH

ARMAMENT:
- AA CANNON, 20MM XM-168
- MOUNT XM-157
- LEAD SIGHT, AUTOMATIC COMPUTING XM-61

AMMUNITION: 20MM 2000 ROUNDS

BASIC DATA REQD WITH VEHICULAR DWG:
- VEH SPEC MIL-C-62310
- PROCEDURE, FINISH, FINAL PROTECTIVE 10863397
- PRODUCTION LUBRICATION CHART 10942803
- ON VEHICLE EQUIPMENT (OVE) 12268675
- PREPARATION FOR STOR AND SHPT MIL-C-62074
- TRANSPORTABILITY DATA 11660747

PERSONNEL CAPACITY: (DRIVER INCLUDED) 4

RADIO: (OVE) 8750030

SPECIAL PURPOSE KITS/ACCESSORIES:
(INSTALLATION DOES NOT REQUIRE VEHICLE MODIFICATION)
- HEATER KIT, CREW COMPARTMENT 12268875
- HEATER KIT, ENGINE COOLANT 12269227
- WINDSHIELD KIT, DRIVER 11589494

SPECIAL MAINTENANCE TOOL REFERENCE:
- TOOL KIT, TRACKED VEHICLE (ORGANIZATIONAL MAINTENANCE, SET A) 10944497
- TOOL KIT TRACKED VEHICLE (ORGANIZATIONAL MAINTENANCE, SET B) 10944498
- TOOL KIT, TRACKED VEHICLE (DIRECT SUPPORT MAINTENANCE) 10944499
- TOOL KIT, TRACKED VEHICLE (GENERAL SUPPORT MAINTENANCE) 10944500
- TOOL KIT, TRACKED VEHICLE (DEPOT MAINTENANCE) 10944501

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000

APPROVED 3 JUL 85 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52208-1	8750030

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE CHASSIS, WEAPON FULL TRACKED M741A1	MILITARY STANDARD MS52208(AT)
PROCUREMENT SPECIFICATION MIL-C-62310	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is abailable for use by all Departments and Agencies of the Department of defense.
DISTRUBUTION STATEMENT A. Approved for public release; distrubution is unlimited.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.