

FED. SUP CLASS
2350

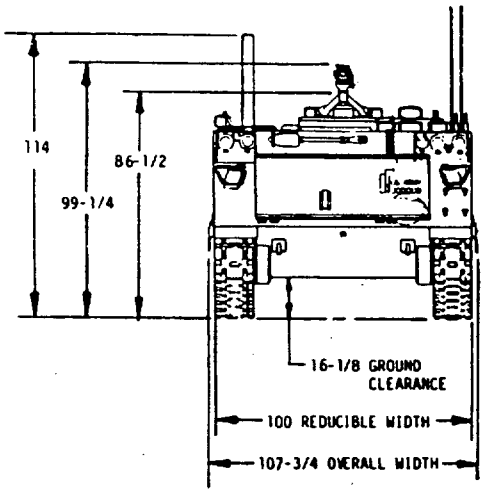

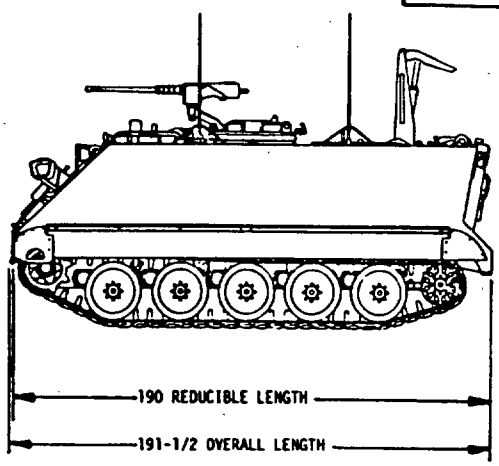

VEHICLE CHARACTERISTICS

WEIGHT:

COMBAT LOADED	25,550 LBS
NET	22,830 LBS

ENGINE:

318 CU IN V6 212 HP @	2800 RPM

TRANSMISSION:
3 SPEEDS FWD, 1 SPEED REVERSE

PERFORMANCE:

MAX VEH SPEED: FWD	42 MPH
REVERSE	9.2 MPH
FUEL CONSUMPTION	1.98 MPG
CRUISING RANGE	300 MI APPROX
MAX GRADE ABILITY	
ASCENDING	60%
DESENDING	60%
MAX SIDE SLOPE ABILITY	30%
MAX FORDING DEPTH	UNLIMITED
VERT OBSTACLE ABILITY (FWD)	24 INCHES
MAX TRENCH CROSSING ABILITY	66 INCHES
MAX WATER SPEED	3.6 MPH

ARMAMENT:

GUN MACHINE	50 CAL
AMMUNITION	2000 ROUNDS

BASIC DATA REQD WITH VEHICULAR DWG:

VEH SPEC	MIL-C-62310
PROCEDURE, FINISH, FINAL PROTECTIVE	10863397
PRODUCTION LUBRICATION CHART	10942803
ON VEHICLE EQUIPMENT (OVE)	10932800
PREPARATION FOR STOR AND SHPT	MIL-C-45360
TRANSPORTABILITY DATA	11677889

PERSONNEL CAPACITY: (DRIVER INCLUDED) 4

RADIO: AN/GRC

SPECIAL PURPOSE KITS/ACCESSORIES:
(INSTALLATION DOES NOT REQUIRE VEHICLE MODIFICATION)

HEATER KIT, VEHICULAR COMPARTMENT	12268716
HEATER KIT, ENGINE COOLANT	11661080
LITTER KIT	10866194
WINDSHIELD KIT, DRIVER	11589494
SHOCK MOUNTED CBR KIT REQUIRES:	
1. CBR KIT (M8A3 TANK GAS-PARTICULATE FILTER)	MIL-F-51069
2. SHOCK MOUNT KIT	5703654
3. INSTALLATION	11598761
SHIELD KIT, MACHINE GUN	11660854
SPECIAL MAINTENANCE TOOL REFERENCE:	
TOOL KIT, TRACKED VEHICLE (ORGANIZATIONAL MAINTENANCE, SET A)	10944497
TOOL KIT TRACKED VEHICLE (ORGANIZATIONAL MAINTENANCE, SET B)	10944498
TOOL KIT, TRACKED VEHICLE (DIRECT SUPPORT MAINTENANCE)	10944499
TOOL KIT, TRACKED VEHICLE (GENERAL SUPPORT MAINTENANCE)	10944500
TOOL KIT, TRACKED VEHICLE (DEPOT MAINTENANCE)	10944501
SHOCK MOUNTED CBR KIT REQUIRES:	
1. CBR KIT (M8A3 TANK GAS-PARTICULATE FILTER)	FSN 4240-853-3201
2. SHOCK MOUNT KIT	5703654
3. INSTALLATION	11598761
CRANE	11646791
WINCH	10934878

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48397-5000

APPROVED 20 OCT 86 REVISED

MS PART NO.	ENGINEERING DRAWING NO.
MS52275-1	8736888

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE: RECOVERY VEHICLE, LIGHT, M806E1	MILITARY STANDARD MS52275(AT)
PROCUREMENT SPECIFICATION	SUPERSEDES:		SHEET 1 OF 1

DD FORM 572-1 (LIMITED COORDINATION) PREVIOUS EDITION OF THIS FORM ARE OBSOLETE. 2350-A366

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

U.S. GOVERNMENT PRINTING OFFICE: 1986 - 704-036/70004

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:24Z
Check the source to verify that this is the current version before use.