DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

NOTE: This drawing was approved by joint action of the Air Force and Navy Departments as the Air Force-Navy standard for this product. This drawing supersedes all predecessor standard drawings for the same product and shall become effective for the procurement of aeronautical supplies or for use in new designs not later than 6 months after the latest date of approval shown.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

FED. SUP CLASS.
5307

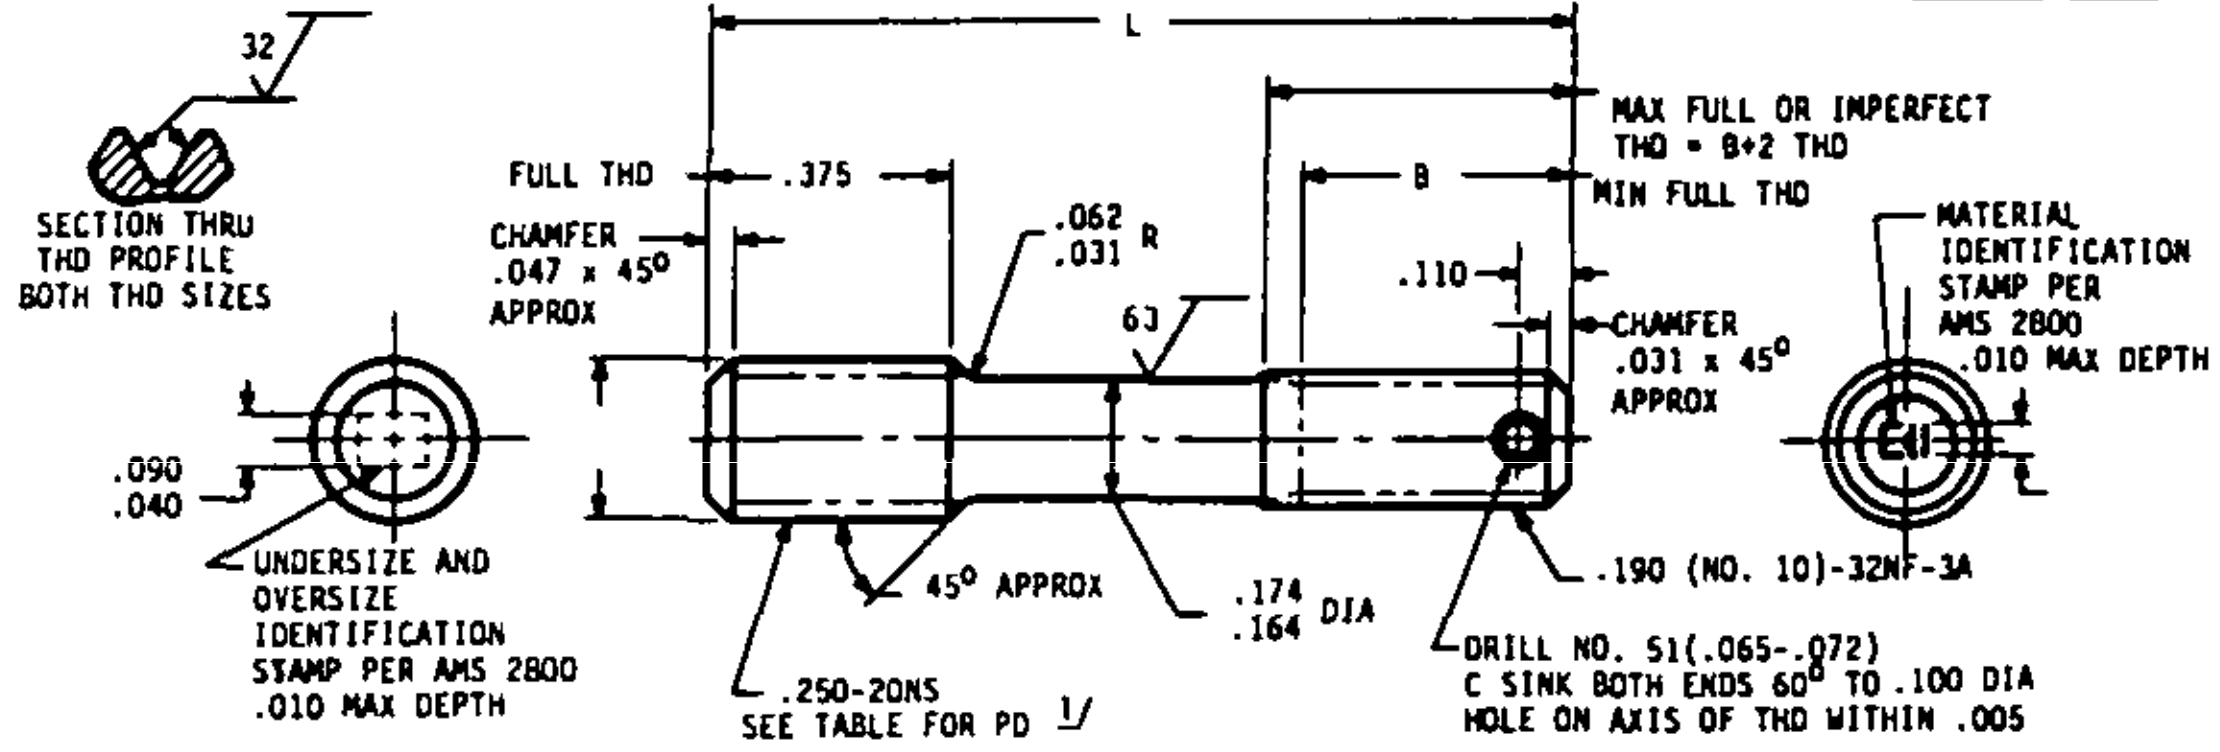

UNDERSIZE AND OVERSIZE IDENTIFICATION		-.003	STANDARD	+.003	+.006	+.009	+.012
		-3	○	3	6	9	12
C 1/ PD BEFORE PLATING PD AFTER PLATING PD LEAD THREAD		.245- .250 .2183-.2193 .2188-.2203 .2125-.2145	.245- .250 .2213-.2223 .2218-.2233 .2155-.2175	.245- .250 .2243-.2253 .2248-.2263 .2185-.2205	.245- .250 .2273-.2283 .2278-.2293 .2215-.2235	.254- .259 .2303-.2313 .2308-.2323 .2245-.2265	.254- .259 .2333-.2343 .2338-.2353 .2275-.2295
L	B	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER	PART NUMBER
.875	.375	AN152619	AN152620	AN152621	AN152622	AN152623	AN152624
.938	.438	AN152625	AN152626	AN152627	AN152628	AN152629	AN152630
1.000	.500	AN152631	AN152632	AN152633	AN152634	AN152635	AN152636
1.062	.500	AN152637	AN152638	AN152639	AN152640	AN152641	AN152642
1.125	.500	AN152643	AN152644	AN152645	AN152646	AN152647	AN152648
1.188	.500	AN152649	AN152650	AN152651	AN152652	AN152653	AN152654
1.250	.500	AN152655	AN152656	AN152657	AN152658	AN152659	AN152660
1.312	.500	AN152661	AN152662	AN152663	AN152664	AN152665	AN152666
1.375	.500	AN152667	AN152668	AN152669	AN152670	AN152671	AN152672
1.438	.500	AN152673	AN152674	AN152675	AN152676	AN152677	AN152678
1.500	.500	AN152579	AN152680	AN152681	AN152682	AN152683	AN152684
1.562	.500	AN152685	AN152686	AN152687	AN152688	AN152689	AN152690
1.625	.500	AN152691	AN152692	AN152693	AN152694	AN152695	AN152696
1.688	.500	AN152697	AN152698	AN152699	AN152700	AN152701	AN152702

1/ PITCH DIAMETERS OF BOTH THREADED ENDS SHALL BE CONCENTRIC WITHIN .006 FIR.

NOTES:

1. MATERIAL: STEEL AMS 6322 (AMS 6320 MATERIAL MAY ALSO BE USED FOR THIS PART UNTIL JANUARY 1, 1957).
2. HARDNESS: ROCKWELL C26-32.
3. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS ARE AFTER PLATING EXCEPT WHERE SHOWN.
4. SURFACE ROUGHNESS: AS 107.
5. MANUFACTURING SPECIFICATION: AMS 7456.
6. ③ INSPECTION: ALL PARTS SHALL UNDERGO MAGNETIC INSPECTION IN ACCORDANCE WITH AMS2640.
7. BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
8. *DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED:*
9. TOLERANCES: LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±2°.

DO NOT USE UNASSIGNED PART NUMBERS.

THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE ENGINE AND PROPELLER UTILITY PARTS COMMITTEE OF THE SAE.

APPROVED 19 MAY 50 REVISED ① 25 MAR 55 ② 14 OCT 81 ③ 30 June 1986.

P.A. 11 OTHER CUST AV AS	AERONAUTICAL STANDARD	AN152601 THRU AN152900	
PROCUREMENT SPECIFICATION NONE	STUD, STEPPED, DRILLED, 1.5 DIA ENGAGEMENT, *.250-20 x .190-32*	SHEET 1	OF 1

DISC Form 1299
APR 76

Project No. 5307-0372

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T14:27Z
Check the source to verify that this is the current version before use.