
MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN END, DOMED HEAD, ALUMINUM ALLOY, CARBON STEEL, CORROSION RESISTANT STEEL

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

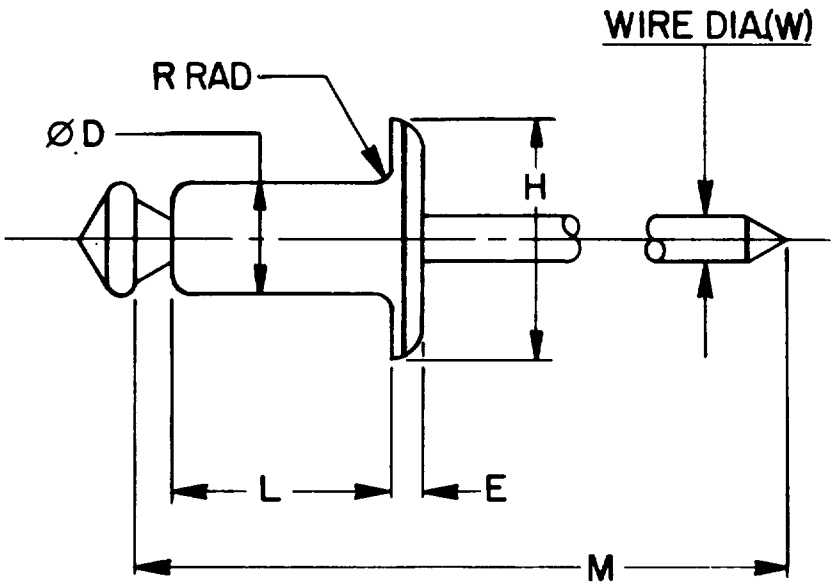

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS

COMBINATION	BODY	MANDREL
A	5056 Aluminum Alloy (UNS A95056)	C1006 - C1025 Steel (UNS G10060-G10250)
B	5052 Aluminum Alloy (UNS A95052)	7178 Aluminum Alloy (UNS A97178)
D	C1006 - C1010 Steel (UNS G10060-G10100)	C1030 - C1060 Steel (UNS G10300-G10600)
F	305 Corrosion Resistant Steel (UNS S30500)	305-431 Corrosion Resistant Steel (UNS S30500-S43100)
G	305 Corrosion Resistant Steel (UNS S30500)	C1040 - C1060 Steel (UNS G10400-G10600)


TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					RECOMMENDED HOLE SIZE
	ØD	H	E	R MAX	W NOM	
.094	.097 .093	.198 .178	.032 .022	.015	.057	.097-.100
.125	.128 .124	.262 .238	.040 .030	.020	.076	.129-.133
.156	.159 .155	.328 .296	.047 .037	.020	.095	.160-.164
.188	.190 .186	.394 .356	.055 .045	.025	.114	.192-.196
.250	.253 .249	.525 .465	.075 .065	.030	.151	.257-.261

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code in thirty-seconds of an inch, followed by a maximum grip code in sixteenths of an inch taken from Table III.

EXAMPLE: M24243/1B402

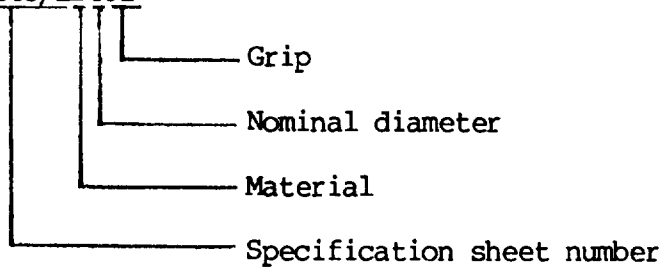

M24243/1B402 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, domed head, 5052 (UNS A95052) aluminum body, 7178 (UNS A97178) aluminum mandrel; nominal body diameter size, .125; grip range, .063-.125.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATERIAL COMBINATIONS					L	M NOM	RECOM GRIP RANGE
A	B	D	F	G			
A302 A304	B302 B304 B306	D302 D304			.210-.232 .330-.365 .460-.490	1.438	.063-.125 .126-.250 .251-.312
A401 A402 A403 A404 A405	B401 B402 B403 B404 B405	D401 D402 D403 D404 D405	F402 F403 F404	G402 G403 G404	.173-.203 .235-.265 .298-.328 .360-.390 .423-.453	1.563	.040-.062 .063-.125 .126-.187 .188-.250 .251-.312
A406	B406	D406			.485-.515	1.688	.313-.375
A408	B408	D408			.610-.640	1.813	.376-.500
A502 A503 A504 A506	B502 B503 B504 B506	D502 D503 D504 D506			.260-.290 .323-.353 .385-.415 .510-.530	1.688	.040-.125 .126-.187 .188-.250 .251-.375
A508	B508	D508			.635-.665	1.813	.376-.500
A602 A604 A606	B602 B604 B606	D602 D604 D606	F602 F604	G602 G604	.285-.315 .410-.440 .535-.565	1.875	.063-.125 .188-.250 .251-.375
A608 A610	B608 B610	D608 D610			.660-.690 .785-.815	2.063	.376-.500 .501-.625
A612		D612			.910-.940	2.188	.626-.750
A616					1.160-1.190	2.375	.876-1.000
A804 A806 A808		D804 D806 D808			.460-.490 .585-.615 .710-.740	2.125	.125-.250 .251-.375 .376-.500
A810					.835-.865	2.250	.501-.625
A812		D812			.960-.990	2.500	.501-.750
		D816			1.210-1.240	2.625	.751-1.000

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV, MI
Air Force - 11, 82

User Activities:
National Security Agency - NS

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 5320-0608-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:37Z
Check the source to verify that this is the current version before use.