
MIL-R-24243/4C
21 September 1987
SUPERSEDING
MIL-R-24243/4B(SHIPS)
24 March 1969

MILITARY SPECIFICATION SHEET

RIVETS, BLIND, NONSTRUCTURAL, RETAINED MANDREL, OPEN-END, 100° COUNTERSUNK HEAD, ALUMINUM ALLOY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the retained mandrel, nonstructural, blind rivets described herein shall consist of this specification and the latest issue of MIL-R-24243.

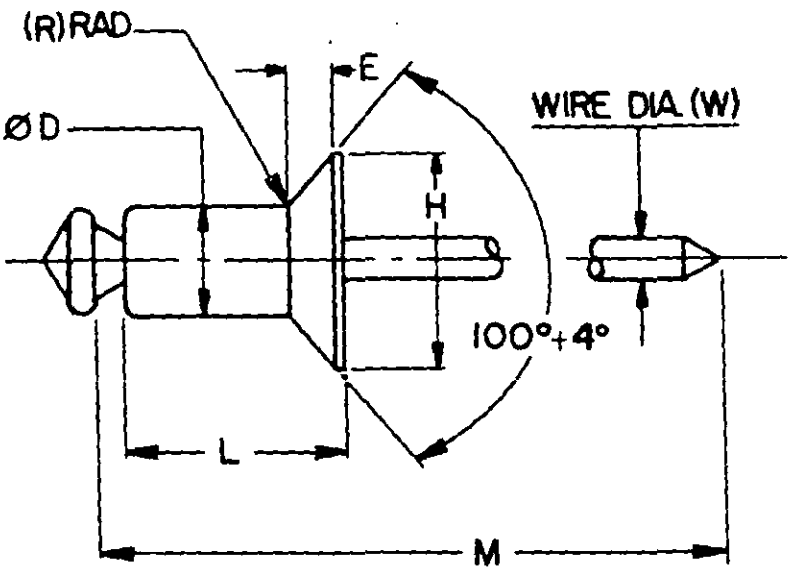

NOTES:
1. All dimensions are in inches.

FIGURE 1. RIVETS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. Blind rivets shall be furnished in the following material combinations and dimensions.

TABLE I. MATERIAL COMBINATIONS


COMBINATION	BODY	MANDREL
A	5056 Aluminum Alloy (UNS A95056)	C1006 - C1025 Steel (UNS G10060-G10250)
B	5052 Aluminum Alloy (UNS A95052)	7178 Aluminum Alloy (UNS A97178)

TABLE II. BASIC DIMENSIONS

NOM DIA	BASIC DIMENSIONS					RECOMMENDED HOLE SIZE
	ØD	H	E REF	R MAX	W NOM	
.125	.128 .124	.233 .207	.045	.025	.076	.129-.133

2. Part Number. The part number shall consist of the letter "M", the basic number of this specification sheet, followed by a material combination code, followed by a nominal body diameter size code in thirty-seconds of an inch, followed by a maximum grip code in sixteenths of an inch taken from Table III.

EXAMPLE: M24243/4A403

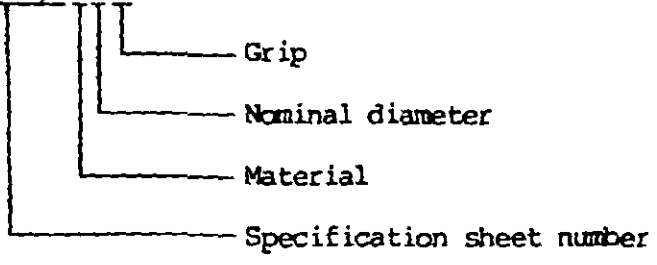

M24243/4A403 Indicates - Rivet, blind, nonstructural, retained mandrel, open-end, 100° countersunk head, 5056 (UNS A95056) aluminum alloy body, C1006-C1025 (UNS G10060-G10250) steel mandrel; nominal body diameter size, .125; grip range, .126-.187.

3. Revision letters are not used to denote changes due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.

TABLE III. DASH NUMBERS AND DIMENSIONS

MATL COMB		L	M NOM	RECOM GRIP RANGE
A	B			
A402	B402	.235-.265	1.563	.063-.125
A403		.298-.328		.126-.187

Custodians:
Army - AR
Navy - AS
Air Force - 99

Review Activities:
Army - AV, MI
Air Force - 11, 82

User Activities:
National Security Agency - NS

Preparing Activity:
Navy - AS

Agent:
DLA - IS

(Project 5320-0608-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T20:38Z
Check the source to verify that this is the current version before use.