A-A-50019B
March 18, 1988
SUPERSEDING
A-A-50019A
September 16, 1986

COMMERCIAL ITEM DESCRIPTION

RACKS, MILK CONTAINER, MOBILE
AND
RACKS, EGG CONTAINER, MOBILE

The General Services Administration has authorized the use of this commercial item description in preference to MIL-R-43979A.


1. CLASSIFICATION

1.1 Classification. This Commercial item description covers racks of the following types and classes, as specified (see 5.2):

Type M - Milk container racks
Type E - Egg container racks

Class 1 - With bumpers
Class 2 - Without bumpers

1.2 Part identification number. The part identification number shall consist of the commercial item description number, the type letter and the class number as follows:

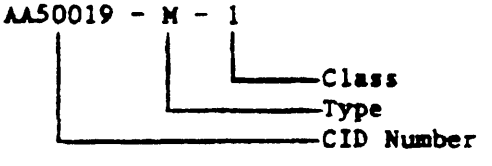

2. SALIENT CHARACTERISTICS

2.1 Design and construction. Both types of racks shall be open frame, foldable, all welded construction. The frame and shelves shall be made from stainless steel. The shelves may be of slotted, solid, or wire construction, and shall be level with rack resting on a horizontal floor. The dimensions of the racks shall not exceed 69 inches high x 40 inches wide x 29 inches deep. Racks shall be equipped with four, 6-inch minimum diameter swivel casters with permanently sealed bearings, securely attached and capable of being removed in the event replacement becomes necessary. The casters shall be firmly fastened to the rack with nuts, bolts and lockwashers, and shall not protrude beyond the rack frame. Both casters on either long side of the rack shall be equipped with brakes. Class 1 racks shall be equipped with vertical corner bumpers.

FSC 7320

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:37Z
Check the source to verify that this is the currentversion before use.

2.1.1 Type M racks. Type M racks uniformly loaded with 750 pounds shall be capable of rolling over a 1/8 inch obstacle at an approach speed of approximately 30 feet per 10 seconds without any damage to rack or casters. Type M racks shall have five shelves. Each shelf, including the top shelf, shall have a rail(s) to prevent milk containers from falling off while in transit. The type M rack shall have a design capacity for any of the following:

a. 120 one-gallon containers of milk.
b. 270 half-gallon containers of milk.
c. 480 one-quart containers of milk.

The spacing between shelves shall be 10-7/8 inches ± 1/2 inch. The bottom shelf shall be located 10 inches ± 1 inch from the floor.

2.1.2 Type E racks. Type E racks uniformaly loaded with 450 pounds, shall be capable of rolling over a 1/8 inch obstacle at an approach speed of approximately 30 feet per 10 seconds without any damage to rack or casters. Type E racks shall have three shelves with a total design capacity of 360 dozen eggs in cartons. The racks shall have vertical bars extending the height of the rack on the back and sides. The spacing between bars shall not be greater than 3-1/2 inches on the back and 4-1/2 inches on the sides. The bottom shelf shall be located 8 inches ± 1 inch from the floor, the spacing between the middle and top shelf shall be 20 inches ± 1 inch, and the spacing between the bottom and middle shelf shall be 20 inches ± 1 inch.

2.2 Data name plate (Government unique requirement see 5.4). The racks shall be furnished with a data name plate in accordance with the applicable requirements of MIL-STD-130 except the requirements for: (a) Methods of applying; (b) Identification tags; (c) Information not required and (d) Optional marking information shall not apply. The data plate shall be made of minimum 20 gauge corrosion-resisting metal and attached to the rack by rivets, screws or welding in such a manner as to meet the applicable National Sanitation Foundation sanitary requirements for this equipment. The plate shall contain the following information which shall be stamped, engraved or applied by photosensitive means:

National Stock Number
Procurement Contract Number
Specification Data
Manufacturer's Name, Address and Telephone Number
Supplier's Name, Address and Telephone Number (List only if different from Manufacturer)
Manufacturer's Model Number
Government Approved Manual Number (When specified, see 5.2)

Each plate shall be placed so that it is readily visible to the operator during normal operating use and so as to not adversely affect the life and utility of the item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

2.3 Hardware. All hardware shall be smooth, fabricated of material with integral or plated finish, easily cleanable and secured so it can be replaced easily when broken or worn out. Hardware shall not have open seams, recesses or unecessary projections. Threaded fasteners shall be drawn tight.

2.4 Sanitation. The rack shall be designed and fabricated to be smooth, washable, free of unnecessary ledges, projections or crevices, and readily accessible for cleaning. Materials not otherwise specified shall be corrosion resistant, non-absorbent, and shall be durable under normal use conditions. Racks shall comply with the requirements of the National Sanitation Foundation Standard No. 2, Food Service Equipment.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify that the product offered meets the salient characteristics and requirements of the description and except for those government unique requirements specified, conforms to the producer's own drawings, specifications, standards, and quality assurance practices, and is the same as the product offered for sale in the commercial marketplace. The contractor shall certify the product meets the "Government unique" requirements except when specific quality assurance provisions are specified for the Government unique requirements. In this case, the contractor shall provide data resulting from inspection conducted in accordance with the specified quality assurance. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial. Each rack shall be cleaned, preserved, packaged, packed and unitized in accordance with ASTM D 3951.

4.3 Export packaging. Each rack shall be cleaned, preserved and cushioned to protect against corrosion, deterioration and physical damage during shipping and storage. If casters are removed, they shall be packaged in a fiberboard box conforming to type PPP-B-636, type CF or SF, class domestic, style optional.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.

4.3.1 Export packing. Each rack with its packaged parts shall be packed flat on its side in a crate conforming to type IV, style A of MIL-C-52950. The contents shall be anchored and each crate shall be closed and strapped in accordance with MIL-C-52950.

4.3.2 Palletization. When specified (see 5.2), shipping containers shall be palletized in accordance with MIL-STD-147.

4.4 Marking (commercial and export). Marking of unit pack, shipping container and unit load shall be in accordance with MIL-STD-129, or ASTM D 3951 as applicable.

5. NOTES

5.1 Intended use. This commercial item description covers milk racks and egg racks designed to transport milk containers and eggs in cartons, respectively, from loading or storage areas to merchandiser type display cases, where they will be on display for customer self service.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Type and class required (see 1.1).
c. The government approved manual number to be included on the data name plate when manuals are purchased under the contract (see 2.2).
d. Selection of applicable levels of packaging and packing required (see 4.1).
e. When palletization is required (see 4.3.2).

5.3 Sources of documents.

5.3.1 Source of government documents. Copies of military and Federal documents are available from:

Naval Publications and Forms Center
5801 Tabor Avenue
Philadelphia, PA 19120

5.3.2 Sources of nongovernment association documents.

ASTM D 3951 - Standard Practice for Commercial Packaging is available from:

The American Society for Testing and Materials
1916 Race Street
Philadelphia, PA 19103

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:37Z
Check the source to verify that this is the currentversion before use.

NSF Standard No. 2 - Food Service Equipment is available from:

National Sanitation Foundation
3475 Plymouth Road
P.O. Box 1468
Ann Arbor, MI 48106

5.4 Government unique requirements. Whenever "(Government unique requirements)" is included in the title of a paragraph under "salient characteristics" it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians:

Army - GL
Air Force - 99

Review activities:

Army - MD, TS
Air Force - 84
DLA - GS

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project No. 7320-0815

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:37Z
Check the source to verify that this is the current version before use.