INCH-POUND

A-A-50590A
12 December 2019
SUPERSEDING
A-A-50590
21 Februrary 1992

COMMERCIAL ITEM DESCRIPTION

LAMP, INCANDESECENT, G-3-1/2, MINIATURE BAYONET, SINGLE CONTACT

The General Services Administration has authorized the use of this commercial item description (CID), for all federal agencies.

1. SCOPE. This commercial item description covers G-3-l/2 incandescent lamps with a miniature bayonet base. The lamps are used for automotive, indicator, instrument, and distress marker applications. These lamps can be identified by the industry numbers specified in Table I and Table II.

2. CLASSIFCATION. The lamps shall be classified by the dash numbers listed in table I (see 3.1).

3. SALIENT CHARACTERISTICS.

3.1 Physical:

Bulb designation	G-3-l/2 (in accordance with ANSI C78.79)
Bulb finish	(See table 1 lamp characteristics)
Base designation	Miniature bayonet (in accordance with NEMA C81.61)
Filament type	(See table 1 lamp characteristics)
Dimensions	(See figure 1)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: STDZNMGT@dla.mil or DLA Aviation-VEB, 8000 Jefferson Davis Highway, Richmond VA 23297-5610. Since contact information can change you may want to verify the currency of the address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

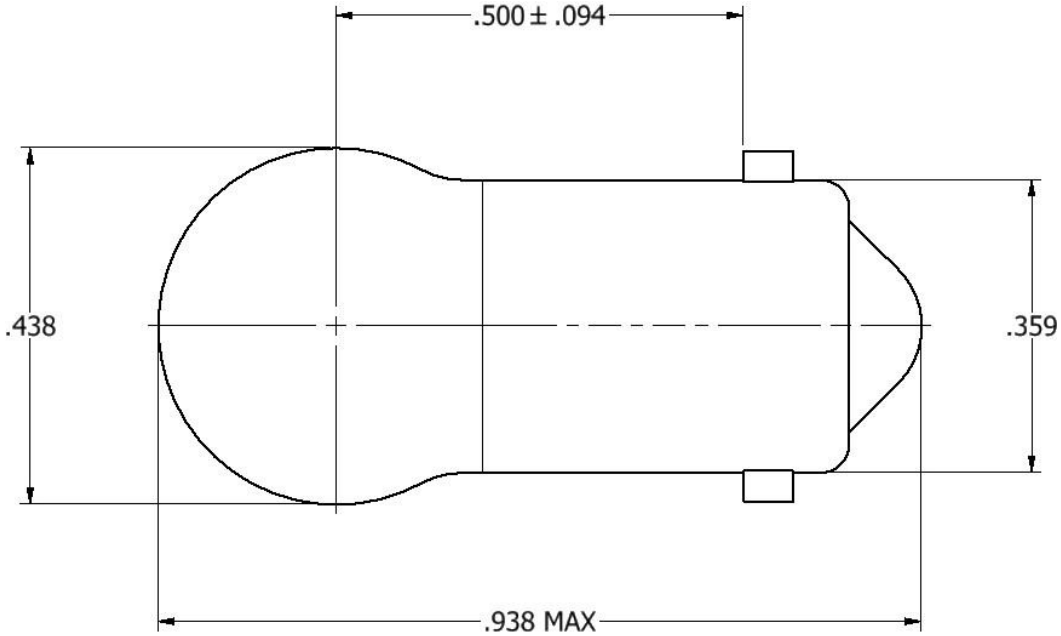


FIGURE 1. Lamp dimensions (inches).

Note:

1. All other dimensions are nominal.
2. Base dimensions are only nominal and should follow NEMA C81.61.

TABLE I. Lamp Characteristics.

PIN	INDUSTRY NUMBER[1]	RATED VOLTS	DESIGN AMPS	CANDLE POWER (APPROX)	FILAMENT TYPE	AVG. LIFE (HOURS)
A50590-1	51	6[2]	0.22	1	C-2R	1000
A50590-2	51R	6	0.22	0.1	C-2R	1000
A50590-3	356	28	0.17	3.5	C-2V	500
A50590-4	53	12[2]	0.12	1	C-2V	1000
A50590-5	1450	24	0.035	0.23	C-2V[2]	3000
A50590-6	354	2.47	0.30	0.50	C-2R	15

[1] R designates a red bulb finish. Other lamps have a clear bulb finish.
[2] Does not match industry number value.
[3] Filament types shall be in accordance with ANSI C78.390.

4. REGULATORY REQUIREMENTS. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

5. PRODUCT CONFORMANCE.

5.1 Product Conformance. The products provided shall meet the salient characteristics of this commercial item description, conform to the producer's own drawings, specifications, standards, and quality assurance practices, and be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.

5.2 Market Acceptability. The product offered must have been previously sold either to the government or on the commercial market.

6. PACKAGING. Preservation, packing, and marking shall be as specified in the acquisition order (see 7.2(c)).

7. NOTES.

7.1 Source of Documents.

7.1.1 Copies of ANSI-C81.61 and ANSI-C78.390 may be purchased from the National Electrical Manufacturers Association. https://www.nema.org/

7.2 Ordering Data. The acquisition order should specify the following:

a. CID document number, revision, and CID PIN.
b. Product conformance provisions.
c. Packaging requirements.

7.3 National Stock Numbers (NSNs). The following is a list of NSNs assigned that correspond to this CID. The list may not be indicative of all possible NSNs associated with the CID.

6240000131282
6240006864662
6240012086228
6240001557866
6240000115273
6240000131282
6240006864662
6240001325342
6240002690963
6240012086228

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

TABLE II. Cross Reference to Specification-Based Part Numbers.

CID PART NUMBER	MS PART NUMBER	INDUSTRY NUMBER	INTENDED USE
A50590-1	MS15573-1	51	Automotive, indicator
A50590-2	MS15573-2	51R	Instrument dial lighting, truck light control
A50590-3	MS15573-3	356	Instrument, indicator
A50590-4	MS15573-4	53	Automotive
A50590-5	MS15573-5	1450	Automotive
A50590-6	MS15573-6	354	Distress marker, aircrew

7.4 Subject Term (Key Word) Listing.

Automotive
Indicator
Instrument
Distress marker
Truck light control

Custodians:
Army – CR4
Navy – SH
Air Force – 71
DLA – GS

Preparing Activity:
DLA – GS2
(Project 6240-2020-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organization and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.

Appendix:

Model for reference only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:44Z
Check the source to verify that this is the current version before use.