INCH POUND

A-A-50596
26 February 1992

COMMERCIAL ITEM DESCRIPTION

LAMP, FLUORESCENT, T-12, HIGH OUTPUT-HIGH TEMPERATURE, BASE RECESSED, DOUBLE CONTACT

The General Services Administration has authorized the use of this commercial item description as a replacement for MS18226 which is canceled.

Abstract. This commercial item description covers T-12, high output, high temperature fluorescent lamps with a recessed base. These lamps can be identified by industry number F48T12/CW/HO/HT.

Salient characteristics.

1. Physical.

Bulb designation	T-12
Base designation	Recessed
Dimensions	(See figure 1)
Nominal overall length	48 inches

Nominal overall length includes the proper allowance for standard lampholders.

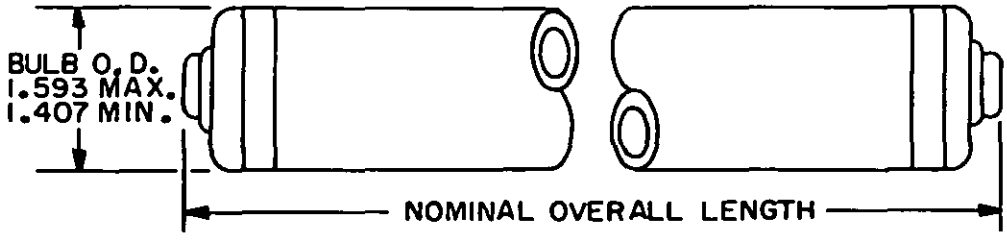


FIGURE 1. Lamp dimensions (inches).

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: Commander, Naval Sea Systems Command, Attn: 55Z3, Washington, DC 20362-5101.

AMSC N/A FSC 6240

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:44Z
Check the source to verify that this is the current version before use.

2. Lamp characteristics.

CID Part number	A50596-1
Industry number	F48T12/CW/HO/HT
Watts	60
Hours life (approx.)	12,000
Initial lumen output	4300

Initial lumen output and wattage values apply to lamps which are fully stabilized, for example, when lamps are burned undisturbed for about 100 hours when new.

Light output peaks at a nominal ambient temperature of 65 degrees Celsius.

Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices. The government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

Regulatory requirements. The offeror/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practical.

Preservation, packaging, packing, labeling, and marking. Preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

Notes.

1. Ordering data. Purchaser should specify the following:

   (a) Title, number, and date of this commercial item description.
   (b) CID part number required (see salient characteristics).

2. Cross reference to specification-based part numbers.

CID part number	A50596-1
MS-based part number	MS18226-1
National Stock Number	6240-00-933-5075

3. For naval users.

A50596-1 is intended for use in symbols 74 and 74.1 of MIL-F-16377/13 - Fixtures, Lighting; Fluorescent, General Lighting, 180 Watts, 120 Volts, 60 Hertz, Dripproof, Symbols 74, 74.1, 75 and 75.1.

Source: https://assist.dla.mil -- Downloaded: 202610-26T08:44Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS:

Custodians
Army - ME
Navy - SH
Air Force - 99

Review activities
Air Force - 82
DLA - GS

Preparing activity:
Navy - SH
(Project 6240-1279)

Source: https://assist.dla.mil -- Downloaded: 202640-26T08:44Z
Check the source to verify that this is the current version before use.