METRIC

A-A-50603
11 February 1993
SUPERSEDING
MIL-L-22250(SHIPS)
18 November 1959

COMMERCIAL ITEM DESCRIPTION

LOUDSPEAKER - MICROPHONE (MEGAPHONE, ELECTRONIC, PORTABLE)

The General Services Administration has authorized the use of this commercial item description as a replacement for MIL-L-22250A(SH) which is cancelled.

Abstract. This Commercial Item Description covers requirements for a hand held electronic megaphone, which is rugged, lightweight, portable, and amplifies audio frequencies for transmitting intelligible speech over distances in excess of 200 meters through high ambient noise levels (85 db). This description covers commercial off-the-shelf megaphone equipment with minor modifications essential to adapt equipment for Military use.

Salient characteristics.

1. Integral Components. The megaphone shall consist of a microphone and housing, loudspeaker assembly, gain control, amplifier, battery compartment and operating handle. In addition the megaphone may include one or more of the following options: hand held microphone, spotlight, siren, whistle, auxiliary vehicle power adapter, or shoulder strap.

2. Enclosure. All megaphones shall be moisture and splash proof as well as corrosion resistant.

Beneficial comments, recommendations, additions, deletions, clarification, etc. and any other data which may improve this document should be sent by letter to: Commander, Naval Sea Systems Command, Attn: 05Q42, 2531 National Center Bldg. 3, Washington, DC 20362-5160.

AMSC N/A FSC 5830

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

2.1 Moisture proofing. All electronic components shall be conformal coated to ensure operability in a moisture laden environment.

2.2 Splash proofing. Microphones and speaker horns shall be constructed of materials that are unaffected when splashed with water.

2.3 Preservation. All parts shall be of suitable corrosion resistance material or materials treated in a satisfactory manor to render them adequately resistant to corrosion caused by sea water.

3. Weight and size. The maximum weight of the megaphone includeing the battery compartment shall be 1.5 kilograms without batteries, the maximum length shall not exceed 350 millimeters and the maximum horn diameter shall not exceed 200 millimeters.

4. Microphone. The microphone shall be an anti-howling, 600 ohm, 1 millivolt, dynamic type microphone mounted in the main body of the megaphone.

5. Horn assembly. The horn assembly shall consist of a horn unit, voice coil, diaphragm assembly and annular plug (if required).

6. Power Output. Megaphones shall operate at a rated output power of at least 10 watts or greater when measured with a 1000 Hertz, 1 millivolt input signal.

7. Power consumption. Megaphone power consumption shall be in accrordance with the guidance listed below.

POWER CONSUMPTION		
RATED POWER	MAXIMUM POWER	MAXIMUM POWER CONSUMPTION
10W	16W	<16W
12W	16W VOICE 25W SIREN	<16W <25W
16W	25W VOICE 40W SIREN	<25W <40W

8. Power Sources. Megaphones shall be powered from dry cell batteries.

9. Equipment Operating Time. The equipment shall operate in excess of five (5) hours voice and thirty (30) minutes siren without requiring a battery change.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.


Quality assurance provisions.

1. Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this Commercial Item Description and that the product conforms to the producer's own drawings, specifications, standards and quality assurance practices. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

2. Regulatory requirements. The offerer/contractor is encouraged to use recovered materials in accordance with Public Law 94-580 to the maximum extent practicable.

3. Preservation, packaging, packing, labeling, and marking. The preservation, packaging, packing, labeling, and marking shall be as specified in the contract or order.

4. Identification numbers. The following part identification numbering procedure is for government purposes and does not constitute a requirement for the contractor.

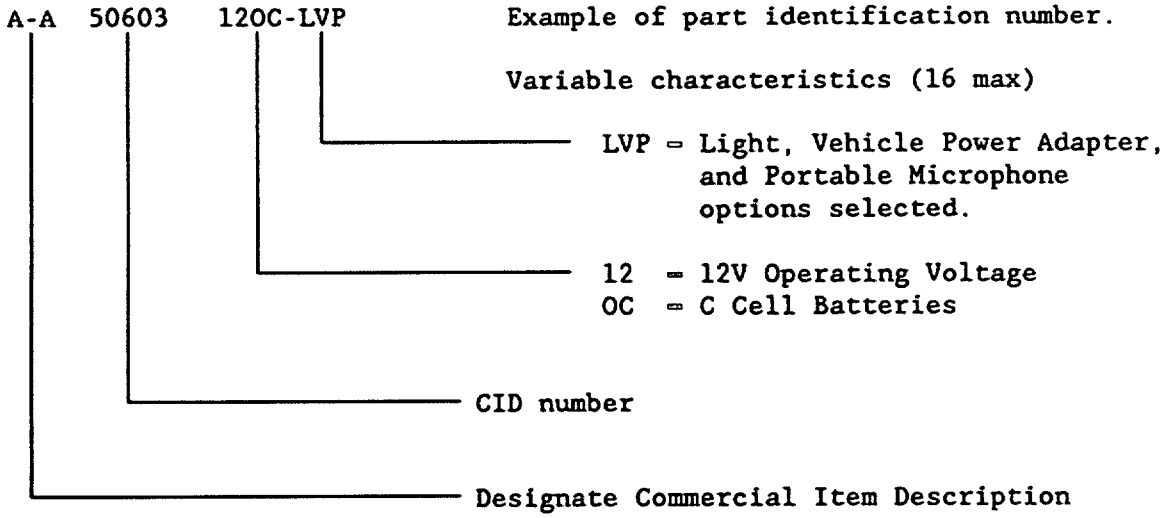

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.

5. Ordering data. Procurement documents should specify the following:

a. Type.
L = Light
W = Whistle
S = Siren
V = Vehicle Adapter
P = Portable Hand Held Microphone
C = Shoulder Strap
A = All

b. Operating Voltage.
09 = 9 vdc
12 = 12 vdc

c. Battery Type.
0C = C cell
0R = R-14
0A = A Cell
AA = AA Cell

MILITARY INTERESTS:

Custodians:
Army - CR
Navy - SH

Review activities:
Army - AT, CE
Navy - AS, TD
Air Force - 13, 85
DLA - DP, ES, GS

User activities:
Navy - YD, CG, MC
Army - MT
Air Force - 90
DLA - IP, IS, LS

CIVIL AGENCY COORDINATING ACTIVITIES:
COMMERCE - NIST
GSA-FSS

Preparing activity:
NAVY- SH
(Project 5830-N094)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:45Z
Check the source to verify that this is the current version before use.