
USER ACTIVITIES:


REVIEWER ACTIVITIES:


This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

FED. SUP CLASS
2320

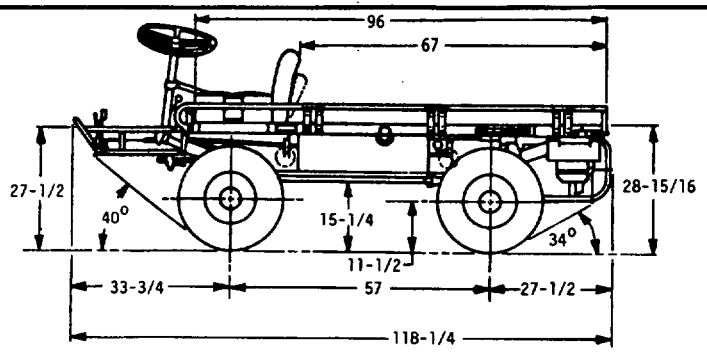





VEHICLE CHARACTERISTICS

CURB WEIGHT: LESS PAYLOAD AND PERSONNEL.

FRONT AXLE	385 LBS.
REAR AXLE	585
TOTAL	970 LBS.

PAYLOAD: LOADED 1000 LBS.

GROSS VEHICLE WEIGHT:
LOADED 1970 LBS.

(REFERENCED WEIGHTS ARE FOR INFORMATION ONLY.)

MINIMUM TURNING DIAMETER:
2, WHEEL STEERING, WALL TO WALL;
LEFT: 44 FT. 5 IN.
RIGHT: 38 FT.

ENGINE: 10919400
TYPE: MILITARY, AIR COOLED, A042
NO. OF CYLINDERS: 2
DISPLACEMENT: 42.4 CUBIC INCHES
BORE: 3.00 IN.
STROKE: 3.00 IN.
COMPRESSION RATIO: 6.8 TO 1
GOVERNED SPEED: 3608 RPM
MAX.HP. 13.5, NET 12.5 AT 3000 RPM
MAX. TORQUE 26 FT. LBS., NET 25 FT.LBS. AT 2300 RPM

TRANS & REAR AXLE ASSY: 11592089
TYPE: SYNCHROMESH
FORWARD SPEEDS: 3, REVERSE:1
GEAR RATIO: LOW 2.93:1 2.93:1
SECOND 1.71:1
HIGH 1.00:1

TRANSFER TRANSMISSION: 2 SPEED, MILITARY
GEAR RATIO: HIGH 2.44
LOW 4.56

FORDING DEPTH: W/KIT 48 IN.
WO/KIT 18 IN.

FRONT AXLE: 10945109

FRAME ASSEMBLY:
SIDE RAIL, TUBULAR
SECTION MODULUS .679 IN^3
NO. CROSS SECTION, THREE

TIE DOWNS:
LOCATION: PLATFORM, EACH SIDE OF HAND-RAILS LIFTING SHACKLES:
FRONT INST'N., CENTER OF PLATFORM
REAR INST'N., 2, CORNERS OF PLATFORM
AXLE MOUNTED AIR BORNE, SLINGING PROVISIONS

WHEELS: 11592144
SIZE: 10 X 5-1/2 IN., ALUMINUM

TIRES: TUBE-TYPE, NDMS
SIZE: 7-1/2 X 10 - 4 PLY

BRAKES: SERVICE, ROCKWELL MODEL DLM-7-50
DRUM SIZE: 7-1/4 X 1-1/2
BRAKE, PARKING: CABLE AND CAM WITH HAND RATCHET

ELECTRICAL SYSTEM:
STARTING SYSTEM: MANUAL PULL WITH REWIND CABLE
GENERATOR: MAGNETO

REFLECTORS: TAPE, REFLECTIVE 7049701
LOCATION: EDGE OF PLATFORM

PERFORMANCE: LOADED
CRUISING RANGE, HIGHWAY: 79 MILES
MAXIMUM SPEED, LOADED 25 MPH

KIT PROVISIONS:
LITTER KIT, P/N 10944804
ADAPTION KIT, 106 MM RIFLE, BAT WEAPON 5702376

DEEP WATER FORDING KIT: 5702841

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FORM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 27 MAY 1966 REVISED (8) 20 MAY 85

MS PART NO	ENGINEERING DWG NO.
MS500052-1	8736756

P. A.	INTERNATIONAL INTEREST	TITLE
ARMY-AT Other Cust		TRUCK, PLATFORM, UTILITY: 1/2-TON, 4X4, M274A5

MILITARY STANDARD
MS500052(AT)

PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET | OF |
MIL-T-45317		

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.

U.S. GOVERNMENT PRINTING OFFICE: 1985 — 505-038/23557