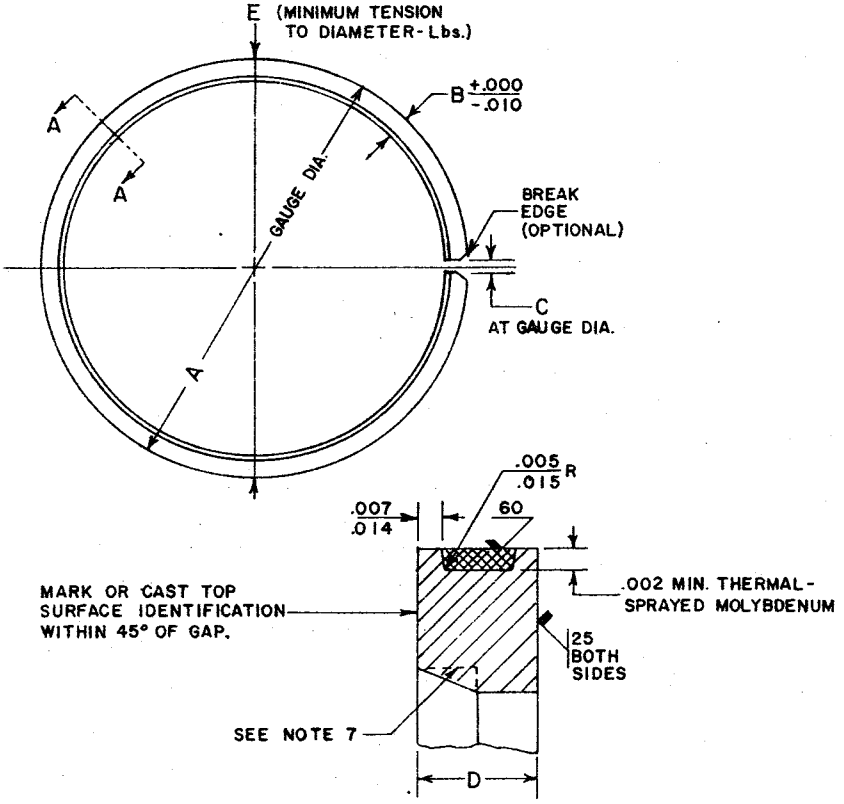


SECTION A-A ENLARGED

NOTES:

(A) 1. LIGHT TIGHTNESS: MUST BE LIGHT - TIGHT, BLURRY OR FUZZY LIGHT PERMISSIBLE.
2. MATERIALS: SAE-J929 CAST IRON (SEE NOTE 10).
3. SURFACE TREATMENT: CAST IRON SURFACES SHALL BE CHEMICALLY TREATED FOR SCUFF AND CORROSION RESISTANCE.
4. ALL DIMENSIONS IN INCHES.
5. FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREME NT DOCUMENTS REFERENCED HEREIN.
6. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
(A) 7. ADJUST BEVEL OR COUNTERBORE TO PROVIDE .0005 TO .0018 TWIST PER .100 OF RING WALL THICKNESS 180° FROM GAP.
8. TOP SURFACE IDENTIFICATION: MARK OR CAST TOP SURFACE IDENTIFIC ATION WITHIN 45° OF GAP.
9. THE MS PART NUMBER CONSISTS OF THE MS NUMBER PLUS THE DASH NUMBER - EXAMPLE: MS 39348-1.
10. FOR DASH 1 (-1) RINGS, OPTIONAL MATERIAL IS T. P. M-89, H. S. C. I. , HARDNESS - ROCKWELL "B"98-106.
(A) 11. FOR PROCUREMENT PURPOSES OF RINGS FOR MS PISTONS SEE MS 39351.
12. RINGS ARE TO BE PROCURED AS SETS ONLY.
(A) 13. MS 39348 SUPERSEDES MS 13933-1 THRU -24 AND MS 13933-34 THRU -39 RESPECTIVELY.
(A) 14. STATUS AND INTERCHANGEABILITY: PISTON RING IDENTIFIED BY MS 13933-1 THROUGH -24 AND -34 THROUGH -39, HAVE BEEN CANCELLED/INACTIVATED. THE SUPERSEDING DASH NUMBERS IN MS 39348 ARE IDENTICAL TO THE SUPERSEDED DASH NUMBER IN MS 13933.

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

REVIEW ACTIVITIES: AV, AT
USER ACTIVITIES MC, YD

APPROVED 2 AUG. 1971 REVISED (A) 22 FEBRUARY 1973

P.A. ME
Other Cust
AIR FORCE - 82

TITLE
RING, PISTON, MOLYBDENUM FACING : ENGINE, TOP COMPRESSION

MILITARY STANDARD
MS 39348

PROCUREMENT SPECIFICATIONS: MIL-E-11275

SUPERSEDES: (A) MS 13933 IN PART

SHEET 1 OF 2

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:52Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2805

DASH NUMBER	A	B	C	D	E
10					
-1	3.000	.150	.010 .020	.0930/.0940	6.5
-2	3.020	.150	.010 .020	.0930/.0940	6.5
-3	3.040	.150	.010 .020	.0930/.0940	6.5
-4	3.250	.162	.010 .020	.0930 .0940	7.5
-5	3.270	.162	.010 .020	.0930 .0940	7.5
-6	3.290	.162	.010/.020	.0930/.0940	7.5
-7	3.4375	.172	.010 .020	.0930 .0940	7.5
-8	3.4575	.172	.010 .020	.0930/.0940	7.5
-9	3.4775	.172	.010 .020	.0930/.0940	7.5
-10	3.750	.187	.010/.020	.0930/.0940	8.5
-11	3.770	.187	.010 .020	.0930/.0940	8.5
-12	3.790	.187	.010 .020	.0930 .0940	8.5
-13	4.000	.200	.013 .025	.0930/.0940	9.5
-14	4.020	.200	.013/.025	.0930/.0940	9.5
-15	4.040	.200	.013/.025	.0930/.0940	9.5
-16	4.250	.212	.013 .025	.0930/.0940	10.0
-17	4.270	.212	.013 .025	.0930 .0940	10.0
-18	4.290	.212	.013 .025	.0930/.0940	10.0
-19	4.625	.215	.013/.025	.0930 .0940	9.5
-20	4.645	.215	.013 .025	.0930/.0940	9.5
-21	4.665	.215	.013 .025	.0930/.0940	9.5
-22	5.000	.232	.017 .032	.0930 .0940	10.0
-23	5.020	.232	.017 .032	.0930/.0940	10.0
-24	5.040	.232	.017 .032	.0930/.0940	10.0
-34	5.375	.218	.017 .032	.0930/.0940	7.0
-35	5.395	.218	.017 .032	.0930/.0940	7.0
-36	5.415	.218	.017 .032	.0930/.0940	7.0
-37	5.750	.230	.017 .032	.0930/.0940	7.5
-38	5.770	.230	.017 .032	.0930/.0940	7.5
-39	5.790	.230	.017 .032	.0930/.0940	7.5

THIS MILITARY STANDARD IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE. SELECTION FOR ALL NEW ENGINEERING AND DESIGN APPLICATIONS AND FOR REPETITIVE USE SHALL BE MADE FROM THIS DOCUMENT.

REVIEW ACTIVITIES:

PREPARING ACTIVITIES

APPROVED 2 AUG. 1971 REVISED (A) FOR CHANGES SEE SHEET 1

P.A. ME
Other Cust
AIR FORCE - 82

TITLE
RING, PISTON, MOLYBDENUM FACING: ENGINE, TOP COMPRESSION

MILITARY STANDARD
MS 39348
SHEET 2

PROCUREMENT SPECIFICATIONS
MIL-E-11275

SUPERSEDES: MS 13933 IN PART

Source: https://assist.dla.mil -- Downloaded: 2020-10-23T17:52Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (estimated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE