
FED SUP CLASS
3030

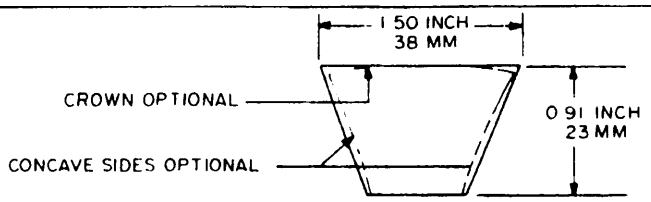

BELT CROSS SECTION, NOMINAL

DASH NUMBER	PITCH LENGTH		TOLERANCE (PLUS OR MINUS)		MATCHING LIMITS FOR ONE SET	
	INCH	M M	INCH	M M	INCH	M M
-E180	184.5	4690	1 0	25	0 45	1 0
-E195	1995	5070	1 1	30	0 45	1 0
-E210	2145	5450	1 1	30	0 45	1 0
-E240	241.0	6120	1 3	30	0 45	1 0
-E270	2710	6880	1 6	40	0 60	1 6
-E300	3010	7650	1 6	40	0 60	1 6
-E330	3310	8410	2 0	60	0 60	1 6
-E360	3610	9170	2 0	60	0 60	1 6
-E390	3910	9930	2 0	60	0 75	2 0
-E420	4210	10690	3 3	80	0 75	2 0
-E480	4810	12220	3 3	80	0 75	2 0
-E540	5410	13740	3 3	80	0 90	2 4
E600	6010	15270	3 3	80	0 90	2 4
-E660	6610	16790	3 3	80	0 90	2 4

NOTES

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM)
2. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS
3. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT NUMBERS EXAMPLE -E180, E INDICATES CROSS SECTION DESIGNATION INCH DIMENSIONS, 180 INDICATES PITCH LENGTH OF 184 5 INCHES
4. OIL-RESISTANCE SEE APPLICABLE PARAGRAPH IN ZZ-B-225 WHEN OIL-RESISTANCE IS REQUIRED THE FIRST DASH OF THE MS PART NUMER SHALL BE REPLACED BY THE LETTER "R"
5. THE MS PART NUMBER FOR INDIVIDUAL BELTS SHALL CONSIST OF MS SHEET NUMBER, PLUS THE LETTER "R" FOR OIL-RESISTANCE (WHEN APPLICABLE) AND THE DASH NUMBER

EXAMPLES

MS 39259 - E 180

- 180 — PITCH LENGTH (INCH)
- E — BELT CROSS SECTIONAL DESIGNATION

ENTIRE STANDARD REVISED

APPROVED 20 MAY 1965 REVISED (A) 15 NOVEMBER 1967 (B) 22 JUNE 1981

REVIEW ACTIVITIES AV, CS, MC
USER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	YD		BELT,"V": INDUSTRIAL (MULTIPLE DRIVE) "E" CROSS SECTION.	MS 39259
	99			
PROCUREMENT SPECIFICATION ZZ-B-225		SUPERSEDES		SHEET 1 OF 2

DD FORM 672-1

3030-0130

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
3030

6. THE MS PART NUMBER FOR MATCHED SETS SHALL CONSIST OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN APPLICABLE), PLUS THE NUMBER OF BELTS IN SET, PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

EXAMPLES:

MS39259 R 3 E 180

- 180 — PITCH LENGTH (INCH)
- E — BELT CROSS SECTIONAL DESIGNATION
- 3 — NUMBER OF BELT IN THE SET
- R — OIL-RESISTANCE (WHEN APPLICABLE)

7. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

8. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS, SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 20 MAY 1965 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	YD		BELT, "V": INDUSTRIAL (MULTIPLE DRIVE) "E" CROSS SECTION.	MS 39259
	99			
PROCUREMENT SPECIFICATION ZZ-B-225		SUPERSEDES		SHEET 2 OF 2

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:50Z
Check the source to verify that this is the current version before use.