
FED. SUP CLASS
1670

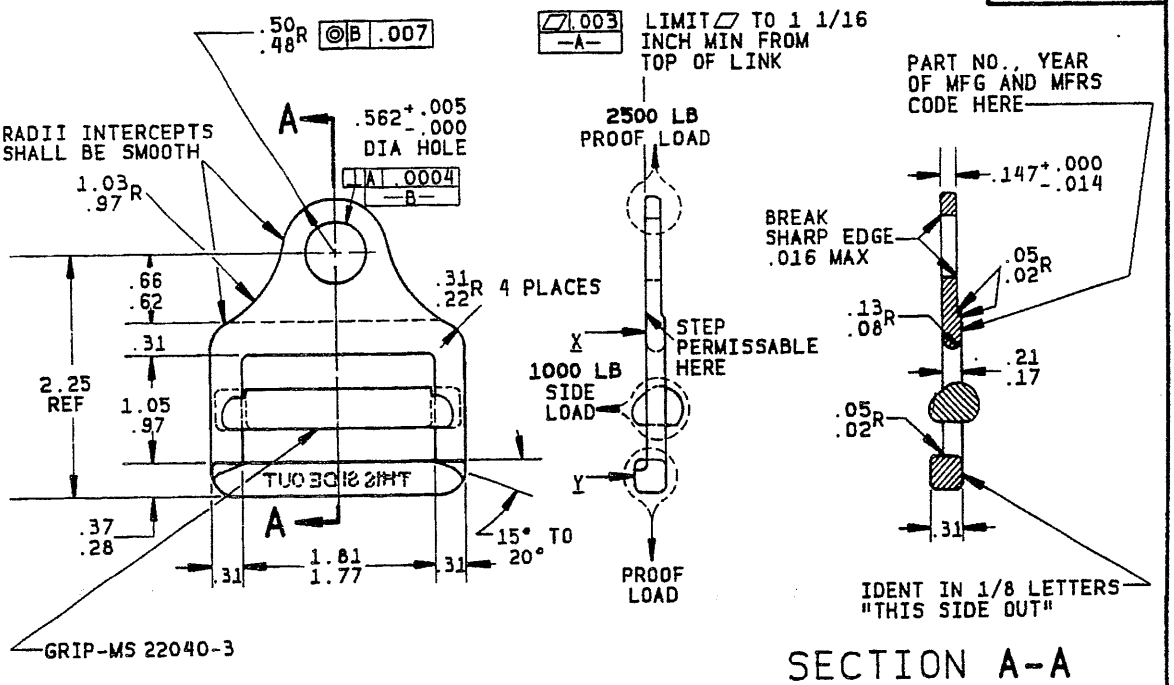

SECTION A-A

NOTES:

MATERIAL: STEEL, MIL-S-5626 OR MIL-S-6049.

SURFACE ROUGHNESS: UNLESS OTHERWISE SPECIFIED SURFACE ROUGHNESS SHALL BE 125 MAX IN ACCORDANCE WITH ANSI B46.1.

FINISH: CADMIUM PLATE, QQ-P-416, CLASS 1, TYPE I, OR IMMERSION ZINC FLAKE/CHROMATE DISPERSION COATING PER MIL-C-87115, CLASS 3.

METHOD OF FORMING: HOT FORGE.

HEAT TREATMENT: 170,000 LBS/SQ IN. TENSILE STRENGTH AFTER ASSEMBLY IN ACCORDANCE WITH MIL-H-6875.

LINK SHALL BE SUBJECTED TO A 2500 POUND PROOF LOAD AND 1000 POUND SIDE LOAD AS INDICATED BY ARROWS. LINK TO BE SUPPORTED AT POINTS X AND Y FOR SIDE LOAD.

DIMENSIONS IN INCHES: EXCEPT AS OTHERWISE SPECIFIED HEREIN, TOLERANCES: ±.03.

ALL PERPENDICULAR SURFACES SHALL INTERSECT WITH A .04-.11 RADIUS UNLESS OTHERWISE SPECIFIED.

BREAK SHARP EDGES AND REMOVE BURRS.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© REDRAWN; REVISED FINISH; ADDED SHEET 2.

APPROVED 30 APRIL 1986
REVISED ©

P.A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE LINK, CONNECTING, QUICK RELEASE	MILITARY STANDARD MS 70116
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG 49B6553		SHEET 1 OF 2

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 1670-0508

USER ACTIVITIES: ARMY-AV NAVY-MC

REVIEWER ACTIVITIES: USAF-82, 99


AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited. This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:25Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
1670

END ITEM EXAMINATION
DIMENSION - FUNCTION TEST

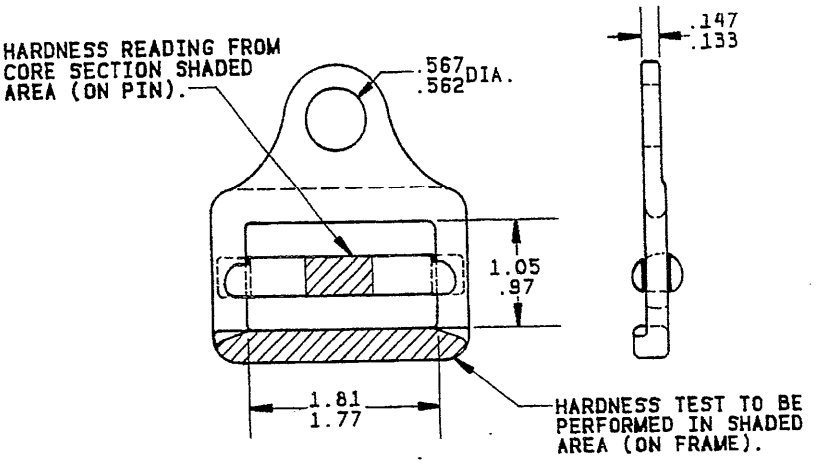

NOTES:

CRITICAL DIMENSIONS: AS SHOWN.

CRITICAL FUNCTIONAL TEST: GRIP BAR SHALL MOVE FREELY.

© ADDED THIS SHEET.

USER ACTIVITIES: ARMY-AV NAVY-MC

REVIEWER ACTIVITIES: USAF-82,99

APPROVED 30 APRIL 1986 REVISED ©

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P. A. ARMY-GL Other Cust NAVY-AS USAF-11	INTERNATIONAL INTEREST	TITLE LINK, CONNECTING, QUICK RELEASE	MILITARY STANDARD MS 70116
PROCUREMENT SPECIFICATION MIL-H-7195	SUPERSEDES: USAF DWG 49B6553		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:25Z
Check the source to verify that this is the current version before use.