
MILITARY SPECIFICATION SHEET

KNOB, CONTROL, BALL

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for procuring the knobs described herein shall consist of this document and the latest issue of specification MIL-K-3926.

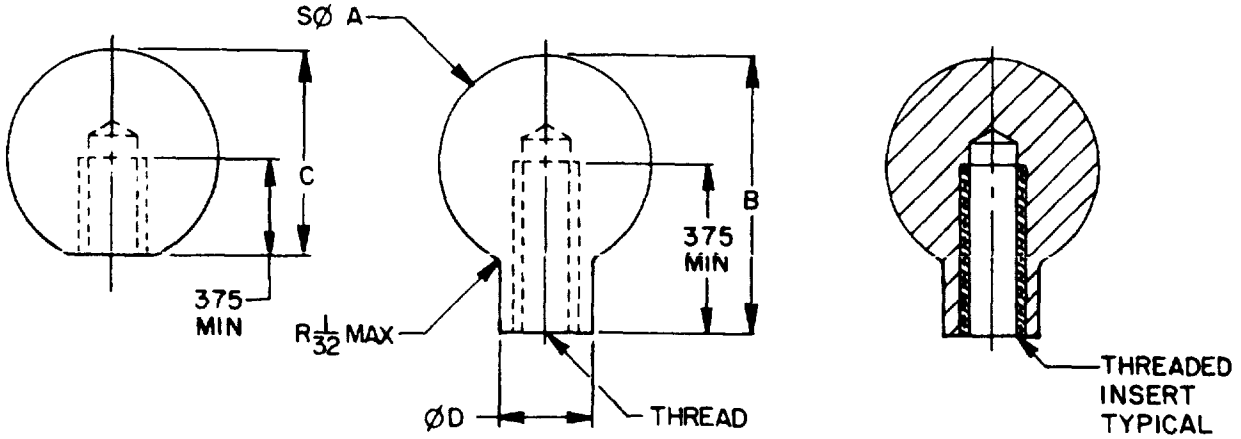

VIEW SERIES 0 AND 1

VIEW SERIES 2 AND 3

NOTE:

1. All dimensions are in inches.

FIGURE 1. KNOB, CONTROL, BALL.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.

TABLE I. CONFIGURATION SERIES NUMBERS.

SERIES	SØ A ±.016	B ±.031	C ±.016	ØD ±.016	THREAD CODE (SEE TABLE II)
0	.750	-	.703	-	A,B
1	1.000	-	.938	-	A,B,C,E
2	1.250	1.500	-	.625	A,B,C,D,E,F
3	1.500	1.812	-	.688	C,D,E,F,G,H

TABLE II. PART NUMBERS.

M3926/1-1 A 1 B

SERIES	THREAD UNC-2B	THREAD UNF-2B	MATERIAL	COLOR
0	A-.1640-32	B-.1900-32	1-Plastic	B-Black
1	E-.2500-20	C-.2500-28	2-Plastic w/insert	R-Red
2	F-.3125-18	D-.3750-24	3-Aluminum	G-Gray
3	G-.3750-16			O-Olive Drab
	H-.4375-14			M-Metallic-Anodize

REQUIREMENTS:

1. Material: Knob - Aluminum Alloy or Plastic.
   Insert - Metal

2. Protective finish: In accordance with MIL-F-7179, Type I.

3. Color: Black lusterless Number 37038, gray lusterless Number 36237, red lusterless Number 31136, olive drab lusterless Number 34087 in accordance with FED-STD-595, metallic (as anodized).

4. Qualification requirements per MIL-K-3926 are excluded for these knobs.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.

Custodians:
Army - ER
Navy - EC
Air Force - 11

Review Activities:
Army - AR, AT, AV, EA, ME
Navy - AS, SH
Air Force - 82, 99
DLA - IS

User Activities:
Army - AR
Navy - CG, MC, OS

Preparing Activity:
Air Force - 11

Agent:
DLA - IS

(Project 5355-0223)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T22:13Z
Check the source to verify that this is the current version before use.